

Final Report
**Review study on the Regulation (EC) No 1222/2009 on the
labelling of tyres**

Prepared by Viegand Maagøe A/S

Contract manager and quality control: Van Holsteijn en Kemna B.V. (VHK)

March 2016



Viegand Maagøe A/S (VM)
Nr. Farimagsgade 37
1364 Copenhagen K
Denmark
viegandmaagoe.dk

Prepared for:

European Commission

DG ENER C.3

Office: DM24 4/149

B-1049 Brussels, Belgium

Contact person: Mr Juan Moreno Acedo

Email: juan.moreno-acedo@ec.europa.eu

Project website: <http://www.labellingtyres.eu/>

With reference to Request for Services No. ENER/C3/2012-418-Lot2/07/2014-558, Review study on Regulation (EC) No 1222/2009 of the European Parliament and of the Council on the labelling of tyres with respect to fuel efficiency and other essential parameters.

In the context of Framework Contract reference ENER/C3/2012-418-Lot 2

Specific contract no.: ENER/C3/2012-418-LOT2/07/2014-558/SI2.707241

The information and views set out in this study are those of the author(s) and do not necessarily reflect the official opinion of the Commission. The Commission does not guarantee the accuracy of the data included in this study. Neither the Commission nor any person acting on the Commission's behalf may be held responsible for the use which may be made of the information contained therein.

This report has been prepared by the authors to the best of their ability and knowledge. The authors do not assume liability for any damage, material or immaterial, that may arise from the use of the report or the information contained therein.

© European Union, October 2015.

Reproduction is authorised provided the source is acknowledged.

More information on the European Union is available on the internet (<http://europa.eu>).

Executive summary

Review study on Regulation (EC) 1222/2009¹ of the European Parliament and of the Council on the labelling of tyres with respect to fuel efficiency and other essential parameters

Tyres, mainly because of their rolling resistance, account for 20-30 % of the fuel consumption of vehicles². Therefore, a reduction of the rolling resistance of tyres could contribute significantly to the energy efficiency of road transport and thus to the reduction of emissions. However, tyres are characterised by a number of parameters, which are interrelated. Improving one parameter, such as rolling resistance, may have an adverse impact on other parameters, such as wet grip, while improving wet grip may have an adverse impact on external rolling noise.

In 2009, the European Parliament and the Council adapted the Tyre Labelling Regulation (Regulation (EC) No 1222/2009) to promote sustainable mobility in the EU. The Regulation entered into force on 1 November 2012. Its aim is to increase the safety as well as the economic and environmental efficiency of road transport by promoting fuel efficient and safe tyres with low external rolling noise. The tyre labelling provides harmonised information about fuel-efficiency, wet grip and external rolling noise, as explained in more detail in **Chapter 1 Existing Legislation**. The intention is to encourage the manufacturers to optimise relevant parameters beyond the standards already achieved and to influence end-users' purchasing decisions in favour of safer, quieter and more fuel-efficient tyres.

The Tyre Labelling Regulation covers tyres for passenger cars (C1 tyres), tyres for light commercial vehicles (C2 tyres) and tyres for heavy-duty vehicles (C3 tyres)³. Retreaded tyres, studded tyres and tyres for a number of specific applications, such as racing and spare tyres, are exempted⁴. The Tyre Labelling Regulation Ranks tyre on a scale from 'A' to 'G' on both fuel efficiency and wet grip, whereas external rolling noise is shown as a measured value and a three-step scale. The label design is based on that from the Energy Labelling Directive⁵ for energy related products, since this design is well known by consumers⁶.

The Tyre Labelling Regulation is closely related to the Tyre Type Approval Regulation⁷, which is designed to remove the worst tyres from the market in terms of the same parameters. It sets out minimum requirements for rolling resistance, wet grip (for C1 tyres only) and external rolling noise. Furthermore, the Tyre Labelling Regulation is referred to in the Energy Efficiency Directive 2012/27/EU⁸, which lays down requirements for public procurement of tyres in Annex III. Central Governments must purchase tyres of the highest fuel efficiency class, and in their tenders for service contracts, require that service providers for the service in question only use tyres in the highest fuel efficiency class.

Regarding the Review of the Tyre Labelling Regulation, Article 14 of the Regulation reads as follows:

1. The Commission shall assess the need to review this Regulation, taking into account, inter alia:

¹ Regulation (EC) No 1222/2009 of the European Parliament and of the Council

² Regulation (EC) No 1222/2009 of the European Parliament and of the Council

³ Regulation (EC) No 661/2009 of the European Parliament and of the Council, Article 8

⁴ Regulation (EC) No 1222/2009 of the European Parliament and of the Council, Article 2.2 details which tyres are not included in the scope of the Regulation

⁵ Directive 2010/30/EU of the European Parliament and of the Council

⁶ Regulation (EC) No 1222/2009 of the European Parliament and of the Council

⁷ Regulation (EC) No 661/2009 of the European Parliament and of the Council

⁸ Directive 2012/27/EU of the European Parliament and of the Council

- (a) the effectiveness of the label in terms of end-user awareness, in particular whether the provisions of Article 4(1)(b) are as effective as those of Article 4(1)(a) in contributing to the objectives of this Regulation;
- (b) whether the labelling scheme should be extended to include retreaded tyres;
- (c) whether new tyre parameters, such as mileage, should be introduced;
- (d) the information on tyre parameters provided by vehicle suppliers and distributors to end-users.

According to this article, the need for a revision must be assessed, and the results of the assessment must be presented to the European Parliament and the Council. An important aspect is to assess the end-users' awareness and understanding of the label and the possibilities to extend the labelling scheme to include additional types of tyres and new tyre parameters.

In that sense, and in the context of the Framework Contract Lot 2: Review Studies and related technical assistance on eco-design and energy labelling implementing measures, signed on 23 January 2013 between Van Holsteijn en Kemna BV and the Directorate General for Energy (reference ENER/C3/2012-418 Lot 2), the Directorate General requested a proposal for an assignment aimed at carrying out a Review study on Regulation (EC) No 1222/2009 of the European Parliament and of the Council on the labelling of tyres with respect to fuel efficiency and other essential parameters.

The aim of the review study is to investigate the needs and possibilities for revision of the Regulation, assessing:

- The end-users' understanding of the label and the consumers' buying behaviour;
- The sufficiency of the information provided by vehicle suppliers and distributors on tyre parameters;
- The possibility to extend the labelling scheme to include retreaded tyres and mileage;
- The possibility to adapt the labelling requirements to technical progress of the grip grading of tyres primarily designed to perform better in ice and/or snow conditions;
- The possibility to improve the clarity of the regulation, avoiding grey areas;
- The ability of the regulation to achieve market transformation;
- The differentiation on the level of enforcement of the regulation by the different Member States and a potential reinforcement of market surveillance;
- Any other relevant aspects that might require an adaptation of the regulation, such as i.a. the handling of studded tyres or the possibility to establish a registration database.

The methodology used to perform this review study is partially based on the MEERp methodology (stock modelling and scenarios), with addition of surveys to consumers and stakeholders in the tyre supply chain and the assessment of market surveillance activities, and in a proportionate way on the Commission's Better Regulation Guidelines⁹ and the Better Regulation criteria enshrined therein.

Market transformation

In **Chapter 3 Market Transformation achieved with existing legislation**, the Tyre Labelling Regulation's effect on the C1, C2 and C3 replacement tyre markets are analysed in terms of how the three labelling parameters have developed.

⁹ European Commission (2015), Commission staff working document "Better Regulation Guidelines". Link: http://ec.europa.eu/smart-regulation/guidelines/toc_guide_en.htm

The Tyre Labelling Regulation was implemented in November 2012. For all the performance parameters included in the scheme (fuel efficiency, wet grip and external rolling noise), it has been able to transform the market in a positive direction from 2013 to 2015, although the positive tendency is less obvious for external rolling noise than for fuel efficiency and wet grip.

Market data was purchased from two large databases, TOL¹⁰ (Germany) and VACO¹¹ (Holland), and supplemented with information from industry associations to create a tyre stock model for use in scenario calculations. Analysis of the market data shows that the Tyre Labelling Regulation has driven an increased R&D and technology innovation effort, resulting in increased wet grip performance of tyres, as well as optimisation of fuel efficiency leading to decreased fuel consumption.

Two scenarios were modelled based on the market data: a Business As Usual (BAU) scenario and an Optimised Implementation (OI) scenario. The BAU scenario represents the tyre label as it is now with no further changes and is based on linear extrapolation of the development of the three label parameters in the period from 2013-2015. The OI scenario represents a faster market penetration of high performing tyres, achieved through actions taken to increase awareness and market surveillance efforts. With the BAU scenario, total CO2 emission savings of 5.4 Mton is expected compared to 18.2 Mton with the OI scenario.

Until now, the Tyre Labelling Scheme has only utilised a minor part of the fuel saving potential, because only few tyres are labelled in the best fuel efficiency classes. The extent of future savings depends on how effectively the labelling scheme is implemented and enforced as well as manufacturers' and consumers' responses to the scheme.

Survey of consumer awareness

Surveys were prepared and executed, as described in **Chapter 2 Surveys and interviews**, to assess the tyre buying behaviour of the end-users, the end-user awareness of the Tyre Labelling Scheme, and the need for further information on the label. Focus was put on a large C1 end-user survey with 6,000 private car owners in six EU countries¹², since the label is applicable only to C1 and C2 tyres, and the C1 market is by far the largest. The C1 end-user survey was supported by information received from C2 and C3 end-users as well as tyre suppliers and distributors.

The C1 end-user survey showed that around half of the private car owners in the surveyed countries are aware of the tyre label, and that most (64 %) have medium confidence in the labelling scheme. End-users answered that especially more market surveillance, including testing, is necessary to increase their confidence in the label.

The survey showed that when purchasing tyres, C1 end-users find wet grip the most important of the labelling parameters (62 % rated it "very important") followed by fuel efficiency (34 % rated it "very important") and lastly external rolling noise (21 % rated it "very important"). Regarding the need for further information on the label, 49 % found it "very important" to include snow and ice grip information, while 25 % found it "very important" to include mileage information.

Regarding their last purchase of tyres, 85 % of the C1 end-users purchased tyres in a physical shop, while 12 % purchased them through the internet, with 56 % planning to buy tyres on

¹⁰ Tyres online and Energy GmbH, database extractions from year 2012-2015, Hämmerling Group, Germany. Dataset covering 2012-2015 with 30,000 tyres total.

¹¹ Dutch Tyre and Wheel Trade Association, database extract from year 2013-2015, VACO, Netherlands. Dataset covering top seven brands from 2013-2015, 2,500 tyre models total.

¹² 1000 car owners from each of the countries: Italy, Sweden, France, UK, Finland, Germany.

the internet in the future. Only 36 % of those buying tyres in a physical shop saw the tyres displayed before the purchase. Industry and market surveillance authorities agreed with these findings. The assessment of whether the provisions in article 4(1)(b) of the Regulation are as effective as article 4(1)(a) is therefore obviated by the fact that end-users do not see the tyres. More focus should instead be on how to ensure proper provision of information to end-users prior to their purchase of new tyres.

Based on the findings in the surveys, the following is proposed in order to make it more likely that the consumers see the label or are informed about fuel efficiency class, wet grip class etc. before the purchase of new tyres:

- Online labelling. The label should be shown on the screen when tyres are offered for sale online (in web shops, etc.) as is already implemented for energy related products labelled under the Energy Labelling Directive (2010/30/EU)¹³.
- Obligation of the distributor to show the label of all tyres suggested to the end-users during a tyre purchasing process.
- Inclusion of information about the label performance parameters in advertisements, including the now omitted advertisements in billboards, newspapers, and magazines.
- Labelling of tyres when placed in the stock of distributors, preferably obliging labelling of all tyres. This would also make market surveillance easier to perform.

Furthermore, it is recommended to conduct awareness campaigns to increase end-user knowledge of the labelling scheme. Especially C1 end-users are important to target, since C1 tyres constitute the largest share of the tyre sales. The campaigns could be run at national level by Member State Authorities, at EU level by the Commission or both. It is suggested that tyre suppliers and/or distributors are involved in the campaigns and that experiences from previous campaigns performed by Members States and others are taken into account.

Information from vehicle suppliers and distributors

The information on tyre label parameters provided by the vehicle suppliers and distributors to end-users was specifically assessed. According to The Tyre Labelling Regulation, vehicle suppliers and distributors are obliged to provide end-users with information on tyre labelling parameters, if the end-users are offered a choice between different tyres to be fitted on the vehicle they are intending to acquire.

In the review study, it was found that most end-users are not offered a choice between different tyres when purchasing a vehicle, which was confirmed by both vehicle suppliers and distributors. According to market surveillance authorities (MSAs), market surveillance on this provision is complicated due to a lacking definition of when there is a choice, especially if the purchase of an extra set of tyres for the vehicle is considered a choice.

Based on the findings it is recommended to improve the regulation by obliging vehicle suppliers and distributors always to provide end-users with information on all tyres (not the label itself), including situations when the end-user is not offered a choice between different tyres to be fitted on the vehicle. This will make market surveillance less complicated, and will present end-users with knowledge of the tyre label.

Extensions of the labelling scheme

The possibilities to extend the labelling scheme to include additional types of tyres and new performance parameters were assessed. The extension assessments included two tyre types;

¹³ Directive 2010/30/EU of the European Parliament and of the Council

studded tyres and retreaded C3 tyres, and three performance parameters; ice/snow grip, mileage and abrasion. The assessments include collection of market data, analysis of the technical progress and possibilities, analysis of environmental impact (based on scenarios) and development of policy recommendations.

As of today, there are several marketing terms to define tyres performing well in wintry conditions (e.g. "winter tyres", "Nordic winter tyres", "all season tyres") for which no legal definition exist. However, UNECE Regulation 117 legally defines "severe snow tyres", which are tyres that based on a snow grip test can be approved for bearing the 3-Peak Mountain Snow Flake (3-PMSF) symbol. Hence, inclusion of snow grip as a parameter is technically possible through this standardised 3-PMSF test. It is recommended to include the 3-PMSF logo as an indicator for snow grip in the labelling scheme as additional information to the wet grip scale, on a voluntary basis, and consider making the 3-PMSF logo mandatory on the label, in case it is shown on the tyre sidewall. The test is applicable for all tyre types (C1, C2 and C3). Furthermore, it is recommended to use the upcoming "Nordic winter tyre" ice grip test and logo as additional information on ice grip performance for C1 tyres. The inclusion of the performance parameters should be assessed in terms of user understanding, to avoid providing information that might mislead end-users.

The assessment the inclusion of mileage as a parameter showed that external factors and use conditions affect tyre mileage significantly, limiting the effect of technological development. In addition, the only known test method (for C1 tyres only), which is currently only applicable in the USA, gives uncertain and non-reproducible results. The same applies to particle emissions from tyre abrasion, which is affected largely by external parameters, and no standard method for measuring the effects currently exists. It is therefore not recommended to include any of these parameters in the Tyre Labelling Regulation.

The assessment of the inclusion of retreaded tyres concerns only C3 retreaded tyres, since the market share of C1 and C2 retreaded tyres are below 2 %, while that of C3 retreaded tyres is around 45 %¹⁴. The main barrier of inclusion is the testing, since retreaded tyres are often produced in small series, and each new combination of carcass, tread and retreading technology gives different tyre characteristics. A tool has been developed in the ReTyre Project¹⁵ for calculating rather than testing the performance of retreaded C3 tyres. There are opposing opinions in the industry of the applicability and accuracy of the ReTyre tool for labelling purposes. It is therefore recommended not to include retreaded C3 tyres in the Labelling Regulation before technical issues with the ReTyre tool as well as questions about maintenance and availability of the tool for all retreading facilities are solved.

The assessment of studded tyres shows that the market share is very low in all but the three Nordic countries (Sweden, Norway and Finland), and the potential fuel saving is therefore very limited. One reason for the low market share is that use of studded tyres is prohibited in many European countries. Furthermore, the current test standards cannot be used for testing studded tyres, and it is therefore not recommended to include them in The Tyre Labelling Regulation.

Market surveillance in MS

To ensure compliance with the provisions in the Tyre Labelling Regulation by suppliers and distributors, Members States are responsible for conducting market surveillance and regular controls in line with the Market Surveillance Regulation¹⁶. Due to the lack of a comprehensive

¹⁴ Ruud Spuijbroek, Secretary at Bipaver (2015), personal communication on email September 16th 2015.

¹⁵ Retyre (2014), Main website. Link: <http://www.retyre-project.eu/>

¹⁶ Regulation (EC) No 765/2008 of the European Parliament and of the Council

overview of market surveillance activities in EU Member States regarding the Tyre Labelling Regulation, such an overview was sought established in the review study. Interviews were conducted with MSAs in various Member States. The investigation showed that the market surveillance effort varies greatly throughout the EU, and in general, the only widespread activity is shop inspections. Technical documentation is rarely requested for market surveillance purpose and there is a severe lack of market surveillance testing due to a lack of resources and limited number of testing facilities. Furthermore, the few Member States who conducted tests, found that the repeatability/reproducibility of the test results was very low.

The low market surveillance decreases end-user confidence in the tyre label, and tyre dealers report that due to lack of market surveillance inspections, they have decreased their efforts to educate their employees in informing end-users of the labelling scheme. To reinforce market surveillance and improve enforcement of the Regulation, it is therefore suggested to:

- Solve existing problems with high variety of test conditions and start working on improving the wet grip test method.
- Increase the visibility of market surveillance activities carried out by Member States. MSAs should be obliged to publish results of inspections (i.e. number of shop inspections and test, and compliance levels) and make them available to industry and dealers, for instance in the proposed registration database or the Tyres ADCO website¹⁷.
- Not extend the labelling scheme to cover mileage or abrasion because this will significantly increase the costs for market surveillance. Extra cost will reduce the number of inspections, and fewer inspections could easily hamper the consumers', dealers' and industry's confidence in the label scheme.
- Perform more joint actions testing in line with the upcoming joint action on labelling tyre testing funded under the EU Horizon 2020 Research and Innovation programme.
- Establish a digital registration database, where all tyres should be registered prior to being placed on the European market. The database should be separated into a publically available section and a section only available to market surveillance authorities.

¹⁷ European Commission (2015), Tyres ADCO website:
<http://ec.europa.eu/transparency/regexpert/index.cfm?do=groupDetail.groupDetail&groupID=2808&Lang=EN>

Table of Contents

Table of Contents	9
List of Appendices	12
Introduction	13
Purpose of the study	14
Study approach	15
1 Existing legislation	16
1.1 Scope	16
1.2 Classification and performance measures	16
1.2.1 Fuel efficiency class	17
1.2.2 Wet grip class	18
1.2.3 External rolling noise class and measured value	19
1.3 Test standards	20
1.4 Responsibilities	20
1.4.1 Tyre suppliers and distributors	20
1.4.2 Vehicle suppliers and distributors	21
1.4.3 Member States	21
2 Surveys and interviews	22
2.1 Selection of target groups	22
2.1.1 Tyre suppliers (manufacturers and importers)	23
2.1.2 Tyre dealers	23
2.1.3 Vehicle suppliers and distributors	23
2.1.4 C1 end-users	24
2.1.5 C2 end-users	25
2.1.6 C3 end-users	25
2.2 Results of surveys and interviews	25
2.2.1 Tyre suppliers	25
2.2.2 Tyre dealers	26
2.2.3 Vehicle suppliers and distributors	26
2.2.4 C1 end-users	27
2.2.5 C2 end-users	32
2.2.6 C3 end-users	33
3. Market transformation achieved with existing legislation	34
3.1 Data	34
3.2 Market transformation on fuel efficiency (Rolling Resistance)	34
3.3 Market transformation on wet grip	36
3.4 Market transformation on external rolling noise	37

4. Market development potentials.....	39
4.1 Modelling.....	39
4.2 Rolling resistance development.....	40
4.2.1 Energy savings	42
4.3 Wet grip development	43
4.4 External rolling noise development.....	45
4.5 Summary of market development potentials	46
5. Inclusion of new performance parameters	47
5.1 Ice and snow grip	47
5.1.1 Definitions of Snow tyres and marketing terms	47
5.1.3 Including snow and ice grip in the labelling scheme	49
5.2 Mileage.....	52
5.2.1 Factors affecting mileage	52
5.2.2 Test standards for mileage	53
5.2.3 Scenarios for increased mileage	54
5.2.4 Results of increased mileage scenarios	56
5.2.5 Conclusions on mileage.....	58
5.3 Abrasion	58
5.3.1 Abrasion and particle emissions	58
5.3.2 Test standard for particle emissions	59
5.3.3 Environmental impact of Abrasion	60
5.3.4 Conclusions on Abrasion	60
6. Inclusion of new tyre types	61
6.1 Retreaded tyres.....	61
6.1.1 Retreading process.....	61
6.1.2 Test standards for retreaded C3 tyres.....	62
6.1.3 Scenarios for including retreaded C3 tyres	64
6.1.4 Results of retreaded C3 inclusion	64
6.1.5 Current savings from retreaded tyres	66
6.1.6 Conclusions on retreaded C3 tyres	66
6.2 Studded tyres.....	67
6.2.1 Testing of studded tyres	67
6.2.2 Environmental impact of studded tyres	68
6.2.3 Conclusions on studded tyres	69
7. Market surveillance	70
7.1 Market surveillance activities in Member States	70
7.2 National enforcement and sanctions	73

8 Improved Regulation and implementation	74
8.1 Improved pre-sale information	74
8.1.1 Vehicle suppliers and distributors	75
8.2 Registration database	76
8.3 Improved market surveillance and awareness raising	77
8.3.1 Awareness and label confidence	78
8.4 Improvement of test standards and conditions	79
8.4.1 Wet grip test standard	79
8.4.2 Rolling resistance and noise test standards.....	80
8.5 Other suggestions	80
8.5.1 Tyres for emergency vehicles	80
8.5.2 Performance as function of wear	81
9. Better Regulation.....	82
9.1 Relevance	82
9.2 Effectiveness	82
9.3 Efficiency	83
9.4 EU added value	83
9.5 Coherence	84
10. Recommendations - summary	85
10.1 Recommended parameters	85
10.2 Rejected extensions	87
11. Reference list	88
11.1 Regulations	88
11.2 Other European References	89
11.3 Data References.....	90
11.4 Industry stakeholder References	91
11.5 Other Stakeholder References	92
11.6 Literature References	92
11.7 Personal Communication References.....	93
11.8 Other References	94

List of Appendices

Appendix 1 – Results from consumer survey	83
Appendix 2 – Calculations of EPEC market data	119
Appendix 3 – Stock model and calculations	124
Appendix 4 – Summary of data from TOL and VACO databases	126
Appendix 5 – Rolling resistance development	128
Appendix 6 – Wet grip development	131
Appendix 7 – External rolling noise development	133
Appendix 8 – Letter to the European Commission regarding abrasion and particles from tyres	141

Introduction

The review study focuses on the European Parliament and Council Regulation (EC) No 1222/2009¹⁸ of 25 November 2009 on the labelling of tyres with respect to fuel efficiency and other essential parameters¹⁹ (from here on 'The Tyre Labelling Regulation'). The study began in May 2015 and the project website www.labellingtyres.eu was launched in June 2015. This website was the main information exchange platform between the study-team, the Commission and the stakeholders, giving all interested parties the opportunity to provide input to this study thereby creating a fully transparent and open process.

The Tyre Labelling Regulation was adapted by the European Parliament and the Council in 2009, at the same time as the Regulation of type-approval requirements for the general safety of motor vehicles²⁰ (From here on 'The Type Approval Regulation'). Both regulations were adapted to promote sustainable mobility in the light of the climate change challenges and the need to support European competitiveness. It was found that tyres of cars and trucks accounts for up to 20 % to 30 % of the fuel consumption because of their rolling resistance²¹, and therefore represent a potential for reducing CO₂ emissions by reducing the rolling resistance. Tyres are characterised, however, by a number of interrelated parameters, and by improving one parameter, such as rolling resistance, it can have an adverse impact on other parameters, such as wet grip, thereby decreasing road safety. Furthermore, the improvement of wet grip might have an adverse impact on external rolling noise, increasing noise pollution.

The Type Approval Regulation was adapted to set out minimum requirements for the rolling resistance, external rolling noise and wet grip performance of tyres, to remove the worst performing tyres from the market. The minimum requirements in the Type Approval Regulation is based on the minimum requirements set out by UNECE Regulation 117²². For all three parameters technological development make it possible to optimise them significantly beyond the minimum requirements²³. Therefore, the Tyre Labelling Regulation was adapted to encourage end-users to purchase more fuel-efficient tyres with low external rolling noise and high wet grip performance. The tyre labelling provides harmonised information about fuel-efficiency, wet grip and external rolling noise, enabling consumers to choose among the best tyres on the market. It was anticipated in the Regulation that demand for safer, quieter and more fuel-efficient tyres, would in turn encourage tyre manufacturers to optimise those parameters to pave the way for more sustainable mobility.

Fuel efficiency continues to be highly relevant, with the EU facing scarcity of resources and dependence on energy imports as well as the need to limit climate change. With the transport sector constituting one third²⁴ of the European energy consumption, increasing fuel efficiency of road transport plays an important role in addressing these challenges. Tyres account for 20-30 % of the vehicle fuel consumption, due to their rolling resistance. Decreasing rolling resistance is therefore important to increase fuel efficiency and decrease greenhouse gas emissions. A theoretical estimate of using only fuel efficiency class A tyres in the EU shows potential reductions in CO₂ emission of 42 Mton per year, and corresponding savings of 13

¹⁸ Regulation (EC) No 1222/2009 Of The European Parliament And Of The Council

¹⁹ The assignment was informed by the European Commission as a Request for Services under the Framework Contract No. ENER/C3/2012-418-Lot2

²⁰ Regulation (EC) No 661/2009 Of The European Parliament And Of The Council

²¹ Regulation (EC) No 1222/2009 Of The European Parliament And Of The Council

²² UNECE (2014), Addendum 116: Regulation No. 117, Revision 3:

<https://www.unece.org/fileadmin/DAM/trans/main/wp29/wp29regs/updates/R117r3e.pdf>

²³ Regulation (EC) No 1222/2009 Of The European Parliament And Of The Council

²⁴ European Commission (2014), "EU Energy in Figures statistical pocketbook 2014". Link:

http://ec.europa.eu/energy/sites/ener/files/documents/2014_pocketbook.pdf

billion euros²⁵. The same calculation shows that using only tyres with the best external rolling noise class in the EU could reduce the number of annoyed and sleep disturbed people as well, resulting in potential cost savings of up to 11 billion euros.

Tyres are an important part of road safety, being the only interaction between the vehicle and the road. The tyre safety parameter used on the tyre label is wet grip. Improved wet grip performance of tyres will result in fewer accidents and will reduce the number of killed and injured people. It is estimated that using only wet grip class 'A' tyres in the EU could potentially reduce the number of people killed and injured in traffic accidents comparable to a saving of up to 10 billion euros²⁶. However, wet grip rating does not indicate how suitable a tyre is for use in wintry conditions²⁷. Hence, there is a risk that end-users are misled by the label information, if the wet grip information affects their purchase of tyres for use in wintry conditions²⁸. There is currently no information on snow or ice grip in the tyre labelling scheme.

Purpose of the study

The aim of the review study is to investigate the needs and possibilities for revision of the Regulation. This was achieved for example by assessing the efficiency of the regulation in terms of end-user awareness and achieved levels of market transformation, as well as possibilities to include new parameters and tyre types in the Regulation. Furthermore, the clarity of the Regulation was analysed, including identification of grey areas, and an overview was established of market surveillance activity in Member States.

The effectiveness of the Regulation depends i.a. on end-user awareness and understanding of the label and the provision of pre-sale information on the performance parameters included in the labelling scheme. The response of manufacturers is equally as important as the response of the end-users, since the labelling scheme places no obligation on manufacturers to improve the performance parameters. In addition, the response of distributors and dealers is very important, because they are the ones responsible for providing the label information to the end-users.

The review study on the labelling of tyres includes an online consumer survey conducted among 18-70-year-old car owners in various Member States (in total 6051 respondents). Furthermore, surveys and interviews have targeted different actors in the tyre supply chain and market surveillance authorities on order to assess the effectiveness of the labelling scheme in general, the level of enforcement and the possibilities to improve the clarity of the regulation.

²⁵ TNO, Memorandum to Ministry of Infrastructure and Environment, "Potential benefits of Triple-A tyres in the EU", Link: <http://www.unece.org/fileadmin/DAM/trans/doc/2014/wp29grb/GRB-60-13e.pdf>

²⁶ TNO, Memorandum to Ministry of Infrastructure and Environment, "Potential benefits of Triple-A tyres in the EU"

²⁷ Jarmo Sunnari Manager in Nokian Tyres (2015), presentation: "Consumer information on tyre wet grip vs. Ice grip – implications in road safety in Nordic winter", November 2015.

²⁸ VTT (2013) "Technology 133: Comprehension of grip labels on unstudded winter tyres and tyre selection". Link: <http://www.vtt.fi/inf/pdf/technology/2013/T133.pdf>

Study approach

The findings of the study are presented in the chapters of the review study report as follows:

In the first chapter, the existing legislation Regulation (EC) No 1222/2009 including its amendments is described, focusing especially on the tyre performance parameters included and the responsibilities described in the Regulation.

In the second chapter, the survey and interview methodologies are explained, including target group selection and an overview of the results.

In the third chapter, the focus is on the market transformation effects of the Regulation. The market transformation is assessed, by comparing market data of the three labelling performance parameters (rolling resistance, wet grip and external rolling noise) from before and after implementation of the regulation.

In chapter four, the future market development potentials are modelled based on the market transformation assessed in chapter three. A Business as Usual (BAU) and an Optimised Implementation (OI) scenario are established and compared to the developments anticipated in the original impact assessment on which the regulation is based.

In chapter five, the possibilities for extending the labelling scheme with new performance parameters are assessed. The performance parameters in question are snow/ice grip, mileage, and abrasion. The technical background and possible test methods for the suggested extensions are explained.

In chapter six, the inclusion of now omitted tyre types are considered. The assessments cover studded tyres and retreaded C3 tyres. The technical background and possible test methods for these tyre types are explained.

In chapter seven, an overview of market surveillance activities in the Member States is established.

Chapter eight deals with recommendations for improving the efficiency and clarity of the regulation as well as the market surveillance and enforcement.

Chapter nine, puts the Tyre Labelling Regulation into perspective of the Better Regulation Framework²⁹, commenting on the relevance, effectiveness, efficiency, EU added value and coherence.

Chapter ten, summarises the policy recommendations based in the findings of the entire study.

²⁹ European Commission (2015), Commission Decision of 16.12.2015 "Appointment of Members of the Stakeholder group of the REFIT Platform". Link: http://ec.europa.eu/smart-regulation/better_regulation/documents/c_2015_9063_en.pdf

1 Existing legislation

This chapter introduces the existing Regulation (EC) 1222/2009, explaining the background, product scope, tyre classifications and performance measures, as well as responsibilities and market surveillance practices prescribed by the regulation.

1.1 Scope

According to article 2 of the Tyre Labelling Regulation, the scope relates to C1, C2 and C3 tyres, which are the tyre types defined in article 8 of the Type Approval Regulation. The definition of the tyre types is based on the vehicles they are primarily designed for, including the weight and passenger capacity, and on the tyre load and speed indexes of the tyres, as seen in Table 1. The number of seats and vehicle weight relates to the maximum value for the vehicle category each tyre type is designed primarily for. The load capacity index and speed category symbols relate directly to the tyres.

Table 1: Definition of tyre types included in Regulation (EC) 1222/2009, based on Regulation (EC) 661/2009.

Tyre type	Designed primarily for vehicle categories	Seats in addition to driver's seat (based on vehicle category)	Vehicle weight (based on vehicle category)	Load capacity index	Speed category symbol
C1 tyres	M ₁ , N ₁ , O ₁ and O ₂	≤8	≤3.5 t	Not applicable	Not applicable
C2 tyres	M ₂ , M ₃ , N, O ₃ and O ₄	≥8	≥3.5 t	≤121	≥N
C3 tyres	M ₂ , M ₃ , N, O ₃ and O ₄	≥8	≥3.5 t	≤121	≤M
				≥122	none

C1 tyres can generally be said to be tyres for passenger cars, C2 tyres for light commercial vehicles (LCVs) and C3 tyres for heavy commercial vehicles (HCV's)³⁰.

If a tyre can be classified as two different types (e.g. C1 and C2), it is labelled based on the type with the highest demands for performance classification (i.e. C2 in this case).

The Regulation does not apply to:

- Re-treaded tyres
- Off-road professional tyres
- Tyres designed to be fitted only on vehicles registered first time before October 1990
- T-type temporary use spare tyres
- Tyres whose speed rating is less than 80 km/h
- Tyres whose nominal rim diameter does not exceed 254 mm or is 635 mm or more
- Tyres fitted with additional devices to improve traction properties, such as studded tyres
- Tyres designed only to be fitted in vehicles intended exclusively for racing

1.2 Classification and performance measures

In the current labelling Regulation, three tyre performance parameters are included: Fuel efficiency, wet grip, and external rolling noise class and measured value (in dB). The three performance parameters are specified in the Tyre Labelling Regulation, and are shown on the tyre label for C1 and C2 tyres, (see Figure 1). The label is restricted in design by Annex II of the regulation. For C3 tyres the label itself is not used, but information of the three performance parameters must be provided in technical promotional material.

³⁰ European Commission (2014), "Frequently Asked Questions (Version 25/11/2014) for Regulation (EC) No 1222/2009 of the European Parliament and of the Council. Link: http://ec.europa.eu/energy/sites/ener/files/documents/faq_-_tyre_labelling.pdf

Some of the classes defined in the Tyre Labelling Regulation are today, or will later be, empty, because they are below the minimum requirements set out in the Type Approval Regulation. The Type Approval Regulation implement rolling resistance minimum requirements in two stages, the first in November 2012 and the second in November 2016.

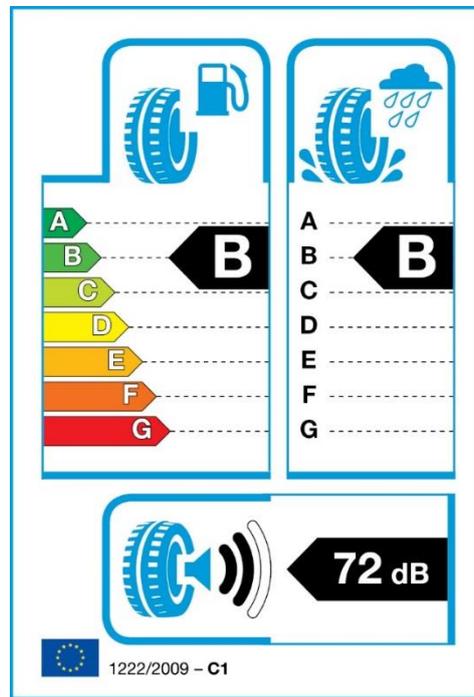


Figure 1: The tyre label for a tyre with fuel efficiency class B, wet grip class B, and external rolling noise of 72 dB (equivalent to two "soundwaves" on the scale)

1.2.1 Fuel efficiency class

The fuel efficiency of tyres is defined in terms of the *Rolling Resistance Coefficient*, RRC, given as kg resistance per ton of vehicle (kg/t) (the lower the value for RRC, the better the fuel efficiency of the tyre). For each tyre type (C1, C2, C3), the energy labelling scale A-G refers to different intervals of RRC, as seen in Table 2. The fuel efficiency index is shown on the label as a marked letter on a coloured A-G scale, as shown in Figure 1.

Table 2: RRC limit values for energy efficiency classes of the three tyre types C1, C2 and C3.

C1 tyres		C2 tyres		C3 tyres	
RRC in kg/t	Energy efficiency class	RRC in kg/t	Energy efficiency class	RRC in kg/t	Energy efficiency class
$RRC \leq 6,5$	A	$RRC \leq 5,5$	A	$RRC \leq 4,0$	A
$6,6 \leq RRC \leq 7,7$	B	$5,6 \leq RRC \leq 6,7$	B	$4,1 \leq RRC \leq 5,0$	B
$7,8 \leq RRC \leq 9,0$	C	$6,8 \leq RRC \leq 8,0$	C	$5,1 \leq RRC \leq 6,0$	C
Empty	D	Empty	D	$6,1 \leq RRC \leq 7,0$	D
$9,1 \leq RRC \leq 10,5$	E	$8,1 \leq RRC \leq 9,2$	E	$7,1 \leq RRC \leq 8,0$	E
$10,6 \leq RRC \leq 12,0$	F	$9,3 \leq RRC \leq 10,5$	F	$RRC \geq 8,1$	F
$RRC \geq 12,1$	G	$RRC \geq 10,6$	G	Empty	G

The minimum requirements for rolling resistance defined in the Type Approval Regulation are show in Table 3. The limits are applicable for tyres produced after the implementation date.

The limits are given for normal tyres. For snow tyres the limits are increased by 1 kg/ton³¹. The minimum requirements implemented in stage 1 phase out C1 and C2 tyres in fuel efficiency class G and C3 tyres in fuel efficiency class F (G already empty). Stage 2 of the implementation will phase out C1 and C2 tyres in fuel efficiency class F, and C3 tyres in class E (plus half of class D). Hence only five fuel efficiency classes (A-E) will be available for C1 and C2 tyres, and only four for C3 tyres (A-D) from November 2016.

Table 3: Rolling resistance requirements (fuel efficiency). For snow tyres the limits should be increased by 1 kg/ton

	Stage 1: November 2012		Stage 2: November 2016	
	Limit value	Implementation	Limit value	Implementation
C1 tyres	12	November 2014	10,5	November 2018
C2 tyres	10,5	November 2014	9	November 2018
C3 tyres	8	November 2016	6,5	November 2020

1.2.2 Wet grip class

Wet grip refers to the safety performance of tyres, i.e. it reflects the capacity of a tyre to brake on a wet road. The wet grip is applicable to all tyre types (C1, C2, C3), and is determined based on the wet grip index (G) according to the A-G scale specified in Table 4. The value of the wet grip index should be calculated based on either the average deceleration in m/s² or the peak brake force coefficient, which is unit-less, and compared to a Standard Reference Test Tyre (SRTT). The wet grip index is shown on the label as a marked letter on the A-G scale, as shown in Figure 1.

Table 4: G limit values for wet grip scales of the three tyre types C1, C2 and C3

C1 tyres		C2 tyres		C3 tyres	
G	Wet grip class	G	Wet grip class	G	Wet grip class
1,55 ≤ G	A	1,40 ≤ G	A	1,25 ≤ G	A
1,40 ≤ G ≤ 1,54	B	1,25 ≤ G ≤ 1,39	B	1,10 ≤ G ≤ 1,24	B
1,25 ≤ G ≤ 1,39	C	1,10 ≤ G ≤ 1,24	C	0,95 ≤ G ≤ 1,09	C
Empty	D	Empty	D	0,8 ≤ G ≤ 0,94	D
1,10 ≤ G ≤ 1,24	E	0,95 ≤ G ≤ 1,09	E	0,65 ≤ G ≤ 0,79	E
G ≤ 1,09	F	G ≤ 0,94	F	G ≤ 0,64	F
Empty	G	Empty	G	Empty	G

Regulation 661/2009 sets out minimum wet grip requirements for C1 tyres only. For normal tyres the limit value is ≥1.1. For snow tyres (designed to perform better in snow conditions) the requirement is ≥1.0 if the maximum permissible speed is >160 km/h and ≥0.9 if the maximum permissible speed is <160 km/h. No future changes of wet grip minimum requirements are implemented in the Regulation. For C1 tyres the minimum requirements has phased out tyres in wet grip class F. The remaining classes on the label are A-E.

³¹ Regulation (EC) No 661/2009 of the European Parliament and of the Council

1.2.3 External rolling noise class and measured value

The external rolling noise refers to the noise of the tyres experienced outside the car and hence not by the driver or passengers. The external rolling noise (N) is measured as dB, and the external rolling noise class is depicted on the label as a marking of 1 to 3 black “sound waves” according to the scale shown in Table 5 and Figure 1. The limit values (LV) which determines the external noise class of tyres are determined in Part C of Annex II of Regulation (EC) No 661/2009, and the absolute values vary between C1, C2 and C3 tyres.

Table 5: N limit values for the external rolling noise class for all three tyre types (C1, C2 and C3)

External rolling noise (N)	External rolling noise class
N is 3 dB lower than limits in 661/2009 ³² ($N \leq LV - 3$)	1 Sound Wave
N meets 661/2009 limits ($LV - 3 < N \leq LV$)	2 Sound Waves
N exceeds 661/2009 limits ($N > LV$)	3 Sound Waves

The limit values are given in the Type Approval Regulation as shown in Table 6. For C1 snow tyres, extra load tyres or reinforced tyres (Carcass designed to carry extra load than standard tyre³³), the limits are increased by 1 dB(A). For C2 and C3 special use tyres, the limits are increased by 2 dB(A). For C2 traction snow tyres an additional 2 dB(A) are allowed. For all other C2 and C3 snow tyres an additional 1 dB(A) are allowed.

Table 6: External rolling noise limit values according to Regulation 661/2009

C1 tyres		C2 tyres		C3 tyres	
Nominal tyre section width (mm)	Limit values in dB(A)	Category of use	Limit values in dB(A)	Category of use	Limit values in dB(A)
≤185	70	Normal tyres	72	Normal tyres	73
>185 ≤ 215	71	Traction tyres	73	Traction tyres	75
>215 ≤ 245	71				
>245 ≤ 275	72				
>275	74				

³² Regulation (EC) No 661/2009 of the European Parliament and of the Council

³³ Regulation (EC) No 661/2009 of the European Parliament and of the Council

1.3 Test standards

This section provides an overview of the test standards at EU and Member State level for the tyre performance parameters referred to in the existing legislation regarding tyre labelling. An overview of the test standards, referred to in the Tyre Labelling Regulation, is shown in Table 7.

Table 7: Overview of test standards used in Regulation 1222/2009 and Regulation 661/2009

Performance parameter	Test method concept	Type approval 661/2009			Labelling 1222/2009		
		C1	C2	C3	C1	C2	C3
Rolling Resistance	Indoor: Machine test	UNECE R117.02 ISO 28580:2009 w/o §10			UNECE R117.02 + EC Alignment procedure		
Wet grip	Outdoor: Wet braking vs. reference tyre	UNECE R117.02/ reg. 661/2009/ Dir. 2001/43/EC	UNECE R117.02/ reg. 661/2009/		Reg. 1222/2009 Annex V	ISO 15222:2011	
External noise	Outdoor: pass-by test	UNECE R117.02 an limit values from Reg. 661/2009					

The Rolling Resistance Coefficient is determined by a test performed in accordance with Annex 6 of UNECE Regulation No 117 (referring to ISO 28580 standard), which is applicable for C1, C2 and C3 tyres. To ensure alignment of Laboratories, a laboratory alignment procedure is described in Annex IV of Regulation 1222/2009. Noise testing for labelling as well as for type approval, must be performed in accordance with UNECE Regulation No 117.

The wet grip class is determined based on the wet grip index (G), which is defined by a „relative“ test method measuring the peak brake force coefficient (unit-less), meaning that the wet grip index is expressed as a percentage of the performance of a reference tyre, tested under the same conditions. The wet grip test method is included in the Tyre Labelling Regulation³⁴. The wet grip testing methods for C1 tyres listed and described in appendix V of the Tyre Labelling Regulation, sets out different conditions for normal and snow tyre test conditions. The wetted surface temperature and the ambient temperature shall be between 2°C and 20°C for snow tyres and between 5°C and 35°C for all other tyres. Furthermore, the reference temperatures for calculations are 10°C for snow tyres and 20°C for all other tyres. The large test condition ranges permitted in the wet grip test is an important cause for the large variations and low repeatability/reproducibility seen in wet grip test results.

1.4 Responsibilities

1.4.1 Tyre suppliers and distributors

It is the responsibility of the tyre suppliers (defined as importers and manufactures in Article 4 of the Tyre Labelling Regulation) to provide C1 and C2 tyres with the tyre label, either as a sticker on the tread or as a label in printed format to accompany each batch of one or more identical tyres. For all tyres (C1, C2, C3) the tyre suppliers must state the tyre parameters in the technical promotional material and on their website. Furthermore, they must make the technical documentation available to market surveillance authorities on request. The documentation must be sufficiently detailed to verify the accuracy of the applicable tyre performance parameters.

³⁴ Commission Regulation (EU) No 228/2011 amending Regulation (EU) No 1222/2009

The tyre distributors (defined as distributors and dealers in Article 5 of the Tyre Labelling Regulation) are responsible for ensuring that at the point of sale, C1 and C2 tyres bear the label as a sticker on the tyre thread, or that label before the sale is shown to the end-user and is clearly displayed in the immediate proximity to the tyre. For sales where tyres are not visible to the end-user, such as internet sales, the tyre distributors must provide the end-users with information on the fuel efficiency and wet grip classes and the external rolling noise class and measured value. This does not apply to advertisements. The distributors are also responsible for stating the information on the bills delivered to end-users when they purchase tyres.

1.4.2 Vehicle suppliers and distributors

In the case of tyres sold on the Original equipment market, OEM, (Article 6, Regulation 1222/2009), vehicle suppliers and distributors shall, when the end-users are offered a choice between different tyres, before the sale provide the end-users with information on the fuel efficiency and wet grip classes and the external rolling noise class and measured value for each tyre. The information shall also be included in the technical promotion material.

1.4.3 Member States

Each Member State is responsible for the enforcement of the Tyre Labelling Regulation (Article 12), and must ensure that "the authorities responsible for market surveillance" verifies compliance with article 4, 5 and 6 of the Regulation. Member States must ensure in accordance with Regulation 765/2008³⁵ that the responsible Market Surveillance Authorities (MSA's) have the necessary powers, resources and knowledge to perform their tasks. Regulation 765/2008 describes the general rules with regard to market surveillance and controls of products entering the community market.

Regulation 765/2008 includes among others an obligation on MSAs to perform appropriate checks on the characteristics of products on an adequate scale, by means of documentary checks and, where appropriate, physical and laboratory checks based on adequate samples (article 19).

It is the responsibility of the appointed Market Surveillance Authorities (MSAs) described above. This includes shop and storage inspections, to ensure that tyres are correctly labelled in accordance with the Regulation.

Article 8 of the Tyre Labelling Regulation states that "Member States shall assess the conformity" of the declared fuel efficiency and wet grip classes and external rolling noise class and measured value in accordance with the verification procedure in annex IV of the Regulation, which sets out a test procedure and sequence as well as tolerances for each performance parameter.

³⁵ Regulation (EC) No 765/2008 of the European Parliament and of the Council

2 Surveys and interviews

Surveys and interviews with different actors in the tyre supply chain were conducted as a part of the review study in order to get an overview of the label effectiveness and improvement potentials. In the first section of this chapter, the methodology applied for the surveys and interviews is explained and in the second section, an overview of the key results is presented.

2.1 Selection of target groups

An overview of the key stakeholders affecting the tyre label effectiveness is seen in Figure 2. The dotted line marks the stakeholder groups directly involved in the tyre supply chain. EU Member States and MSAs affect the effectiveness of the labelling scheme through their implementation and enforcement of Tyre Labelling Regulation. This chapter only deals with direct supply chain actors, whereas results from interviews with MSAs are described in chapter 7.

Six target groups were selected for surveys and/or interviews in order to cover the entire supply chain. These were: 1) Tyre suppliers 2) Tyre dealers 3) Vehicle suppliers and distributors 4) C1 end-users 5) C2 end-users 6) C3 end-users.

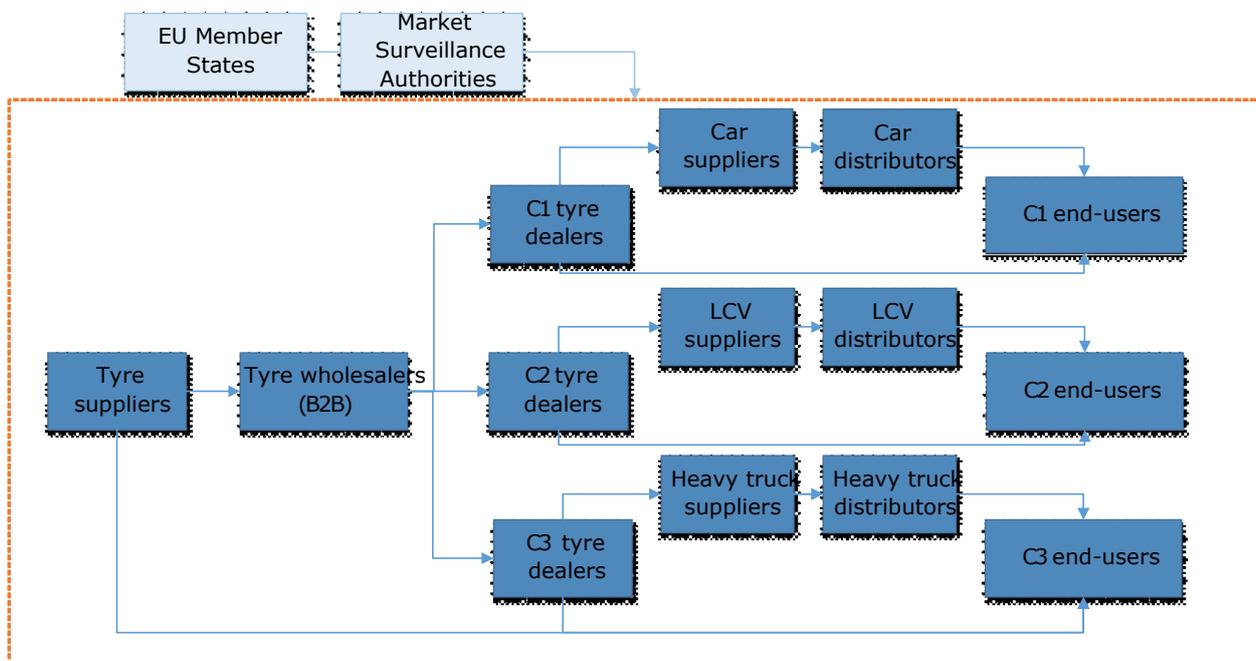


Figure 2: Overview of the stakeholder groups directly and indirectly involved in the tyre supply chain of both OEM (Original Equipment Market) and replacement tyre market.

In this context suppliers are defined as in the Tyre Labelling Regulation, Article 3; “supplier” means the manufacturer or its authorised representative in the Community or the importer”. The distributors defined in the Regulation as “any natural or legal person in the supply chain, other than the supplier or the importer, who makes the tyre available in the market”, are in this context divided into wholesalers and dealers, where wholesalers conduct B2B sales to other tyre distributors and dealers conduct sales directly to end-users. The dealers are the most relevant to this study, since they have the direct contact with end-users, and therefore are important for disseminating of the labelling information.

2.1.1 Tyre suppliers (manufacturers and importers)

On the manufacturer side, the European Tyre and Rubber Manufacturers' Association (ETRMA) was identified as the key representative accounting for 76 % of the European C1 and C2 tyre markets and 83 % of the C3 tyre market³⁶. ETRMA has 12 corporate members consisting of large tyre manufacturers, who were reached through online surveys.

On the importer side, the International Tyre Manufacturers' Association (ITMA) was identified as the key representative for non-ETRMA tyre manufacturers importing tyres to Europe³⁷. By targeting ETRMA and ITMA 90 %^{36,37} of the European tyre market is represented. Interviews were conducted with contacts from key tyre importers provided by ITMA.

2.1.2 Tyre dealers

In this study not all tyre distributors were relevant to contact regarding the dissemination of information to end-users, but only the dealers, who are in this context defined as those distributors selling directly to end-users. A large number of tyre dealers exist in the European market and in order to get as large a representation of the market as possible they were reached through tyre dealer organisations listed in Table 8. Dealers are in this study defined as those having direct contact with end-users with exception of the 'fleet solution services' used primarily for C3 tyres, where tyre suppliers manage contracts directly with fleet operators³⁸.

Table 8: European tyre dealer organisations interviewed

NTDA	National Tyre Dealers Association (UK)	200 member companies representing over 2000 retailers
VACO	Industry association for the tire and wheel industry (NL)	350 member companies representing over 730 retailers
FEDERTYRE	Association of tyre specialists of Belgium (BE)	representing companies buying, selling and servicing tyres, rims & wheels
BRV	Federal Association of tyre trade and vulcanisation craft (DE)	800 member companies representing over 3,400 retailers
DRF	Trade organisation for Swedish tyre, rim and service (SE)	860 member companies

2.1.3 Vehicle suppliers and distributors

Tyres sold on the Original Equipment Market (OEM) (i.e. with a new vehicle) constitutes 25 % of the tyre production in Europe³⁹. This part of the tyre market is small compared to the replacement market, but still considered important in terms of which tyres are used on European roads. Interviews were therefore conducted with key representatives of the vehicle suppliers and distributors, which were identified as the European Automobile Manufacturers Association (ACEA) and the European Council for Motor Trades and Repairs (CECRA). ACEA represents the 15 Europe-based car, van, truck and bus makers and has close relations with the 29 national automobile manufacturers' associations in Europe⁴⁰. CECRA brings together 24

³⁶ European Tyre and Rubber Manufacturers' Association, ETRMA (2016), "European Tyre & Rubber Industry; Statistics Edition 2015". Link: <http://www.etrma.org/uploads/documents/Statistics%20booklet%20-%20edition%202015.pdf>

³⁷ International Tyre Manufacturers' Association (2014), "Europe's Importers show the way", November 18th 2014. Link: <http://www.itma-europe.com/2014/11/europes-importers-show-the-way/>

³⁸ Information provided by ETRMA. 'Solution services' are services provided by the tyre suppliers where tyres are leased directly to fleet owners/operators charging a price per km driven.

³⁹ Braungardt et al. (2014), "Impact of Ecodesign and Energy/Tyre Labelling on R&D and Technology Innovation", Link: <http://www.ecofys.com/files/files/fraunhofer-ecofys-2014-impact-of-ecodesign-energy-labelling-on-innovation.pdf>

⁴⁰ ACEA, European Automobile Manufacturers Association, (2016), "Who we are" general website. Link: <http://www.acea.be/about-acea/who-we-are>

national professional associations representing the interests of motor trade and repair business, and 12 European Dealer Councils representing vehicle dealers⁴¹.

Tyres bought on the OEM are not the key product that is purchased, but only a minor part of the vehicle, which is the main product. However, the vehicle distributors are still in direct contact with the end-users, and therefore important for the general label awareness and understanding.

2.1.4 C1 end-users

The C1 tyre market is by far the largest in terms of tyre sales, constituting 77 % of the tyre sales in 2013⁴². C1 end-users include consumers defined as private persons buying tyres for their own private cars, as well as leasing companies buying tyres for their lease cars.

The main difference between the two segments is that private consumers hold all costs for both tyre purchase and tyre usage, and hence are affected by both the purchase price and the fuel efficiency. The leasing companies on the other hand, holds only the purchase costs, whereas the lessee holds all costs for fuel.

Consumer survey

The C1 consumer survey was carried out as an online questionnaire with user-panels of 1000 respondents in six European countries. All respondents were owners of passenger cars who were responsible for the purchase of tyres. The six countries were selected based on the number of registered cars⁴³, the access to user panels, and the presence of large tyre suppliers in the country. Furthermore, it was based on the geographical coverage, to have answers from both southern and central Europe and from Nordic countries, where the use of snow tyres is more predominant than in the rest of Europe⁴⁴. Based on these considerations, the following countries were chosen:

- Germany (~42 million cars)
- England (~29 million cars)
- France (~32 million cars)
- Italy (~37 million cars)
- Sweden (~4,5 million cars)
- Finland (~3 million cars)

The results of the C1 end-user survey was supplemented with results from a survey conducted in Poland by the Polish Tyre Industry Association (PITA) on end-user awareness⁴⁵. The main purpose of the consumer survey was to assess the effectiveness of the label in terms of consumer awareness and understanding of the label, and to assess the tyre buying behaviour of the consumers. Furthermore, the perception of the consumers of extending the labelling scheme to include mileage, performance on ice/snow conditions, and to cover retreaded tyres was captured by the survey.

⁴¹ CECRA, The European Council for Motor Trades and Repairs (2016), "About CECRA", General website. Link: <http://www.cecra.eu/page/about>

⁴² Van Holsteijn en Kemna B.V. - VHK (2014), "Ecodesign impact accounting – Part 1, Status Nov. 2013", Link: https://ec.europa.eu/energy/sites/ener/files/documents/2014_06_ecodesign_impact_accounting_part1.pdf.

⁴³ Odyssee-Mure Project (2012), "Energy Efficiency Trends in Transport in the EU" , Link: <http://www.odyssee-mure.eu/publications/efficiency-by-sector/transport/>

⁴⁴ Lennart Lomaeus, chairman of DFTF Sweden (Swedish Tyre, Rim & Accessories Suppliers Association) (2015), Presentation: "Winter tyre Market's segments evolution in the Nordic countries".

⁴⁵ Polish Tyre Industry Association, PITA, "Public opinion survey: awareness of impact of tyres on safe driving and environmental protection", Millward Brown for the Polish Tyre Industry Association, October 2013. . Link: http://ptia.org.pl/assets/files/publications/PTIA_report_en.pdf

Leasing companies

According to Lease Europe⁴⁶, the leasing companies represent around 25 % (2010⁴⁷) of the European carpark. Ten companies were identified as key players in the European car leasing market, and an attempt to establish contact for potential interviews was done. Most of the companies did not show any interest in answering questions about the EU-tyre labelling scheme. Therefore, interviews have only been made with a few leasing companies in Denmark.

The main purpose of interviewing leasing companies was to identify any significant differences in tyre purchasing behaviour and use of the tyre label compared to private consumers.

2.1.5 C2 end-users

C2 end-users are the purchasers and users of C2 tyres, used for light duty vehicles (LDV's). The C2 end-users can be individuals or companies who own or rent LDV's. The main difference is that LDV owners are affected by both the tyre purchase cost and the tyre fuel efficiency (in terms of fuel cost), whilst lessees of LDV's holds only the costs for fuel.

2.1.6 C3 end-users

The C3 end-users are primarily truck fleet owners and operators. Existing truck fleet surveys were used in this study to reach a larger amount of truck fleet operators than would otherwise have been possible. The two main studies applied were performed by M2 Conceal (on behalf of Goodyear)⁴⁸ and by Commercial Motors Trucking Britain⁴⁹. Since it was not possible within the frame of this study to make an equally thorough survey with fleet owners, results from these two surveys were used for information on C3 end-users.

2.2 Results of surveys and interviews

2.2.1 Tyre suppliers

The surveys with tyre suppliers showed that 53 % of them believe that their customers (distributors and fleet operators) are aware of the tyre label, while they believe that only 25 % understand it. Most suppliers provide the label for C1 and C2 tyres both as a sticker and a printed label (47 %), others provide it only as sticker (33 %), while 20 % did not answer the question.

Regarding customer priorities, the suppliers indicate that of the three labelling parameters they experience most focus on wet grip followed by fuel efficiency in the C1 and C2 markets. The request for information on the proposed new performance parameters are shown in Table 9.

Table 9: The request for information experienced by tyre suppliers in the market

	Tyre distributors	Fleet operators (C3)
Snow grip information	40%	13%
Mileage information	20%	40%

For retreaded C3 tyres, 60 % of the manufacturers supply them (ETRMA members), while none of the importers reported to do so (ITMA). In total 46 % of tyre suppliers think retreaded tyres should be included in the labelling scheme, 7 % do not, and 47 % do not know.

⁴⁶ Lease Europe represents about 92 % of the entire European leasing market; Link:

http://www.leaseurope.org/uploads/documents/ranking/Leaseurope%20Ranking%20Survey%202013_public.pdf

⁴⁷ Lease Europe (2011), "The European Leasing & Automotive Rental Markets – State of Play" Link:

http://www.leaseurope.org/uploads/documents/events/seminar_for_lesors/2011/Jurgita%20Bucyte_WEB.pdf

⁴⁸ MV2 Conseil on behalf of Goodyear (2013), Truck fleet survey, Link:

http://www.fleetfirst.eu/ff_home_en/news/goodyear-fleet-survey-reveals-growing-influence.jsp

⁴⁹ Commercial Motor (2013), "The Ronseat approach", October 10th 2013 pp 32-35. Link:

<http://archive.commercialmotor.com/article/10th-october-2013/32/the-ronseat-approach>

Regarding efficiency of the market surveillance, only 13 % answer that it is sufficient to some extent, as seen in Figure 3.

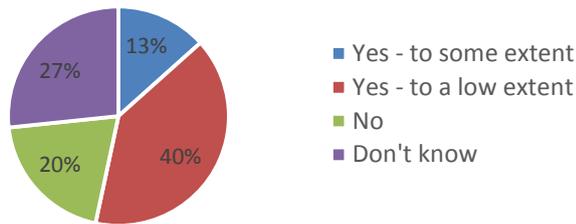


Figure 3: Tyre suppliers' response to the sufficiency of market surveillance

2.2.2 Tyre dealers

When dealer associations were interviewed, they said that all dealers know about the label, and that they have a good understanding of it, however no one of the associations could exemplify how the tyre label information was provided to end-users or to what extent. Most dealer organisations think that market surveillance is either very poor or insufficient, and agree that more frequent surveillance campaigns and tests are needed from the authorities. One of the dealer organisations mentioned that initially (when the labelling scheme was implemented) they put a lot of focus on the label and education of their members in providing the label information. However, since they found market surveillance insufficient and interpreted it as lack of interests in the label from the authorities, they did not see the point in continuing these efforts.

All tyre dealers sell the largest part of tyres with a tread sticker, and use the printed label when tyres are in storage. All deliver the label information on invoices.

The dealers do not have an overview of end-user awareness of the label, but only a few report that their customers request label information on their own initiative. According to the dealer associations, the end-users focus primarily on safety aspects, followed by price, durability and to some extent fuel efficiency. This is in accordance with the findings from the C1 end-user survey.

Most tyre dealers experienced requests on snow grip from end-users, most prevalingly in Sweden of the interviewed countries, which is as expected. Only the Swedish and German dealer associations (of the interviewed) had a clear opinion that including snow grip in the labelling scheme would be an advantage. Four of the dealer associations experienced demand for mileage information from end-users.

2.2.3 Vehicle suppliers and distributors

Contacted vehicle suppliers and distributors were well aware of the tyre label, and all answered that they pass on the label information to their customers. However, the tyre label is not one of their focus areas. Vehicle suppliers purchase tyres directly from tyre suppliers, and often the vehicle distributor (the dealer), have no influence over with which tyres the car is sold. However, end-users are often offered to purchase an additional set of tyres with the vehicle (often fitted on wheels), which is called "False OE" by some dealers, and is mostly relevant for customers purchasing a set of "winter tyres" in addition to the tyres included in the car price⁵⁰.

⁵⁰ Lennart Lomaeus, DFTF, Tyre Manufacturers Association in Sweden (2016), e-mail received march 22nd 2016, "VB: VB: tyre review study – Draft Final Report for commenting"

2.2.4 C1 end-users

Consumer survey

The entire consumer survey questions and answers are included in Appendix 1.

Label awareness and understanding

More than half of the car owners in the investigated countries were not aware of the label before they began the survey. The awareness was the highest in Germany (48 %) and Italy (45 %) and the lowest in Sweden (34 %) and Finland (36 %). A Polish survey from 2013⁵¹ showed that only 16 % of the Polish car drivers knew about the European energy labelling of tyres⁵², which indicates that the consumer awareness might be lower in other countries than the ones included in the survey.

When comparing the awareness to when the users last purchased new tyres (Figure 4), the data shows that the more recently the consumers last purchased tyres, the higher was the awareness, indicating a continuous positive progress.

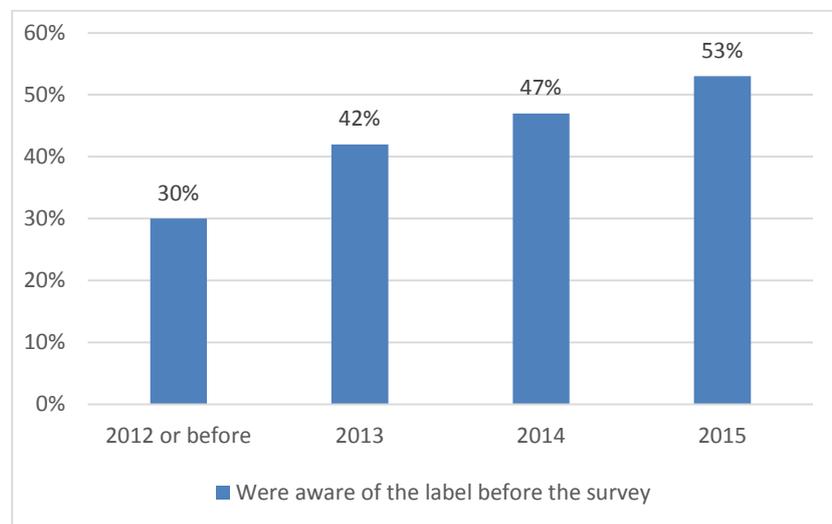


Figure 4: User awareness of the label based on the year they last purchased tyres

Danish consumer statistics for the European and Nordic Ecolabels, “The Flower” and “the Swan”, showed that 89 % of consumers recognised the Swan in 2013⁵³. This is very high compared to the tyre label, which was recognised by only 41 % when the survey was conducted, three years after the tyre label was implemented. This could have something to do with the Swan logo being used on everyday products (especially personal hygiene products), which are purchased much more often than tyres. However, the Flower (European ecolabel) was only recognised by 34 % in 2013, even though it is used on the same products as the Swan. The primary reason for this difference is that the European ecolabel logo was changed in 2010, which caused the recognition rate to drop from 60 % to 29 %.

Since the tyre logo has only been implemented since 2012, and tyres are purchased less frequently than the products labelled with the European Ecolabel, the 41 % recognition is

⁵¹ Polish Tyre Industry Association, PITA, “Public opinion survey: awareness of impact of tyres on safe driving and environmental protection”, Millward Brown for the Polish Tyre Industry Association, October 2013.

⁵² Polish Tyre Industry Association, PITA, “Public opinion survey: awareness of impact of tyres on safe driving and environmental protection”, Millward Brown for the Polish Tyre Industry Association, October 2013.

⁵³ Miljømærkning Danmark (Ecolabel Denmark), “kendskab til Mærkerne”, link: <http://www.ecolabel.dk/da/blomsten-og-svanen/kendskab-til-maerkerne>

considered as a good result so far. However, as mentioned before it could be lower in other countries than the countries included in the survey.

Understanding of the label

In general, the consumers' comprehension of the tyre label is good. When presented with the label, the consumers were able to understand the information given, even though they were not familiar with it beforehand. For each label performance parameter the consumers were asked which of six different options presented, they thought the icon indicated. The consumers were also asked if they found the information on the label easy to understand for all the three parameters fuel efficiency, wet grip and external rolling resistance. The answers for both questions are shown in Table 10.

Table 10: Share of respondents choosing the correct answer for the three label pictograms and who found the pictograms easy to understand

	Fuel efficiency	Wet grip	External rolling noise
Correct answer when presented with pictograms	71%	86%	83%
Finding the pictogram easy to understand	71%	79%	58%

From Table 10 it can be seen that the respondents understood the wet grip pictogram best, which was also the one most respondents rates as 'easy to understand'. For the noise pictogram, a large share chose the correct answer, but significantly fewer rated it as easy to understand. That might be because respondents found it easy to see that the pictogram indicated noise, but were not sure whether it was external noise (as heard outside of the vehicle) or internal noise (heard by drivers and passengers). The Dutch Tyre and wheel industry Association, VACO, mentioned that few consumers and fleet owners look specifically for tyres with lower external rolling noise and that if noise is considered at all it will be the noise inside the vehicle that is relevant to end-users.

Importance of the information on the label

The consumers were asked how important they found each of the performance parameters on the label as well as the price and the brand of the tyre. The share of the consumers who answered 'very important' or 'important' is shown in Table 11.

Table 11: Share of C1 end-users finding each parameter very important or important

Country	Parameters				
	Price	Brand	Fuel efficiency	Wet grip	External rolling noise
UK	93 %	60 %	89 %	93 %	63 %
Sweden	92 %	39 %	84 %	96 %	76 %
Italy	97 %	74 %	92 %	97 %	70 %
Germany	96 %	56 %	90 %	96 %	65 %
France	94 %	75 %	82 %	95 %	68 %
Finland	94 %	49 %	83 %	95 %	78 %
All	94 %	59 %	86 %	96 %	70 %

The most important parameters for the consumers were wet grip and price followed by fuel efficiency. Especially for wet grip a large share of the consumers answered that they found the parameter 'very important' (62 %) and to some extent the price (49 %).

The consumers were also asked which of the tyre performance parameters on the label they weighted as most important. Also in this case, the largest share found the wet grip most important (42 %). However, a relatively large share found all of the parameters equally important (37 %). Only 13 % found the fuel efficiency most important. This is in line with the results of a Dutch consumer survey performed by GfK, where wet grip was rated most important followed by fuel efficiency and lastly noise⁵⁴.

Usefulness of the label

In general, the consumers rated the label as useful (90 %), 38 % answering they found it 'very useful' and 52 % that they found it 'useful'. Only 3 % thought that the information was not useful, while the remaining 7 % answered that they did not know.


When asked whether they were missing any information on the label, 90 % answered 'no'. However, when asked if they considered it important to include additional information on the label regarding mileage and grip on snow and ice, a larger share answered that they found these parameters important, as seen in Table 12. Especially the consumers in the Nordic countries Sweden and Finland considered it very important to include information about grip on snow and ice (60 % in Sweden and 56 % in Finland). Hence, they had to be asked about specific parameters before stating that they were missing the information in the label.

Table 12: Share of C1 end-users finding it important to have mileage / snow and ice grip on the label

	Very important	Important
Mileage	25 %	53%
Grip on snow and ice	49 %	39%

Confidence in the label

A major part of the consumers have high or medium confidence in the information provided by the label as seen in Figure 5, and only 5 % have low confidence. However, the share having medium confidence was by far the largest, with Sweden as the country with the lowest share having high confidence (15 %). Limited confidence might discourage some consumers to use the tyre label actively when purchasing tyres.

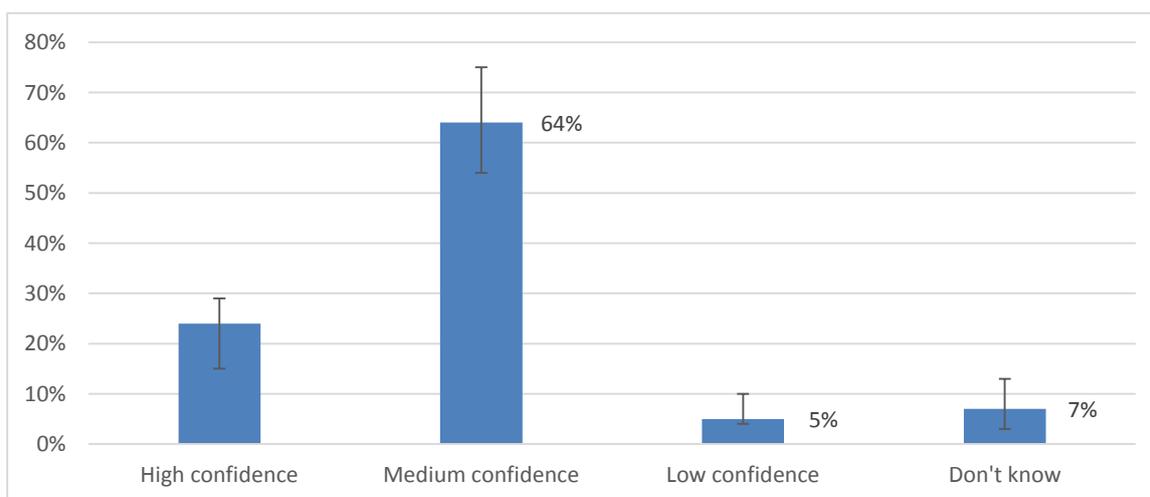

⁵⁴ GfK, Dutch consumer research with 1185 participants, summer 2014. According Pers. Comm. With Tim van der Rijken, Trade association for the tyre and wheel sector in the Netherlands, VACO (e-mail received December 23rd 2015)

Figure 5: Share of the interviewed consumers answering that they have high, medium or low confidence in the information on the label. Error bars indicating the spread between countries

In addition, the consumers were asked how their confidence could be improved and many answered that more market control and more sanctions towards non-compliance would increase their confidence, as seen in Table 13. This is in accordance with the answers from both tyre manufacturers and dealer associations, who also requested more market surveillance. In addition, many consumers request more information in the form of independent testing by consumer associations or authorities or a public database with the tyre data from the labelling scheme. Half of the consumers (51 %) answered that they would use such a database, and 37 % answered that they maybe would.

Table 13: How consumer confidence in the label could be improved

Suggestions	Share of interviewed consumers selecting the answer
Setting up a public available database with information about the parameters on the label	37 %
Opportunities for authorities to punish non-compliant manufacturers (with fines etc.)	32 %
More market control	29 %
More independent information from consumer associations, authorities etc.	38 %
Opportunities for authorities to punish non-compliant dealers that do not show the label	23 %
More test results in car magazines etc.	25 %
Other (please specify)	2 %
My confidence cannot be improved	5 %
Don't know	12 %

Tyre purchasing behaviour

When purchasing tyres, the consumer survey showed that safety is the prevailing concern among consumers, and most consumers therefore find wet grip the most important of the labelling parameters⁵⁵ (Figure 6), while also a large share find the label parameters equally important. When considering other non-labelling parameters as well, wet grip is still the most important followed by the price. Leasing companies (of C1 and C2 vehicles) are more concerned about the tyre brand and generally buy what they call 'premium brands' (the large well-established brands), due to the signal value. They are less concerned with the label parameters, but mention 'safety' in general as an important parameter.

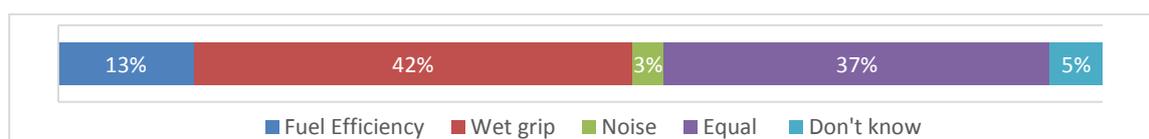


Figure 6: Share of consumers who find each label parameter most important

⁵⁵ Consumer survey with C1 end-users in selected European Countries, Viegand Maagøe, fall 2015. See Appendix 1.

The largest share of the consumers bought tyres through the traditional channels, tyre shops and car workshops the last time they purchased new tyres. However, the variation was quite large from country to country as seen in Figure 7.

The share of consumers who made their latest tyre purchase on the internet is 12 %, but this share is expected to increase. When asked for future expectations, 21 % claim that they will buy tyres on the internet in the future, and 35 % that they might do so. Thus, it becomes increasingly important to show the label and the relevant information when tyres are offered for sale on the internet.

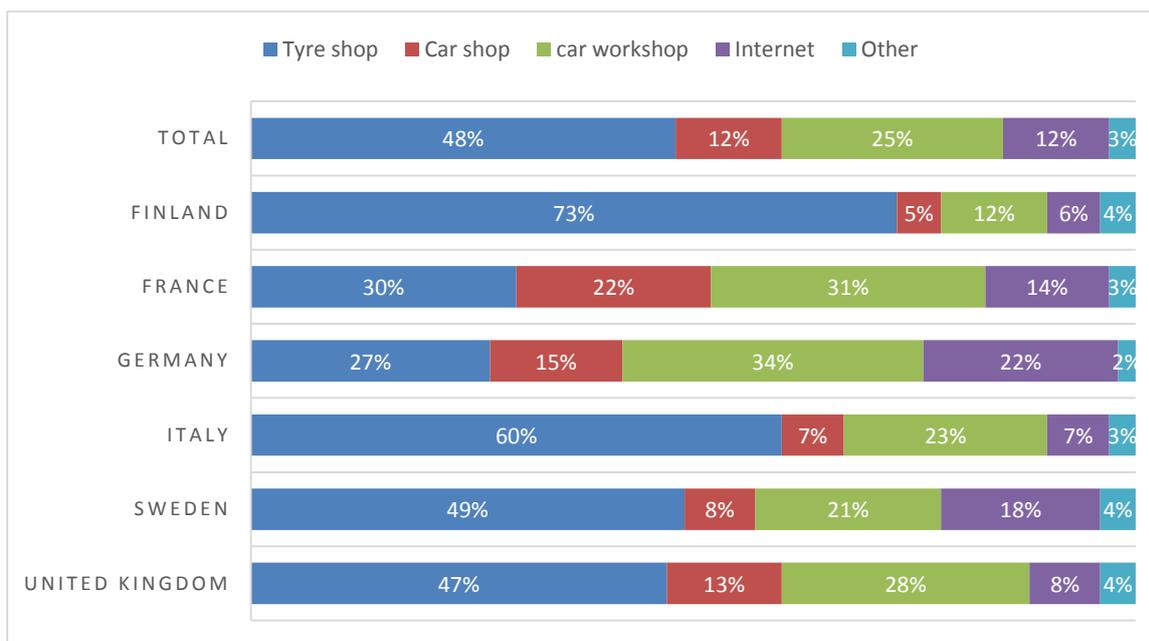


Figure 7: Where C1 users bought their last set of tyres

Of the consumers purchasing tyres in a physical shop, two thirds did not see the tyres displayed before purchasing, while one third did see them, and 5 % do not remember. The consumers who saw the tyres displayed in a shop were asked whether they noticed the label. To this question 50 % answered that they did notice the label, 30 % answered they did not notice the label, and 20 % answered that they could not remember. Of those who noticed the label, 64 % saw it placed as a sticker on the tyre tread, 30 % as a label placed near the tyre, and 8 % in a brochure or in promotional material. The remaining part could not remember where they saw the label.

When seeking additional information prior to a tyre purchase, most consumers found it at the place where they purchased tyres and on the internet, while 34% did not look for additional information at all.

Sticker or printed label

According to the Regulation, the tyre label should be placed, at the point of sale, as a sticker on the tyre tread or as a printed label near the tyres. A majority of C1 end-users preferred the label to be placed on the tyre tread (47 %), 23 % preferred the printed label, and 19 % had no preferences. A few percent had other proposals and 9 % did not know (Figure 8).

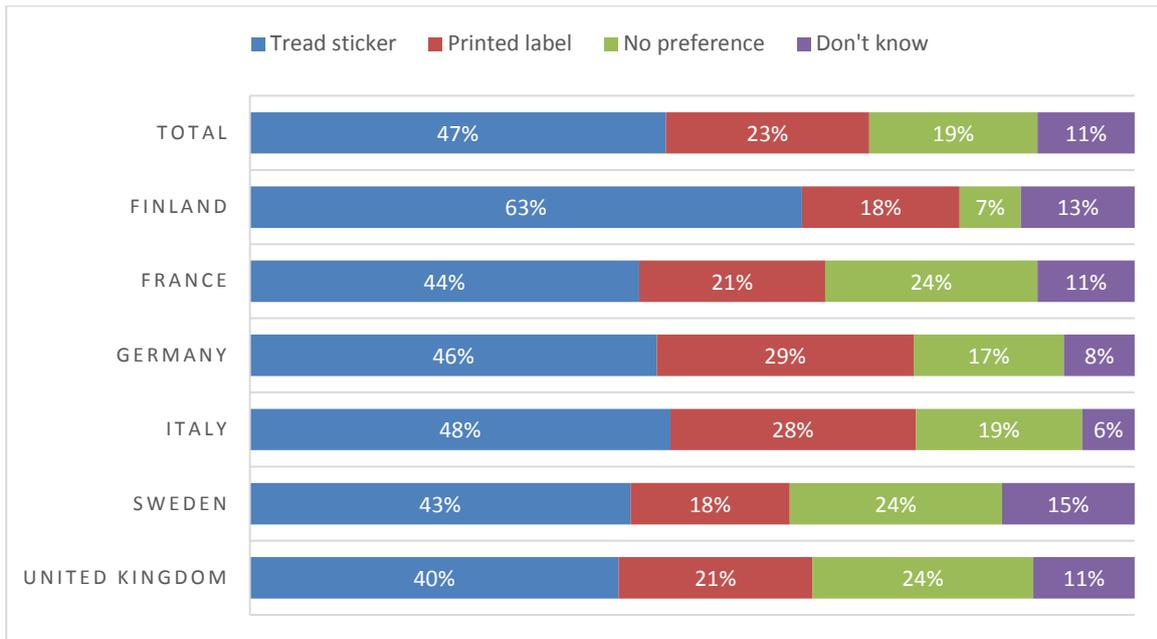


Figure 8: How consumers prefer the label shown

Leasing companies

Leasing companies of C1 and C2 vehicles mostly purchase tyres from tyre dealers, while a few buy the C2 tyres directly from tyre suppliers. When buying new cars for their fleet, they have no choice of which tyres are fitted on the car from the beginning. Tyres bought directly from suppliers are not seen by the leasing companies since they are bought through a centralised tender, and therefore labelling is not relevant. However, according to the leasing companies, the tyres they buy from tyre dealers are equipped with tread stickers of the label, or there is printed information on the label values.

When purchasing tyres the leasing companies primarily focus on buying what they refer to as “premium brands”, which are the large tyre manufacturers with long market presence. By buying the premium brand tyres, they assume that they automatically get high quality tyres, and they send an important signal to their customers. The second most important factor is the tyre price, and for some the safety, i.e. wet grip. However, according to the leasing companies interviewed, the label information is not a crucial parameter. The interviewed leasing companies were aware of the tyre label, but were uncertain regarding the understanding of the parameters.

2.2.5 C2 end-users

Large C2 fleet owners purchase tyres through a tender process, much like C3 fleet owners. Owners of only one or a few C2 vehicles purchase tyres more like the C1 end-users in tyre shops. Of the C2 fleet owners interviewed, all were aware of the tyre label, but did not entirely understand the three performance parameters. They all claimed to receive the tyres with stickers on the tread and label info on the invoices.

Their number one priority is what they in general refer to as tyre “quality”, closely followed by the price. The quality, from their point of view, meaning tyre mileage/tread wear and the tyre brand. The interviewed C2 end-users were from Scandinavia, and therefore tyre performance in winter conditions (snow grip) were important to them as well.

2.2.6 C3 end-users

Fleet owners and operators often procure their tyres through a solution service as an alternative to buying and owning the tyres. Solution services are usually offered directly by the tyre manufacturers to the fleets, and is a rental or leasing system. The truck tyres are subject to a rent or lease contract, based on replacement after a certain number of kilometres driven or upon request by the user. Especially medium to large-size truck fleets prefer the solution services, as they enable them to outsource tyre management⁵⁶. The solution services cover all predictable tyres costs over the agreed contract period, and includes frequent tyre inspections and 24/7 roadside assistance. Solution services may or may not include retreading and/or regrooving of the tyres as part of the solution⁵⁷.

The results of the Goodyear survey⁵⁸ showed that 55% of the 500 fleets knew the Tyre Labelling Regulation, while 26 said, they needed a better understanding and 19 that they had never heard of it. Also 54% said that the tyre label influenced their choice of tyres, while 46% said it did not.

Regarding the label criteria, 66% thought fuel efficiency was the most important, and 30% that it was the wet grip. Most of the respondents wanted some kind of wear-related information on the label (86%), while 20% wanted ret readability to be indicated on the label.

⁵⁶ European Tyre and Rubber Manufacturers' Association, ETRMA (2015), "ETRMA Position paper on circular economy – Bringing about a resource efficient and competitive Europe". Brussels, September 2015. Link:

http://www.etrma.org/uploads/Modules/Newsroom/2015-09-29_etrma-position-paper-on-circular-economy_vf.pdf

⁵⁷ ETRMA and industry members (2015), Industry stakeholder meeting, ETRMA offices, Brussels, held September 28 2015.

⁵⁸ MV2 Conseil on behalf of Goodyear (2013), Truck fleet survey with around 500 truck fleets from France, Germany, Italy, Poland and Spain. Link: http://www.fleetfirst.eu/ff_home_en/news/goodyear-fleet-survey-reveals-growing-influence.jsp

3. Market transformation achieved with existing legislation

This chapter assesses the ability of the Tyre Labelling Regulation to achieve market transformation by looking at the development of the three performance parameters rolling resistance, wet grip and external rolling noise. Note that the type approval Regulation (EC) No 661/2009 and the development of minimum requirements herein also affect the tyre market. Hence, the observed market transformation is a combination of the effect of both regulations.

3.1 Data

Since no complete database exist on EU level for the tyre market, data from two large databases are used. The first is the German Tyres Online (TOL) database⁵⁹. Germany is the largest EU-28 country and the location of many tyre producers and importers, ensuring a good representativeness of the data in the database. The data contains the 29 largest tyre brands in all sizes for the years 2012 to 2015, in total there is data on almost 30,000 tyres. The data from 2012 contains a limited number of tyres models, since the Tyre Labelling Regulation was implemented (mandatory) in November 2012, and the labelling parameters were not logged in the database prior to that. The 2012 numbers are thus not considered representative of the market and are omitted from calculations.

The other is the database from the Dutch Tyre and Wheel Trade Association (VACO)⁶⁰. A large part of European tyre trade goes through Holland, and most of the tyres in the database are sold in other European countries. The data from VACO is for the years 2013 to 2015 and includes the top seven brands (Michelin, Continental, Bridgestone, Goodyear, Dunlop, Pirelli, Hankook, Vredenstein) in the seven most sold sizes. In total, the VACO dataset contains data of around 2,500 tyre models.

The data from both databases is tyre model counts (number of tyre models on the market), and includes both summer and winter tyres. It has not been possible to find any sources that could provide sales weighted data. However, the ecodesign and energy labelling review study on household refrigeration⁶¹ concludes that sales weighted figures only differ a few percent from model counts, being a little lower in efficiency classes. It is therefore assumed that the database model count is representative for the tyre market in Europe.

3.2 Market transformation on fuel efficiency (Rolling Resistance)

Both datasets show improvement of the average rolling resistance from 2013 to 2015 as illustrated in Figure 9. Improvements are especially seen for C1 and C2 tyres, whereas the rolling resistance for C3 tyres only increased little in this period. Analysis of the data reveals that the market transformation is primarily caused by a shift in label classes from class F (E for C3 tyres) to C and B. This shows that the tyre label has affected the market to shift towards better fuel efficiency classes than the lowest permissible according to the minimum requirements. However, for tyres with the best fuel efficiency classes, A and B, the market penetration is still very low (0-1 % for all tyre types), which indicates that there still is a large improvement potential.

⁵⁹ Tyres online and Energy GmbH, database extractions from year 2012-2015, Hämmerling Group, Germany.

⁶⁰ Dutch Tyre and Wheel Trade Association, database extract from year 2013-2015, VACO, Netherlands.

⁶¹ VHK and ARMINES, November 2015, "Ecodesign & Labelling Review Household Refrigeration" Preparatory/ review study Commission Regulation (EC) No. 643/2009 and Commission (Delegated) Regulation (EU) 1060/2010.

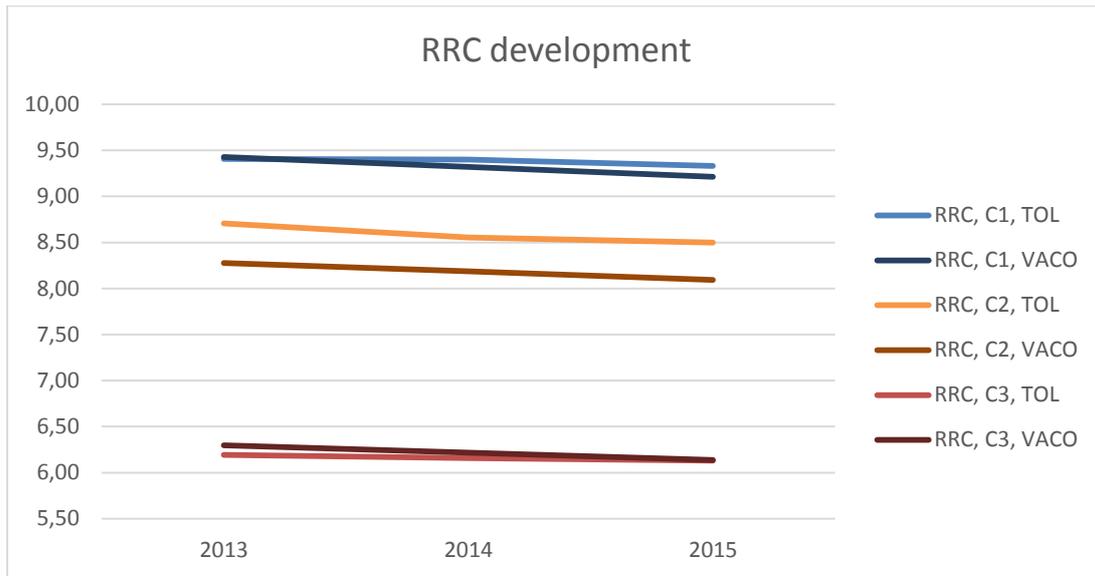


Figure 9: Market transformation on average rolling resistance for all tyre types according to the TOL and VACO datasets

A clear difference is observed between the three tyre types with C3 tyres having the lowest RRC and C1 tyres the highest. This is because rolling resistance is measured as kg resistance/ton vehicle, and since C1 tyres have a lower load carrying capacity than C2 and C3 tyres, a higher rolling resistance coefficient is allowed in both the Type Approval Regulation and the various fuel efficiency classes (see chapter 1.2.1).

The two datasets show a difference in the rates of change in RRC from 2013 to 2015, which are significantly higher for C1 and C3 in the VACO data (Table 15). This faster improvement of fuel efficiency is probably because the VACO database contains only what is generally referred to as 'premium brands', most of which are also the brands with highest R&D investments⁶².

The average rolling resistance of models on the market in 2015 is compared to the forecasts from the original impact assessment report made in connection with preparation of the Tyre Labelling Regulation (EPEC,2008)⁶³, as seen in Table 14. The EPEC impact assessment included a no-label scenario, a slow pace and a fast pace dual label scenario. Dual labelling meaning that C1 tyres are labelled for both wet grip and fuel efficiency. For the comparison the most positive scenario, the fast pace implementation, from the impact assessment was used.

Table 14: RRC predicted and observed market values for 2015

2015 RRC values	C1	C2	C3
Predicted, EPEC, fast pace	10,52	9,17	6,08
Corresponding fuel efficiency class	E	E	D
Observed, TOL and VACO average	9,27	8,30	6,13
Corresponding fuel efficiency class	E	E	D

The comparison shows that the observed RRC values in 2015 is lower for C1 and C2 tyres than predicted, though they still fall into labelling class E. For the C3 tyres, the observed RRC is slightly higher than the predicted value, but the class is D for both (very close to C, which

⁶² Rubbernews (2011), "R&D Spending trends" website last updated September 2011. Link: <http://www.rubbernews.com/article/TB/20110901/STATISTICS/121019921/rd-spending-trends>

⁶³ European Policy Evaluation Consortium, EPEC (2008), "Impact Assessment study on possible energy labelling of tyres" and Annexes to the Impact Assessment, Brussels, July 2008.

starts at 6.0 kg/ton). Based on these observations the market development has been more positive than foreseen. However, when looking at the annual change in rolling resistance, shown in Table 15, the market data shows very low changes in RRC from 2013 to 2015, especially the data from the TOL database. Hence, the lower rolling resistance in 2015 is not due to faster changes in 2013-2015, but due to a lower starting point in 2013, than anticipated in the EPEC impact assessment. This suggests that an improvement if the yearly change rates does not improve, it will result in a very slow market transformation not giving the anticipated fuel savings⁶⁴.

However, as noted in the EPEC impact assessment, the uptake of products with higher energy efficiency take several years, with the market penetration of A labelled products being low in the first years after implementation. In these years, the price premium for A labelled products is still high, as is also observed on the tyre market, and the consumer awareness of the label and the cost savings it provides is still developing. Hence, rolling resistance change rates are likely to increase during the coming years if the implementation is continuously supported.

According to the Triple-A study by TNO⁶⁵, the current market distribution with relatively few A-labelled tyres can be explained by low consumer awareness. The low awareness makes end-users reluctant to pay extra for A-labelled tyres, because they are not aware of the benefits it might bring.

Table 15: Change rates in percent per year for RRC in observed data compared to EPEC scenarios

	Database market data		EPEC scenarios (dual labelling C1)		
	TOL	VACO	No labelling	Slow pace	Fast pace
C1	-0.4 %	-1.1%	-1.7 %	-2.5%	-2.7%
C2	-1.2 %	-1.1%	-1.8 %	-3.0%	-4.3%
C3	-0.5 %	-1.3%	-2.0%	-2.6%	-5.0%

3.3 Market transformation on wet grip

Both datasets show an increase of the wet grip from 2013 to 2015 (Figure 10), however the improvement is more clear for the VACO data than the TOL data, which probably is because the VACO data contains only the so-called premium brands. This is also seen by the wet grip change rates in Table 16, which are higher for the VACO data.

The market transformation is primarily caused by a shift in label classes from class E and C (only C for C3 tyres) to A and B. Hence, also for wet grip it is not only the minimum requirements in the Type Approval Regulation (661/2009) that are responsible for the market transformation. The tyre market is shifting towards the two highest wet grip classes from the middle categories, showing the influence of the label. The market share of the wet grip class B is high for all tyre types (41 %-46 %) whereas the share of class A is still rather low and more differentiated with 3 % for C3, 8 % for C2, and 16 % for C1 tyres. This makes wet grip the parameter with highest percentage of A and B ratings. However the number of AA labelled tyres (A in both wet grip and fuel efficiency), is between 0-1 % for all tyre types. Therefore, it is considered premature to revise the labelling scale requirements for both wet grip and fuel efficiency.

According to the tyre industry, the high wet grip performance is linked to their focus on developing tyres with better wet grip to increase road safety, while maintaining (or when

⁶⁴ European Policy Evaluation Consortium, EPEC (2008), "Impact Assessment study on possible energy labelling of tyres" and Annexes to the Impact Assessment, Brussels, July 2008

⁶⁵ TNO, Memorandum To Ministry of Infrastructure and Environment, "Potential benefits of Triple-A tyres in the EU" Link: <http://www.unece.org/fileadmin/DAM/trans/doc/2014/wp29grb/GRB-60-13e.pdf>

possible increase) fuel efficiency. This is supported by the findings from a study made for the European Commission in 2014⁶⁶, which found that the main technological developments were related to advanced material compositions to achieve high wet grip and fuel efficiency simultaneously.

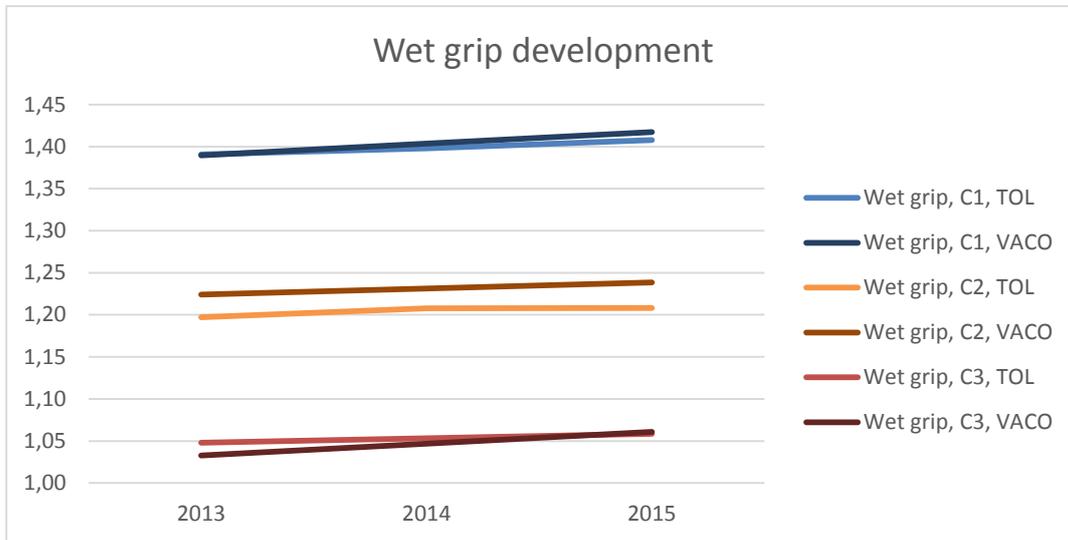


Figure 10: Market transformation on average wet grip for all tyre types

Table 16: Observed wet grip values for 2015 and change rates in the two datasets

	C1	C2	C3
Wet grip on market, TOL and VACO average	1,41	1,22	1,06
Corresponding label class	B	C	C
Change rates in wet grip (% pa) – TOL	0.6%	0.5%	0.51%
Change rates in wet grip (% pa) – VACO	1.0%	0.6%	1.3%

3.4 Market transformation on external rolling noise

The external rolling noise is shown on the tyre label both as a measured value in dB and as noise classification. The market transformation on external rolling noise, shown in Figure 11, is based on average measured values. For all tyre types, the changes in external rolling noise from 2013 – 2015 are quite small, all below 1 % pa (Table 17). Furthermore, the rates are not explicitly positive or negative for C1 and C2 tyres, which appear from Table 17, while for the C3 tyres, the external rolling noise shows a decreasing trend in both datasets. This is in accordance with findings from the consumer survey showing that external rolling noise is the one of the three labelling parameters that consumers rate as least important (see chapter 3.2.4), and also the parameter rated least important by C3 end-users.

As opposed to the rolling resistance and wet grip, the external rolling noise is not as clearly differentiated between the tyre types. The C2 and C3 average performance is similar, as seen in Table 17. For the C2 and C3 tyres, the change rates of noise levels are also similar for the two datasets as shown in Table 17. For C1 tyres, however, there is a large difference in the two datasets and the rates are quite different. This is ascribed to the VACO dataset containing only the so-called premium tyre brands.

⁶⁶ Braungardt et al., 2014, "Impact of Ecodesign and Energy/Tyre Labelling on R&D and Technological Innovation", 23 may 2014. Project number DESNL13606. Link: <http://www.ecofys.com/files/files/fraunhofer-ecofys-2014-impact-of-ecodesign-energy-labelling-on-innovation.pdf>

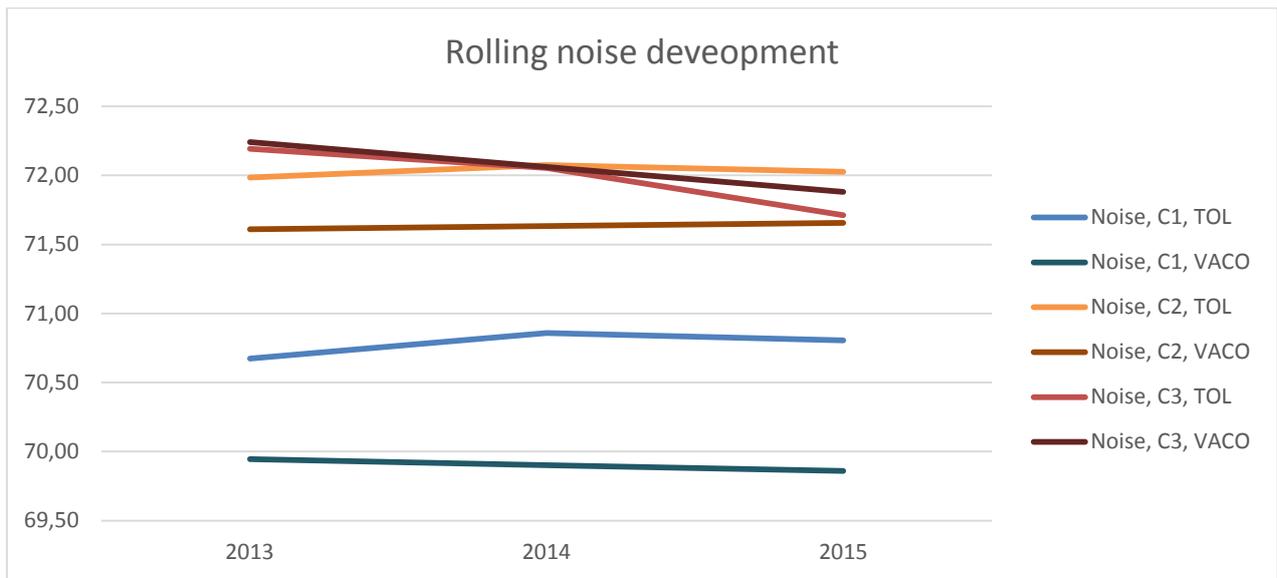


Figure 11: Market transformation on average external rolling noise (average measured values) for all tyre types

Table 17: Average external rolling noise values and change rates in the TOL and VACO datasets

	C1	C2	C3
Noise on market, TOL and VACO average	70.3 dB	71.8 dB	71.8 dB
Change rates in noise (% pa) – TOL	0.09%	0.03%	-0.33%
Change rates in noise (% pa) – VACO	-0.06%	0.03%	-0.25%

4. Market development potentials

In this chapter, the potential market development until 2030 is estimated for each of the labelling performance parameters. Future development until 2030 are estimated for a business as usual scenario, BAU, and an optimised implementation scenario, OI.

- **The BAU scenario**⁶⁷ is defined as a baseline for how the tyre labelling scheme is predicted to affect the market without further interventions, and is forecasted as a linear extrapolation of the market change observed in the TOL data from 2013-2015.
- **The OI scenario** is based on the assumption that the average fuel efficiency will be class B in 2030. Achievement of a development in line with the OI scenario will among others require increased awareness among end-users, focus on presale information and improved market surveillance. Please see summary of recommendations in section 10.

The TOL dataset has been used for the analysis, since it contains a wider range of tyre brands and are therefore a better representative for the market compared to the VACO data, which contains only the premium brands. A summary of the TOL data on which the forecasts are based, is shown in Table 18.

Table 18: Data on the three labelling parameters from TOL, shown as market averages

	2013	2014	2015
Rolling resistance coefficient (kg/ton)			
C1	9.41 (E)	9.40 (E)	9.33 (E)
C2	8.71 (E)	8.55 (E)	8.50 (E)
C3	6.19 (D)	6.16 (D)	6.13 (D)
Wet grip (wet grip index, G)			
C1	1.39 (C)	1.40 (B)	1.41 (B)
C2	1.20 (C)	1.21 (C)	1.21 (C)
C3	1.06 (C)	1.05 (C)	1.06 (C)
External rolling noise (measured dB)			
C1	70.67	70.86	70.80
C2	71.98	72.07	72.03
C3	72.19	72.05	71.71

4.1 Modelling

A stock model has been developed based on tyre sales data provided by ETRMA⁶⁸ and on the expected tyre lifetimes from an ecodesign impact accounting study from 2013⁶⁹. From 2016 new tyres sales were extrapolated with a 2 % increase per year until 2030, based on industry forecasts of light vehicle (C1 + C2) tyre sales of 280 million in 2020⁷⁰. The expected tyre sales were combined with expected tyre lifetimes to calculate the stock (number of tyres in use in the EU). An extract of the model is shown in Table 19. The fuel consumption for each vehicle type was forecasted for the period as well, taking into account the expected reductions in fuel consumption from technology development of cars, based on numbers from ETRTO and CARS

⁶⁷ Not to be confused with the original BAU scenario in the EPEC study. This 'Business-as-Usual' scenario is an intermediate assessment of the continued effect of the measure.

⁶⁸ European Tyre and Rubber Manufacturers' Association, ETRMA (2016), "European Tyre & Rubber Industry; Statistics Edition 2015". Link: <http://www.etrma.org/uploads/documents/Statistics%20booklet%20-%20edition%202015.pdf>

⁶⁹ Van Holsteijn en Kemna B.V. - VHK (2014), "Ecodesign impact accounting – Part 1, Status Nov. 2013". Link: https://ec.europa.eu/energy/sites/ener/files/documents/2014_06_ecodesign_impact_accounting_part1.pdf.

⁷⁰ European Tyre and Rubber Manufacturers' Association, ETRMA (2016), "European Tyre & Rubber Industry; Statistics Edition 2015".

21⁷¹. This was used together with the stock model to estimate fuel savings on EU level and hence the environmental improvement potential.

Table 19: Extract of the tyre stock model, number of tyres in use (thousands)

(Thousands)	2010	2015	2020	2025	2030
C1	611,753	616,808	687,711	763,018	846,571
C2	30,404	31,305	35,499	39,386	43,699
C3 - New	18,717	21,557	24,354	27,021	29,979
C3 - Retreaded	8,739	7,688	7,208	6,846	7,496

Table 20 summarises the assumptions used in the stock model, which are based on information from the EPEC impact assessment⁷² and data from TOL and VACO.

Table 20: Basic assumptions used in the stock model

	Average tyre mileage	Km/year/vehicle	Average tyre lifetime	TOL RRC, 2015	Fuel saving potentials
C1	40,000 km	16,000 km	2.5 years	9.33 kg/ton	1.5% per kg/ton
C2	40,000 km	22,000 km	1.8 years	8.50 kg/ton	1.5% per kg/ton
C3	100,000 km	60,000 km	1.7 years	6.13 kg/ton	5% per kg/ton

4.2 Rolling resistance development

The tyre labelling scheme has until now utilised only a minor part of the fuel saving potential, and with the BAU scenario the average fuel efficiency would be class C for all tyre types in 2030. The OI scenario is based on the assumption that the average fuel efficiency will be class B in 2030. The extent of future savings depends on how effectively the labelling scheme is implemented and enforced as well as suppliers' and consumers' response.

In the Figures below the BAU and OI scenarios regarding the RRC development are compared to the three scenarios from the EPEC impact assessment. The three scenarios from EPEC are the 'No labelling' scenario, and the two dual labelling⁷³ scenarios 'fast pace' implementation and 'slow pace' implementation. Dual labelling meaning that C1 tyres is labelled with both fuel efficiency and wet grip. These scenarios are in the EPEC report based on the market shares of various label values. To allow comparison the values are for the analysis in this study converted to average RRC values. Furthermore, the EPEC scenarios were only established until 2020. These numbers were therefore extrapolated until 2030 under the assumption that the RRC change rate would decrease after 2020 due to technical limitations. The EPEC data is shown in Appendix 2, and Table 21 shows the development in rolling resistance from 2015 to 2030 according to the BAU, OI and EPEC scenarios for C1, C2 and C3 tyres.

⁷¹ European Policy Evaluation Consortium, EPEC (2008), "Impact Assessment study on possible energy labelling of tyres" and Annexes to the Impact Assessment, Specific contract: DG TREN No TREN/D3/375-2006 with GHK Consulting, Brussels, July 2008

⁷² European Policy Evaluation Consortium, EPEC (2008), "Impact Assessment study on possible energy labelling of tyres" and Annexes to the Impact Assessment, Specific contract: DG TREN No TREN/D3/375-2006 with GHK Consulting, Brussels, July 2008

⁷³ Dual labelling: both RRC and wet grip labelling for C1 tyres. In the EPEC scenarios, wet grip for C2 and C3 was not forecasted, and neither was external rolling noise levels.

Table 21: Average rolling resistance values in 2015 and 2030 in the BAU, OI and EPEC scenarios.

	RRC 2015		RRC 2030				
	BAU and OI	EPEC scenarios	BAU	OI	EPEC No label	EPEC slow, dual	EPEC fast, dual
C1	9.3 (E)	10.8 (F)	8.8 (C)	7.1 (B)	9.9 (E)	8.3 (C)	7.2 (B)
C2	8.5 (E)	9.6 (F)	7.1 (C)	6.2 (B)	8.1 (E)	6.2 (B)	5.4 (A)
C3	6.1 (D)	6.4 (D)	5.7 (C)	4.6 (B)	5.1 (C)	4.4 (B)	3.5 (A)

The BAU and OI scenarios together with the EPEC scenarios of the RRC development are shown in Figure 11, 13 and 14 for C1, C2 and C3 tyres, respectively.

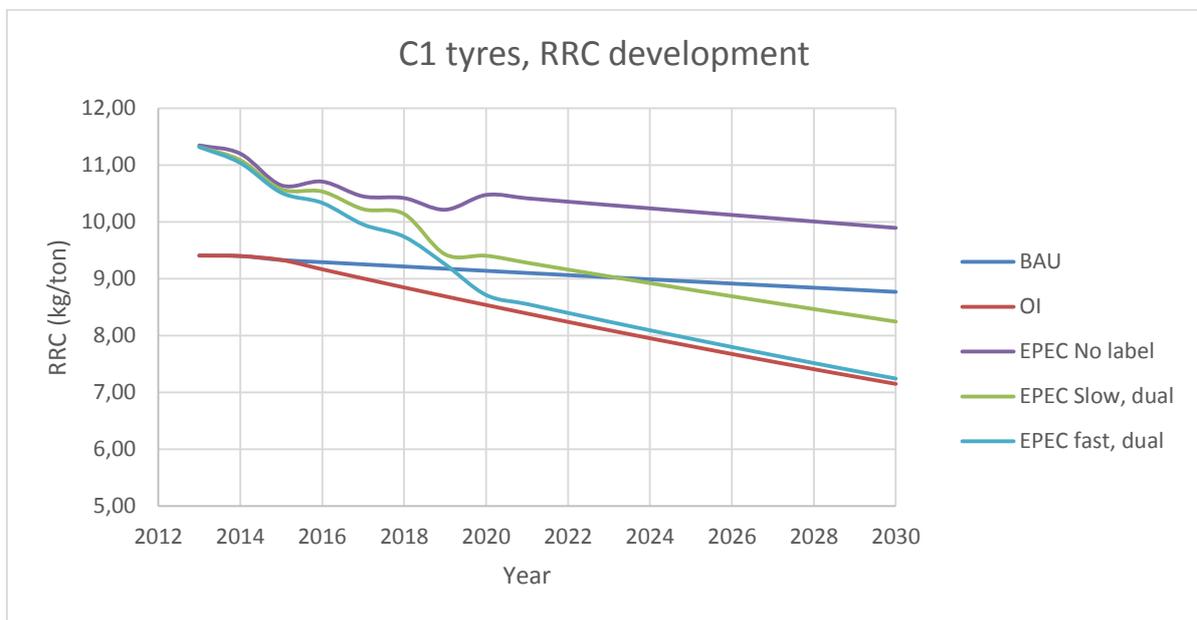


Figure 12: Average market RRC development for C1 tyres

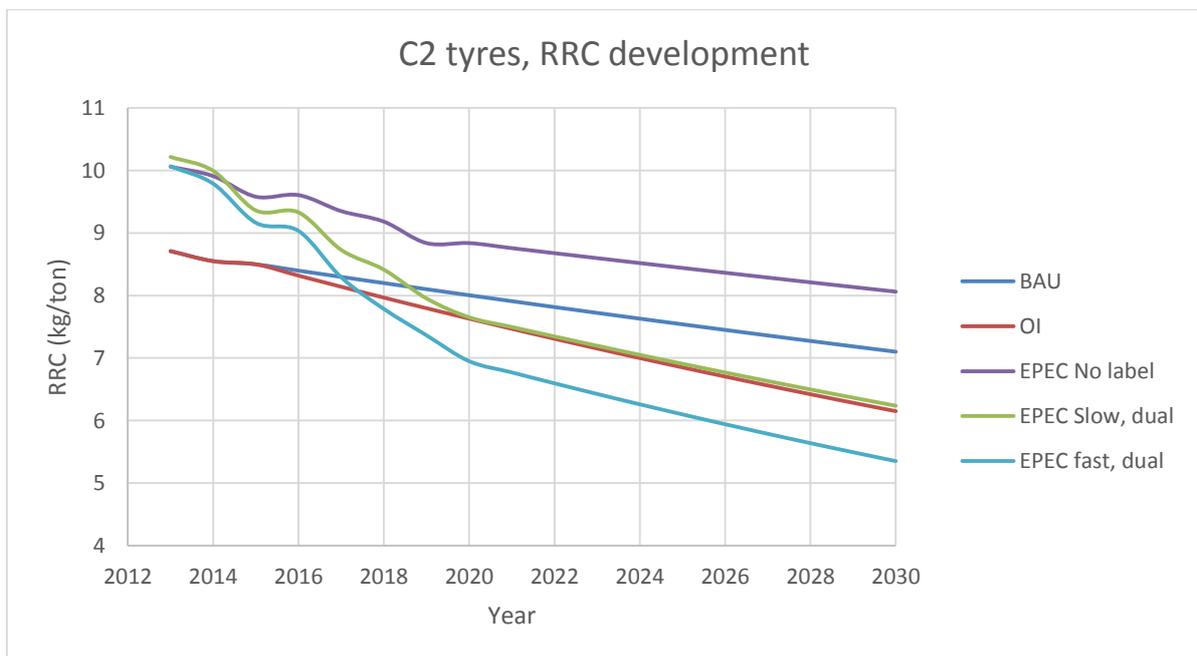


Figure 13: Average market RRC development for C2 tyres

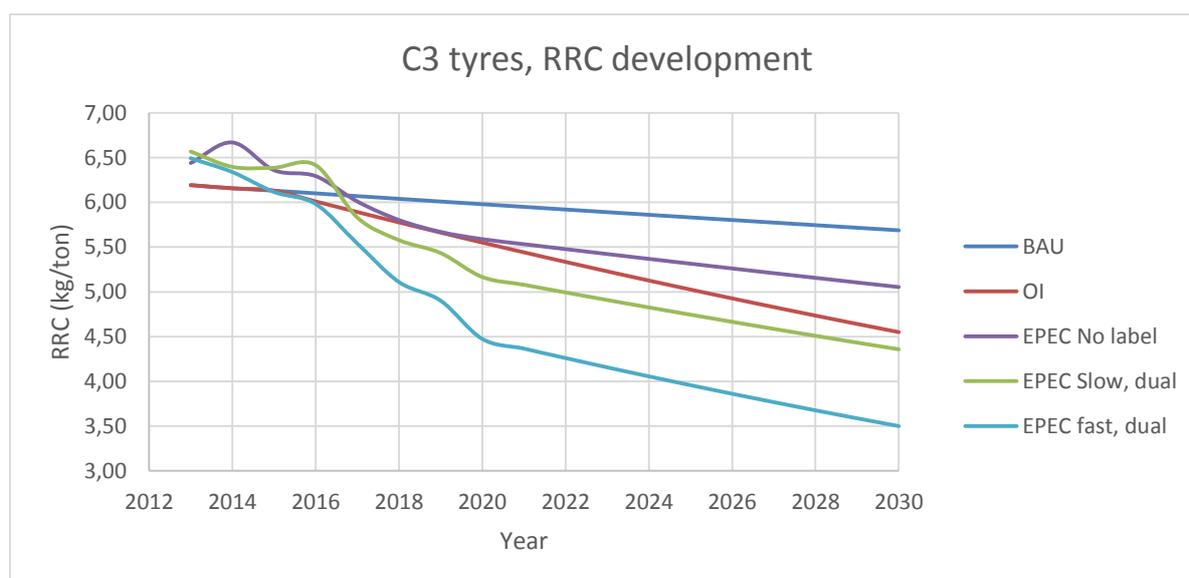


Figure 14: Average market RRC development for C3 tyres

The data from the TOL database shows that the average rolling resistance of tyre models on the market in 2015 are lower than estimated in the EPEC scenarios, especially for C1 and C2 tyres. The TOL data does not include all low-priced tyre brands and the average rolling resistance might therefore be a few percent lower. Furthermore, the EPEC scenario are based on estimations, since no market data existed prior to implementation of the labelling, and hence the starting point might have been lower than expected.

The lower RRC in 2015 for C1 and C2 means that the BAU scenario, despite its slower decreasing rate, yields lower RRCs than the EPEC No labelling scenario in 2030. Hence, the tyre label as it is now has provided a market improvement compared to no labelling. This is not the case for C3 tyres, where the 2015 RRC are more similar, and the faster change rate in the EPEC No label scenario therefore implies a market improvement, that cannot be observed in the real-life market data. Even for C1 and C2 tyres, the BAU scenario would result in average fuel efficiency class C in 2030, which is also the result of the EPEC No label scenario, indicating only a minor improvement.

The BAU scenario does not provide the savings anticipated in any of the EPEC labelling scenarios, due to the slow decreasing rates of RRC. This indicates that a more efficient implementation of the labelling scheme is necessary. The possible effects of a more efficient implementation is illustrated in the OI scenario. Since the technology already exists, the realisation of the OI scenario depends highly on user awareness and efficient enforcement (see chapter 8). For C1 tyres, the OI scenario gives close to the same market improvement as the EPEC fast implementation scenario. For C2 and C3 tyres the OI results are closer to the EPEC slow implementation scenario.

4.2.1 Energy savings

The BAU scenario results in a total fuel of saving (C1, C2 and C3) of 107.5 PJ in 2030 (7.8 Mton CO₂)⁷⁴, whereas the OI scenario results in saving of 364 PJ in 2030 (26.4 Mton CO₂). This

⁷⁴ CO₂ emissions Covenant of Mayors for Climate and Energy (2015), "Technical annex to the SEAP template instruction documents: Emission factors". Link: http://www.eumayors.eu/IMG/pdf/technical_annex_en.pdf

corresponds to 0.9 % and 3.1 % respectively of the annual road transport consumption⁷⁵. Hence, the OI scenario results in more than three times the fuel saving as the BAU scenario in 2030.

For the average fuel efficiency to be class A by 2030, a change rate of -3.5 % pro anno is required, and the resulting savings would be 573 PJ in 2030 (41.6 Mton CO₂), corresponding to 4.9 % of annual road transport consumption. This result is similar to that obtained in a study by TNO⁷⁶ on triple-A tyres in EU, which also showed savings of 5 % of the total CO₂ emissions from road transport in the EU in 2030.

4.3 Wet grip development

Wet grip is the labelling parameter with the highest classification according to the A-G scale used in the labelling scheme, and with the BAU scenario, the average wet grip would be class B for all tyres types in 2030. The OI scenario for wet grip is based on the assumption that the average wet grip will be class A in 2030, which would require faster market penetration of high performing tyres.

Wet grip labelling of C2 and C3 tyres were not included in the EPEC impact assessment, and wet grip was forecasted only for C1 tyres. The EPEC scenarios included a 'No labelling' scenario, where the wet grip was not expected to change, and the 'dual labelling' scenario, where wet grip was included in the label for C1 tyres. These scenarios were described in the report as marked shares of various label values, and were therefore interpreted into average wet grip to allow comparison. Furthermore, the forecast was only provided until 2020, and these numbers were therefore extrapolated until 2030 under the assumption that the wet grip change rate would remain constant. The calculations is shown in Appendix 2.

The BAU and OI forecasts together with the EPEC scenario forecasts of the wet development are shown in Figure 15 for C1 tyres and Figure 16 for C2 and C3 tyres.

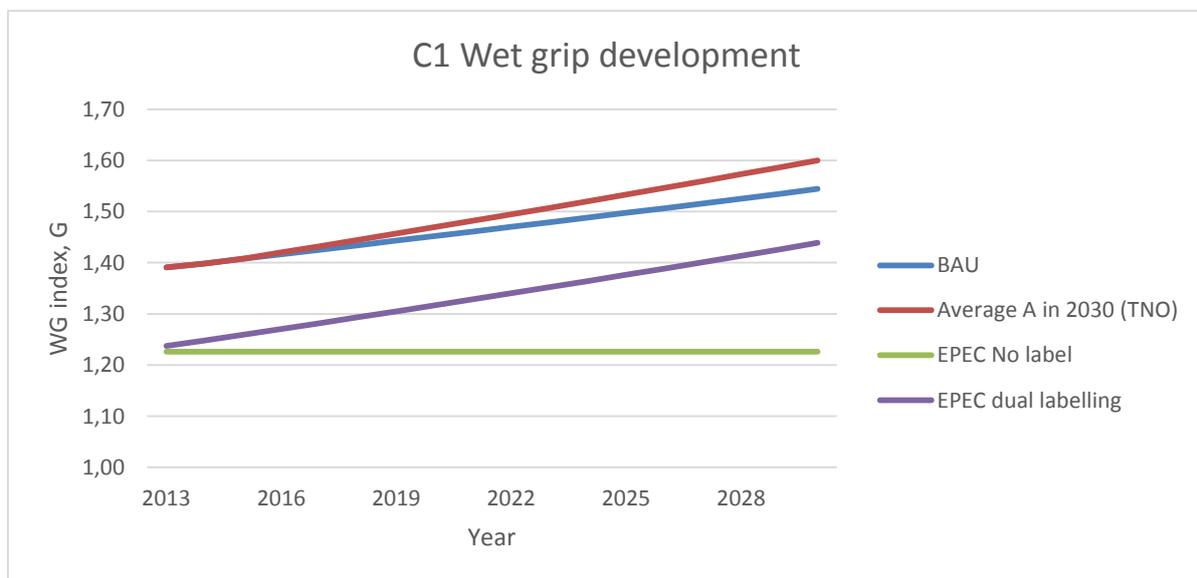


Figure 15: Wet grip market development for C1 tyres, including scenarios from EPEC, 2008.

⁷⁵ European Commission (2014), "EU transport in figures, statistical pocketbook 2014", European Union, 2014. ISBN 978-92-79-37506-4. Link: <http://ec.europa.eu/transport/facts-fundings/statistics/doc/2014/pocketbook2014.pdf>

⁷⁶ TNO, Memorandum To Ministry of Infrastructure and Environment, "Potential benefits of Triple-A tyres in the EU" .

The wet grip market average in 2015 for C1 tyres was 1.40 according to the TOL data, which corresponds to class B (borderline to class C). This is one class higher than the 1.23 (class C) expected in the EPEC impact assessment for 2015. This difference in 2015 expectations and actual data might be caused by a combination of different factors. First, the numbers in the EPEC impact assessment is based on market estimations, since no actual data existed prior to the labelling scheme implementation. These estimations might have been too conservative. Second, the TOL data does not include some of the low-priced tyres brands, which most likely have lower wet grip ratings, thus the actual wet grip average might be a few percent lower. Third, the wet grip is the parameter that has received most attention regarding technology development, and it is possible that an improvement happened up to the labelling implementation from 2009-2012.

Despite the higher starting point in the BAU scenario, the slower market change (0.6 % pa) means that the average wet grip would remain in class B (borderline to A) until 2030. This is more positive than the EPEC no label scenario, where no change in wet grip was expected without the label. However, when comparing the BAU scenario to the EPEC dual labelling, both would result in average label class B by 2030.

The BAU result in a slightly higher average wet grip (G=1.54) compared to the EPEC dual label scenario (G=1.44) by 2030, but only due to the higher starting point, since the change rate in the EPEC dual label scenario (0.9 % pa) exceeds that of the BAU scenario. Indeed, the change rate needed to achieve the OI scenario (average wet grip class A by 2030), is 0.9 % pa.

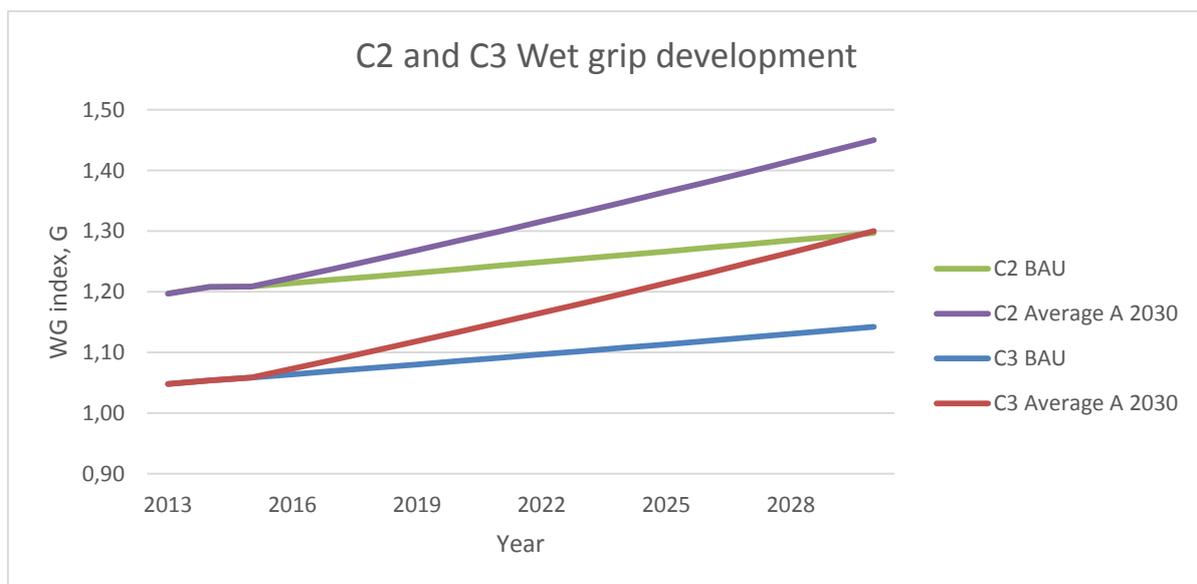


Figure 16: Wet grip market development for C2 and C3 tyres

As seen in Figure 16 the change rates of wet grip is lower for C2 (0.47 % pa) and C3 tyres (0.51 % pa) than for C1 tyres, which would result in average label class B for both by 2030 in the BAU scenario. To achieve the OI scenario of wet grip class A as average by 2030, change rates of 1.2 % pa and 1.4 % pa would be required. According to the TNO study⁷⁷, the use of tyres labelled 'A' for wet grip would entail that "Yearly, 2,567 less people would be killed in traffic accidents, the number of serious injuries would be reduced by 12,353 and the number of slight injuries would be reduced by 19,631".

⁷⁷ TNO, Memorandum To Ministry of Infrastructure and Environment, "Potential benefits of Triple-A tyres in the EU"

4.4 External rolling noise development


The external rolling noise is the labelling parameter where least market improvement can be seen, and the average measured noise values are decreasing only for the C3 market, as seen in Figure 17. The external rolling noise development is estimated using the measured values in dB, and the OI scenario is based on an average external rolling noise of 68.0-68.5 dBA by 2030. There are no forecasts in the EPEC impact assessment of external rolling noise.

According to industry, C1 end-users⁷⁸, and a study on the innovation impact of the tyre labelling scheme⁷⁹, the external rolling noise receives less attention than wet grip and fuel efficiency. This explains the increasing rates for C1 (0.09 % pa) and C2 tyres (0.03 % pa), i.e. an increase in external rolling noise levels, which is the opposite of the intention. Only the C3 tyre market shows an improvement in the BAU scenario regarding external rolling noise levels, which decreases with 0.33 % pa. This results in an average external rolling noise level of 68.2 dBA for C3 tyres by 2030.

The OI scenario is based on the assumption that the external rolling noise for C1 and C2 tyres will be 68.5 dBA on average in 2030, and 68.0 for C3 tyres. This would require change rates of -0.27 %, -0.38 %, and -0.35 % per year for C1, C2 and C3 tyres, respectively. These change rates are close to the one actually seen for C3 tyres from 2013-2015 (the BAU scenario), and it is therefore considered realistic to reach this.

For C2 and C3 tyres the external rolling noise in the IO scenario would be more than 3 dB under the limit values given in Regulation 661/2009 (for normal tyres), and thus result in the lowest noise class (one sound wave). For C1 tyres the noise limits depend on the tyre size, but 68.5 would be 1.5 dBA below the limit value for the smallest tyres (70 dBA), and more than 3 dBA below the limit value for the largest tyres (74 dBA) (see Table 6).

According to the TNO triple-A study⁸⁰, decreasing the noise to the lowest class would entail that “the number of annoyed and highly annoyed people by road traffic would be reduced by 8.3 and 13 million respectively. The number of sleep-disturbed and highly sleep-disturbed people would be reduced by 3.4 and 6.1 million respectively”.

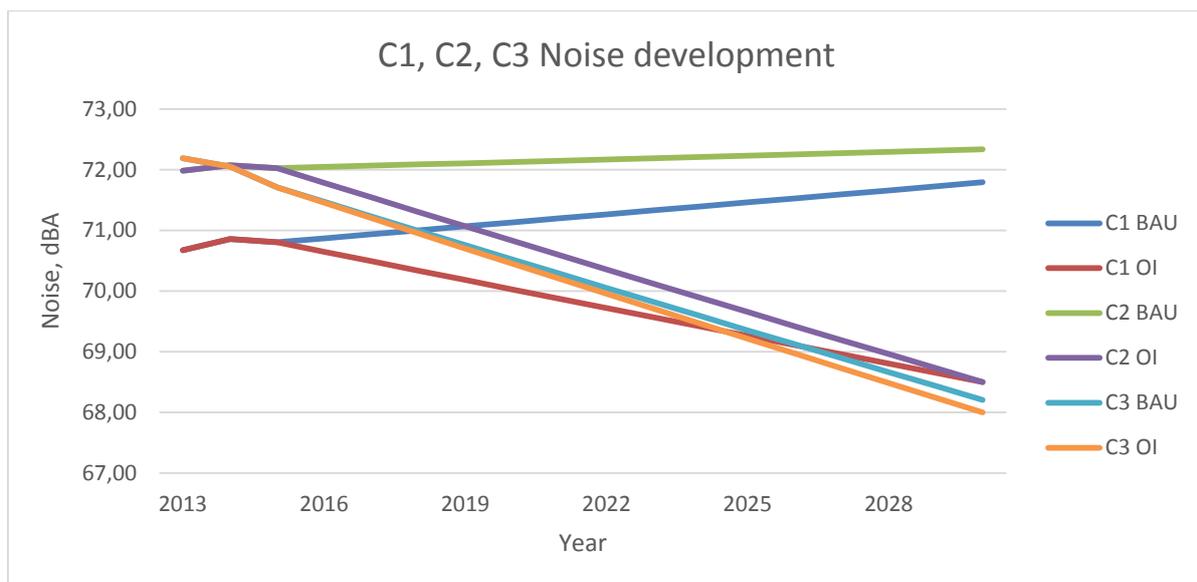

⁷⁸ C1 end-user survey of label awareness. Useneeds on behalf of Viegand Maagoe A/S, 2015. See Appendix 1.

⁷⁹ Braungardt et al. (2014), “Impact of Ecodesign and Energy/Tyre Labelling on R&D and Technology Innovation”, Link: <http://www.ecofys.com/files/files/fraunhofer-ecofys-2014-impact-of-ecodesign-energy-labelling-on-innovation.pdf>

⁸⁰ TNO, Memorandum To Ministry of Infrastructure and Environment, “Potential benefits of Triple-A tyres in the EU”

Figure 17: External rolling noise development for C1, C2 and C3 market for BAU and OI scenarios

4.5 Summary of market development potentials

As a summary of this chapter, the market development potentials for each of the parameters RRC, wet grip and external rolling noise are shown in Table 22. These are the 2030 values in the BAU scenario, the OI scenario and the three EPEC scenarios for each parameter for C1, C2 and C3 tyres, respectively. The external rolling noise was not forecasted for any of the tyre types in the EPEC impact assessment, and the wet grip was not forecasted for C2 and C3 tyres.

Table 22: 2030 market averages of the three labelling parameters for the BAU, OI and the EPEC scenarios

Market development potentials, 2030		BAU	OI	EPEC No label	EPEC slow	EPEC fast
C1	Rolling resistance coefficient	8.8 (C)	7.15 (B)	9.9 (E)	8.3 (C)	7.2 (B)
	Wet grip index	1.54 (B)	1.60 (A)	1.23 (E)	1.44 (B)	1.44 (B)
	External rolling noise, measured	71.8 dBA	68.5 dBA	-	-	-
C2	Rolling resistance coefficient	7.1 (C)	6.2 (B)	8.1 (E)	6.2 (B)	5.4 (A)
	Wet grip index	1.30 (B)	1.45 (A)	-	-	-
	External rolling noise, measured	72.3 dBA	68.5 dBA	-	-	-
C3	Rolling resistance coefficient	5.7 (C)	4.6 (B)	5.1 (C)	4.4 (B)	3.5 (A)
	Wet grip index	1.14 (C)	1.30 (A)	-	-	-
	External rolling noise, measured	68.2 dBA	68.0 dBA			

5. Inclusion of new performance parameters

In this chapter, the possibilities to include three new tyre performance parameters in the tyre labelling scheme are discussed. The three performance parameters are ice and snow grip, mileage, and abrasion.

5.1 Ice and snow grip

The tyre labelling scheme does not distinguish snow tyres from other tyres, and there is no mentioning of snow grip on the label. For all tyres, the wet grip index is used as a measure for safety. However, this carries a potential risk of misleading consumers purchasing winter tyres, since tyres designed to perform better on snow and ice, often have a poorer wet grip than standard reference test tyres (SRTT). This is also reflected in the Type Approval Regulation (661/2009), where the wet grip minimum requirements for C1 tyres are less strict for snow tyres (i.e. lower wet grip is allowed). According to the Danish Traffic Agency, a snow tyre has 10-15 % longer braking distance than non-snow tyres on dry or wet road, but 40-45 % shorter braking distance on snow and ice than normal tyres⁸¹. The inclusion of snow and ice performance in the labelling scheme is a matter of safety and provision of clear information to consumers.

5.1.1 Definitions of Snow tyres and marketing terms

Many different terms are used for tyres designed to perform well in wintry conditions, of which some are used in regulatory context and others are purely marketing terms. The marketing terms include "summer tyres", "winter tyres" and "all season tyres". Since there as of today are no legal definition of what these terms cover, the following regulatory definitions will be used in the following to avoid confusion.

UNECE Regulation 117⁸² defines a 'snow tyre' as "a tyre whose tread pattern, tread compound or structure is primarily designed to achieve in snow conditions a performance better than that of a normal tyre with regard to its ability to initiate or maintain vehicle motion". This definition applies to all tyre types (C1, C2, C3). Snow tyres can be labelled with the M+S (Mud + Snow) marking on the tyre sidewall as mentioned in UNECE Regulation No 30⁸³ and 54⁸⁴. M+S is a manufacturer declaration stating that the tyre tread compound and pattern are intended for mud and/or snow conditions with no further requirements or tyre performance tests.

M+S tyres also include tyres made for terrain driving, which are made of rubber types that are not applicable for winter conditions. In Sweden and Norway the M+S symbol is used to define winter tyres, but only as long as the tyres are "designed specifically for winter conditions"⁸⁵, which is defined in those countries by the Scandinavian Tyre and Rim Organisation, STRO. Every year STRO issues a list of approved winter tyres based on the technical information of

⁸¹Danish transport and Construction Agency (2009), "Tænk over dækvalg og hastighed", (English: "Think about tyre choice and speed"). Link: <http://www.trafikstyrelsen.dk/DA/Presse/Nyhedsarkiv/Syn-og-koeretoer/2009/10/T%C3%A6nk-over-d%C3%A6kvalg-og-hastighed.aspx>

⁸² UNECE (2014), Addendum 116: Regulation No. 117, Revision 3, "Uniform provisions concerning the approval of tyres with regard to rolling sound emissions and/or to adhesion on wet surfaces and/or to rolling resistance", United Nations, February 2014. Link:

<https://www.unece.org/fileadmin/DAM/trans/main/wp29/wp29regs/updates/R117r3e.pdf>

⁸³ UNECE (2013), Addendum 29: Regulation No. 30, Revision 3 – Amendment 3, "Uniform provisions concerning the approval of pneumatic tyres for motor vehicles and their trailers", United Nations, February 2013. Link:

<https://www.unece.org/fileadmin/DAM/trans/main/wp29/wp29regs/updates/R030r3am3e.pdf>

⁸⁴ UNECE (2013), Addendum 53: Regulation No. 54, Revision 3, "Uniform provisions concerning the approval of pneumatic tyres for commercial vehicles and their trailers", United Nations, March 2013. Link:

<https://www.unece.org/fileadmin/DAM/trans/main/wp29/wp29regs/2013/R054r3e.pdf>

⁸⁵ Transportstyrelsen, Sweden (2016), "Vinterdäck" (English: "Winter tyres"). Link:

<https://www.transportstyrelsen.se/sv/vagtrafik/Fordon/Fordonsregler/dack/Vinterdack/>

the tyres⁸⁶. This list is necessary, since the M+S label includes no requirements for tread compounds, and the marking therefore does not ensure better performance at low temperatures or on snow and ice, hence STRO make a more thorough assessment of the tyre components and construction, to approve them for the list.

The UNECE Regulation 117⁸⁷ defines a 'severe snow tyre' ('snow tyre for use in severe snow conditions') as "a snow tyre whose tread pattern, tread compound or structure is specifically designed to be used in severe snow conditions and that fulfils the requirements of paragraph 6.4 of this Regulation". Paragraph 6.4 refers to a performance requirement of the tyre based on a snow performance test⁸⁸ defined in Annex 7 of the same Regulation. This definition is applicable for all tyre types (C1, C2, and C3). Tyres fulfilling the performance requirements based on the snow performance test can be labelled with the 3-PMSF (3 Peak Mountain Snow Flake) marking, seen in Figure 18, on the sidewall of the tyre on a voluntary basis. The 3-PMSF marking is also referred to as the "alpine symbol".



Figure 18: Alpine symbol (3-PMSF) used for marking severe use snow tyres according to UNECE Regulation No 177.

Nordic winter tyres

Another category of tyres is the so-called "Nordic winter tyres", which are non-studded tyres designed for ice and wet ice conditions. There are currently no legal definition of Nordic winter tyres, but an ISO standard for an ice performance test is currently being prepared, and is expected to be ready for 2017⁸⁹. The ice performance test is applicable for C1 tyres only.

The test standard was proposed by the "Informal Working Group for Snow and Ice conditions of Tyres" founded in 2012. The ice performance test is a braking test similar to the snow performance test used for severe snow tyres (3-PMSF). The requirement for Nordic winter tyres could be a minimum threshold of the grip performance on ice, since a scaling is not possible due to the low range and level of dispersion of the ice tests⁹⁰. The industry is committed to work on a relevant threshold based, which could be the basis for consumer information on the label. The ice performance test makes it possible to distinguish the Nordic winter tyre (which often have the lowest wet grip values) from other "Severe snow" tyres (which in general terms have middle-range wet grip values), to avoid that wet grip is misleading the consumers in their choice of the best winter tyre. Ninety percent of consumers find it 'important' or 'very important' to have snow grip performance on the label⁹¹.

⁸⁶ STRO, The Scandinavian Tire & Rim organisation (2016), "Winter tyres – download of latest updated lists of winter tyres for cars and trucks". Link: <http://stronordic.com/information-2/winter-tyres/>

⁸⁷ UNECE (2014) Addendum 116: Regulation No. 117, "Uniform provisions concerning the approval of tyres with regard to rolling sound emissions and/or to adhesion on wet surfaces and/or to rolling resistance"

⁸⁸ UNECE (2014) Addendum 116: Regulation No. 117, "Uniform provisions concerning the approval of tyres with regard to rolling sound emissions and/or to adhesion on wet surfaces and/or to rolling resistance" – Annex 7.

⁸⁹ ETRTO and Informal Working Group for Snow and Ice conditions of Tyres "Status of Ice Test Method Development of Tyre Industry, ETRTO", Minutes from workshop held December 4th 2014

⁹⁰ Michelin (2015), "Background information on snow and ice tyres", received on meeting October 20 2015, Viegand Maagøe offices, Copenhagen.

⁹¹ Consumer survey with C1 end-users in selected European Countries, Viegand Maagøe, fall 2015. See Appendix 1.s

Since winter conditions vary a lot throughout Europe, different types of snow tyres (snow, severe snow, and Nordic winter) are appropriate for different geographical areas. Hence, a separation into the severe snow tyre category and the Nordic winter tyre category can help the users choosing the best snow tyre for their specific use conditions. Nordic winter tyres have a dominant position in the Nordic countries, representing 75 % in Sweden, 90 % in Finland and 95 % in Norway of the studless winter tyre segment for C1 tyres.

Overview of snow tyre definitions and tests

An overview of the snow tyres used in Europe is given in Table 23. The market shares of the different snow tyre types are based on ETRMA data for C1 tyres from 2010. The total number of C1 tyres sold in 2010 was 257 million. It is important to notice that the studded tyres is a subgroup to the Nordic winter tyres.

The market share of winter tyres shown in Table 23 are aggregated European numbers, but the results from the C1 user survey shows that the share of car owners who have winter tyres for their car range from 8 % in some countries to 80 % in others. In a number of countries, use of winter tyres is mandatory part of the year⁹².

Table 23: Types of snow and ice tyres and their market share of the entire tyre market in 2010. Nordic tyres is a subgroup of 3-PSMF tyres and studded tyres is a subgroup of Nordic tyres.

Definition	Requirement	Scope	Market share in EU (2010)
Snow tyre (M+S)	None – Manufacturer declaration	C1, C2, C3	Unknown
Severe snow tyre Alpine (3-PMSF)	Snow performance test (UNECE 117)	C1, C2, C3	58.8 mill. 22%
STRO list	M+S and/or 3-PMSF and approved by STRO	C1, C2, C3	Unknown
Nordic winter tyres (studless)	ISO standard under way for ice performance test	C1	5.1 mill. 2%
Studded tyres	FI, NO, SE: restricted amount of studs and road wear		3.5 mill. 1%

5.1.3 Including snow and ice grip in the labelling scheme

Based on the above considerations it is suggested to adopt the 3-PMSF and the forthcoming ice grip logo in the tyre labelling scheme to help end-users make a better informed choice when purchasing tyres. Since the variation between the worst and the best performing tyres is too small for division of the tyres into a performance scale (A –G) regarding both snow and ice grip, a threshold performance indicated by a pictogram on the label seems to be the most suitable option. It is important that the indications of snow and ice grip performances be based on tests and not solely on a manufacturer declaration of the tyre properties. Market surveillance authorities from Germany, however, have raised their concerns regarding including snow and ice grip performance in the label. They argue that it is more important to deal with the uncertainty of the wet grip test first, rather than adding any new parameters.

The 3-PMSF and ice grip logos should not replace the wet grip scale, but be a supplementary marking applicable for severe snow tyres. Wet grip will still be an important safety parameter for all tyres, since the driving conditions in most European countries will imply driving a large part of the time on asphalt, even in the winter season. The snow and ice grip performance

⁹² European Commission (2015), "Winter tyres – calendar and other mandatory conditions", Link: http://ec.europa.eu/transport/road_safety/observatory/doc/wintertyres_rules.pdf

should be applied on a voluntary basis to necessitate only testing of tyres designed for winter conditions. However, it could be feasible to add a mandatory requirement, in case the symbol is shown on the sidewall. Hence, it is still voluntary whether to apply the test standard on the tyre, but if it is done, and the 3-PMSF is used on the sidewall, it could be mandatory to add it also to the label.

For snow grip performance, the most optimal solution is to use the existing 3-PMSF test and logo, which represents the tyre performance according to a threshold. The 3-PMSF currently used as marking on the tyre sidewall is applicable for all tyre types (C1, C2, C3), and is already widely used in the tyre industry and recognised by end-users. It is therefore considered less costly to implement in the tyre labelling scheme. Showing the 3-PMSF logo on the label would give the end-users the same level of information as today. However, the information will be more visible compared to the Alpine symbol currently only being present at the tyre sidewall, and differentiate it from the M+S marking, which is not placed on the label. It should be noted, that the alpine-labelled tyres span tyres with different marketing terms such as "winter tyres", "all season tyres" and "Nordic winter tyres", which can all be marked with the alpine symbol on the sidewall. Hence, the logo is not enough alone to distinguish between these product categories, but it will ensure the end-user a tyre that lives up to the 3-PMSF threshold in snow grip performance.

Results from a user survey carried out by IPSOS on behalf of Goodyear in 2015 showed that 39 % of C1 end-users in continental Europe and 29 % in the Nordics recognised the 3-PMSF symbol. The survey also showed that a majority of those recognising the symbol properly knew its meaning.

For "Nordic winter tyres" the expected ISO standard on ice grip performance in combination with a threshold of performance and a pictogram currently under development, seems to be the optimal solution. It is suggested to include this pictogram in the labelling scheme in addition to the snow grip performance to provide a differentiation between "Nordic winter tyres" and the 3-PMSF labelled C1 tyres. This will allow consumers to choose the optimal tyre for their specific driving conditions.

While including snow and ice performance pictograms in the labelling scheme would allow consumers, especially in the Nordic countries, making better, informed choices when purchasing tyres, there is a need to ensure that the pictograms are not misleading consumers in the rest of Europe. It is therefore of importance that consumer awareness campaigns are carried out to ensure that consumers understand the new pictograms and how to use them making an informed choice according to their individual needs.

Label design

As mentioned above it is suggested to place snow and ice performance pictograms on the tyre label of C1 tyres, snow performance pictogram on labels of C2 tyres, and for C3 tyres, which do not carry the sticker, the information should be shown in the technical promotional material. For C2 tyre labels, only the snow performance (3-PMSF) pictogram is relevant, whereas both snow and ice performance pictograms are relevant for the C1 tyre label. For all tyre types the pictograms should be shown where relevant to make the label information language-neutral, which is important for consumer understanding.

Regarding the exact design of the C1 tyre label with the snow and ice performance included, a thorough assessment should be conducted to ensure the best user understanding of the label. It is important to determine which information elements in the tyre label are most relevant and understandable for end-users and how the information is communicated in the best way. It is

important that the inclusion of snow and ice grip performance does not lead to confusion, and it is therefore important to investigate how the pictograms would affect consumers' choice of tyre throughout Europe. The pictogram for ice grip is not yet determined, but it is important that the symbol reflects grip performance, which is why some stakeholders oppose the "ice skate" symbol, since in their opinion it reflects gliding on ice rather than gripping. One of the questions that has been raised in this study is the number of pictograms to be allowed on the tyre label for C1 tyres. Hence, if a C1 tyre that performs within both the 3-PMSF and the ice threshold should have both, or only one of the pictograms. The various options are shown in Figure 19.

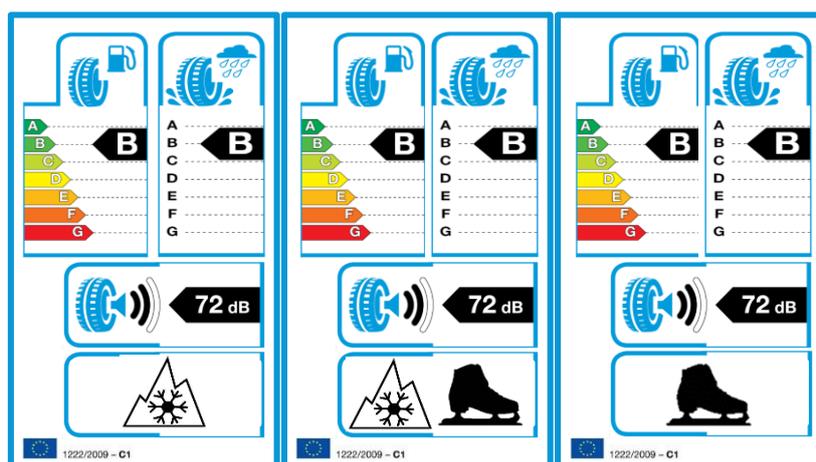


Figure 19: (Left) Snow tyre label, (Middle) Ice tyre label 1, (Right) Ice tyre label 2. Note that wet grip class 'B' for a "Nordic winter tyre" is not realistic, and this is just an illustration of a possible label layout.

According to an IPSOS survey performed on behalf of Goodyear⁹³, adding two logos on the label (one for snow performance and one for ice performance) will confuse the consumers. An example of such a label is shown in Figure 19 in the middle. In this case, 50 % of the users in continental Europe would wrongly buy an ice tyre, which is not fit for central European conditions due to the rubber compound. 86 % percent of consumers in the Nordic countries would choose the ice tyre. If only one logo was added to the label either the 3-PMSF or the Ice tyre logo as seen to the left and right in Figure 19, 74 % of central European consumers would choose the snow tyre, and 68 % of Nordic consumers would choose the ice tyre. It is the belief of VTI that a tyre that pass the ice grip threshold in general would have no problem passing the 3-PMSF threshold⁹⁴. It is not certain, however, whether a Nordic winter tyre will perform as well in milder conditions above freezing point and with wet snow, as a tyre designed for the specifically.

Another design parameter that has been raised is whether so-called "summer tyres" should be recognisable from different types of "winter tyres" ("All season", MS and 3-PMSF) through a "summer tyre" logo. However, the current lack of a strict "summer tyre" definition makes this difficult. The testing of new label layouts for efficacy with consumers is strongly recommended in recent reviews of the energy labelling of energy related products.

⁹³ IPSOS on behalf of Goodyear (2015), "Consumer Research on Winter Tire Understanding via the EU Tire Label", Assessment of the final research carried out by IPSOS. June 2015.

⁹⁴ Mattias Hjort, researcher at VTI, Statens väg- och transportforskningsinstitut, Sweden (2015), e-mail received November 16th 2015 "SV: Questions regarding winter tyres and the EU tyre label".

5.2 Mileage

Mileage is a common parameter used to express the durability of tyres as a distance in miles or in kilometres. In this study, the term mileage is used for expected tyre lifetime in kilometres. Article 14 of the Regulation 1222/2009 refers to mileage as one of the aspects that has to be considered in the present study.

5.2.1 Factors affecting mileage

The mileage of a tyre is directly correlated to the tyre wear factor (amount of tread material lost per kilometre), which is affected by several other parameters than the tyre itself. In order to assess the possibility of including mileage in the labelling scheme, the factors affecting tyre mileage and wear were identified as listed in Table 24⁹⁵. The factors have been categorised as internal and external, where the internal factors represent inherent characteristics of the tyre, and external factors represent all impacts from the surrounding environment and use.

Table 24: Internal and External Factors affecting tyre wear and subsequently tyre mileage.

Internal factors affecting mileage	External factors affecting mileage
Construction <ul style="list-style-type: none"> - Even ground pressure reduces wear 	Tyre pressure <ul style="list-style-type: none"> - Both under –and over inflation increase wear
Choice of material <ul style="list-style-type: none"> - Influences tyre weight 	Wheel alignment <ul style="list-style-type: none"> - Incorrect alignment increases wear
Tread compound/chemical composition <ul style="list-style-type: none"> - Silica tread reduces wear 	Tyre position <ul style="list-style-type: none"> - Higher wear on the driven axle
Tread depth <ul style="list-style-type: none"> - Thicker tread increases mileage, but might also increase wear rate 	Driving style <ul style="list-style-type: none"> - Turning, high engine torque, acceleration and deceleration all increase wear
Tyre size (radius/width/depth) <ul style="list-style-type: none"> - Larger tyres have larger contact surface and lower ground pressure, which reduces wear 	Road surface (material and texture) <ul style="list-style-type: none"> - Coarser road surfaces can increase wear of up to 100% - Wetness, porosity, maintenance
	Speed and acceleration <ul style="list-style-type: none"> - Higher speed cause higher temperature and increased wear
	Load <ul style="list-style-type: none"> - Higher loads increase wear
	Climate <ul style="list-style-type: none"> - Sunlight (UV), temperature*, ozone and precipitation all affect tyre wear
	Vehicle characteristics <ul style="list-style-type: none"> - Load distribution and weight - Electronic braking systems - Suspension type - Engine power
*The chemical and physical properties of summer and winter tyres are optimized for their appropriate operating temperatures. At low temperatures (under 7°C), summer tyres wear more quickly. The same applies to winter tyres used at high temperatures.	

⁹⁵ European Commission, Joint Research Centre (JRC), 2014, Theodoros Grigoratos and Giorgio Martini, "Non-exhaust traffic related emissions. Brake and tyre wear PM", JRC Science and Policy Reports. Institute of Energy and Transport. EUR 26648 EN. ISBN 978-92-79-38302-1 (PDF). European Union, 2014. Link: <http://publications.jrc.ec.europa.eu/repository/bitstream/JRC89231/jrc89231-online%20final%20version%202.pdf>.

No comprehensive studies exist that quantify the influence of each factor, however, there is a general agreement among stakeholders that the external factors have high influence compared to the internal factors. Information from ETRMA has indicates that the user behaviour more than anything is determining for the tyre lifetime, with the internal factors playing a smaller, but not necessarily negligible role.

According to the C1 end-user survey (Figure 20), 38 % of car owners rate mileage as “very important” for their choice of tyres. This is less than for the wet grip (62 %), but higher than for fuel efficiency (34 %), which indicates that including mileage in the Tyre Labelling Regulation would add value to customers, and that it is a parameter that might affect C1 users’ choice of tyres. A survey including C3 end-users (fleet operators) from 2013 shows that the mileage is even more important for fleets with 86 % indicating that they would like to have wear information in the labelling scheme⁹⁶.

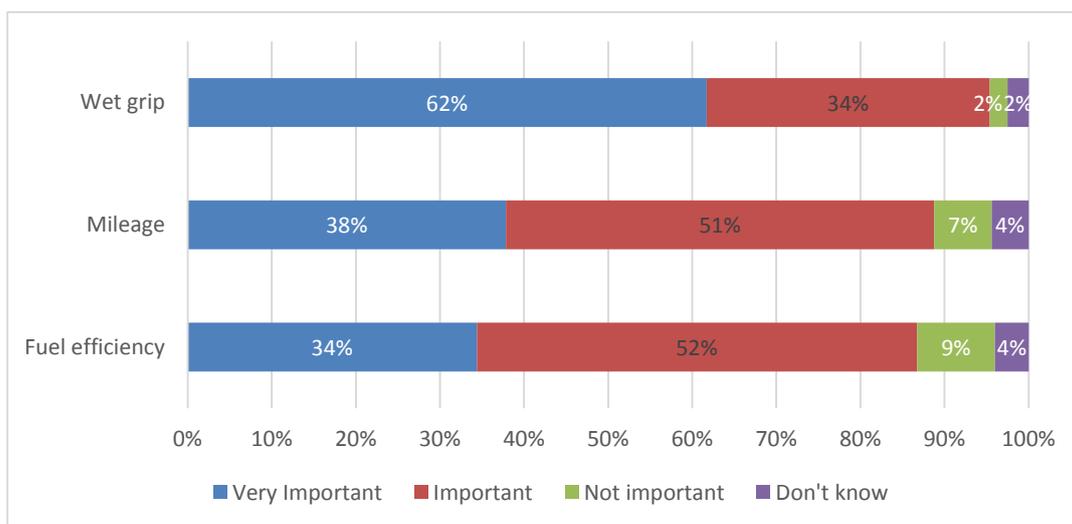


Figure 20: C1 end-user rating of fuel efficiency, mileage and wet grip importance

5.2.2 Test standards for mileage

No European test standard exists for measuring the mileage of tyres. However, the National Highway Traffic Safety Administration, NHTSA, in the United States have made a suggestion for including tyre duration⁹⁷ on an American tyre label⁹⁸ based on test methods laid out in the Uniform Tire Quality Grading, UTQG⁹⁹ for measuring tread wear. The UTQG tread wear test does not provide an expected mileage directly, but rather uses a numerical index of how well a tyre wears in comparison to a reference tyre, more specifically a percentage of the NHTSA nominal tread wear value¹⁰⁰. If the candidate tyre is graded 100 the tread wears with the same rate as the reference tyre, if it is graded 200 the tread wears with half the rate and is thus expected to last for twice as long as the reference tyre.

⁹⁶ MV2 Conseil on behalf of Goodyear (2013), Truck fleet survey with around 500 truck fleets from France, Germany, Italy, Poland and Spain. Link: http://www.fleetfirst.eu/ff_home_en/news/goodyear-fleet-survey-reveals-growing-influence.jsp

⁹⁷ U.S. Department of Transportation and National Highway Traffic Safety Administration, “Federal Motor Vehicle Standards and Regulations”, Link: <http://www.nhtsa.gov/cars/rules/import/FMVSS/>
 United States Department of Transportation (2009). “NHTSA proposes consumer-friendly tire efficiency labelling”. June 19 2009. Link: <http://usdotblog.typepad.com/secretarysblog/2009/06/nhtsa-proposes-consumerfriendly-tire-efficiency-labeling.html#.VfqzvxHtmko>

⁹⁹ National Highway Traffic Safety Administration, NHTSA, “§575.10449 CFR Ch. V (10–1–11 Edition). Authenticated U.S. Government Information. Link; <https://www.gpo.gov/fdsys/pkg/CFR-2011-title49-vol7/pdf/CFR-2011-title49-vol7-sec575-104.pdf>

¹⁰⁰ National Highway Traffic Safety Administration, NHTSA, “§575.10449 CFR Ch. V (10–1–11 Edition). Authenticated U.S. Government Information. Link; <https://www.gpo.gov/fdsys/pkg/CFR-2011-title49-vol7/pdf/CFR-2011-title49-vol7-sec575-104.pdf>

There are several barriers to use the UTQG tread wear test on the European Tyre label. First, the tyre wear grade is calculated based on a control tyre that is tested simultaneously with the candidate tyre, hence resulting index cannot be used to compare durability of tyres of different widths and diameters, or from different suppliers. This would somewhat undermine the purpose of implementing it in the tyre labelling scheme.

Second, the test lacks reproducibility. This is due to both extrapolation of tread wear in the 7,200-mile test to tyre lifetime tread wear, and the large influence of external factors. As noted by NHTSA in the UTQG standard "The relative performance of tyres depends upon the actual conditions of their use, however, and may depart significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate"¹⁰¹.

Third, the UTQG test is performed on a specific 400-mile roadway course in Texas, established by the NHTSA¹⁰². Hence, the test is currently applicable only for American conditions, and should be adapted to European conditions in order to be used in Europe. Also other parameters, such as the vehicle tyres are tested on, are based on American conditions.

Fourth, the UTQG test is associated with high costs, since it entails driving in a convoy for 7,200 miles (11,600 km) and rotating tyre positions and carrying out measurements every 400 miles. Each test costs around 35,000 USD (32,000 EUR)¹⁰³. Up to four different tyre models can be tested in one test run¹⁰⁴. This might very well be a problem for suppliers and especially market surveillance authorities, since the costs of testing current labelling parameters (around 3,500-4,000 Euros) is already a barrier for testing.

For C3 tyres specifically, the ETRMA members report that they collect mileage information to the extent that they are in contact with C3 end-users. The information is received directly from fleets using their tyres, who reports the mileage performance of tyres when they are worn out, and is therefore a real-life measurement of the C3 tyres. This information is used by the individual suppliers to provide mileage information to customers, but only as a relative performance among the suppliers' own tyres without giving absolute numbers.

5.2.3 Scenarios for increased mileage

The estimation of the environmental effect of increasing mileage is based on a lifecycle energy perspective. Estimations of energy savings are made for the three tyre types C1, C2 and new C3 (not retreaded) separately, taking into account the production and waste treatment energy savings compared to the use phase energy.

The estimation is based on a gradual increase in tyre mileage up to a 10 % increase by 2030, "10 % increase" scenario. In the BAU scenario, it was assumed that the current tyre mileage would remain unchanged. Table 25 shows the tyre mileages and assumptions of distance travelled per year, for each vehicle type.

Table 25: Mileage and travel distance assumptions. Numbers are based on Impact Accounting, 2013¹⁰⁵

	C1	C2	C3
Current mileage (BAU)	40,000 km	40,000 km	100,000 km
Mileage by 2030 (10% increase)	44,000 km	44,000 km	110,000 km

¹⁰¹ National Highway Traffic Safety Administration, NHTSA, "§575.10449 CFR Ch. V (10-1-11 Edition)"

¹⁰² National Highway Traffic Safety Administration, NHTSA, "§575.10449 CFR Ch. V (10-1-11 Edition)"

¹⁰³ Desmond Collin (Continental Tyres), e-mail received November 2nd 2015 "Re: cost estimate of tyre mileage test".

And: David Gallegos (IDIADA), e-mail received December 14th 2015, "Re: Updates on UTQG test".

¹⁰⁴ David Gallegos (IDIADA), e-mail received December 14th 2015, "Re: Updates on UTQG test".

¹⁰⁵ Van Holsteijn en Kemna B.V. - VHK (2014), "Ecodesign impact accounting - Part 1, Status Nov. 2013".

Km/year/vehicle	16,000 km	22,000 km	60,000 km
------------------------	-----------	-----------	-----------

It is assumed that the total travelled distances at EU level is similar in both scenarios. The difference between the BAU and the 10 % increase scenario is therefore the tyre stock (Table 26), and hence the tyre sales per year until 2030. When the tyres have higher mileage, less tyres are needed to fulfil the driving need, and hence the stock and the sales are lower. The 10 % increase in mileage until 2030 gives an annual increase in mileage of 0.64 %. The tyre sales would decrease at this same rate. Energy savings arise from the lower production and lower amount of waste tyres (EOL energy).

Table 26: Extract of the adjusted stock model. Stock (number of tyres) in thousands.

(Thousands)	2015	2020	2025	2030
C1	616,808	687,711	763,018	846,571
C2	31,305	35,499	39,386	43,699
C3 - New	21,557	24,354	27,021	29,979

To calculate production and end-of-life energy, which are both measured as MJ/kg tyre, the tyre weights in Table 27 were used.

Table 27: Weight of tyres and scrap tyres¹⁰⁶

	C1	C2	C3
New tyre weight, avg. (kg)	8.6	11.0	62.7
Scrap tyre weight (kg)	7.0	9.4	56.0
Difference (kg)	18%	14%	11%

According to the industry, the approach to increase mileage would not only be to increase the volume (mass and thickness) of the tread, but rather to apply technological innovations such as different rubber compounds. Therefore, it is assumed that the weight of tyres will not change for tyres with increased mileage. According to a review study on waste management of tyres in EU¹⁰⁷, the end-of-life fate for European tyres is distributed as shown in Figure 21.

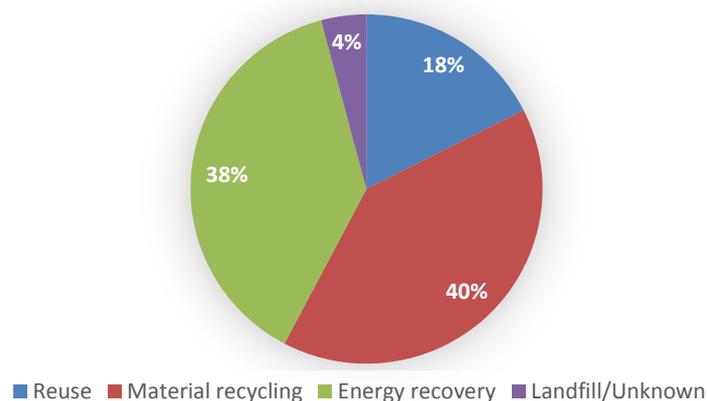


Figure 21: Distribution of end-of-Life fate for European tyres

The energy consumption for each of these end-of-life options are shown in Table 28. The negative sign for tyres used for energy recovery indicates that the scrap is used to produce

¹⁰⁶ Sienkiewicz, et al. (2012), "Progress in used tyres management in the European Union: A review", Waste Management Vol. 32 No. 10 pp 1742-1751, October 2012. Link: <http://www.sciencedirect.com/science/article/pii/S0956053X1200219X>; and: Michelin North America (2016), "Tire Comparison" website. Link: <http://www.michelin.ca/tire-selector/size/215/65/16/false/B/0/compare-tires>

¹⁰⁷ Sienkiewicz et al. (2012), "Progress in used tyres management in the European Union: A review"

energy, which it is credited for, and hence it is subtracted from the life cycle energy, according to the consequential life cycle assessment (LCA) method¹⁰⁸. The reuse of tyres means virgin material production is avoided, which causes energy savings that are credited to the reused tyre life cycle energy. There is still energy consumption related to handling the waste tyres, and therefore only around 1/3 of the production energy of a new tyre can be credited. This is also seen for the Landfill/Unknown fragment, which “costs” 40 MJ/kg due to transport and waste treatment. For material recycling (e.g. rubber grain from waste tyres) the credit and the energy savings almost cancel out.

For production energies an interval of 87-115 MJ/kg tyre were found in the review study by Sienkiewicz et al (2012)¹⁰⁹, and for all calculations the average of this (101 MJ/kg) was used.

Table 28: Average energy assigned per kg scrap tyre for each end-of-life scenario¹¹⁰

New tyre production	101 MJ/kg
Reuse	-33 MJ/kg
Material recycling	3 MJ/kg
Energy recovery	-32 MJ/kg
Landfill/Unknown	40 MJ/kg

Regarding the energy consumption of the tyres in the use phase, the original impact assessment¹¹¹ showed a relation between increasing tread wear and decreasing rolling resistance for selected tyres, but this correlation could not be quantified or generalised. The same is true for wet grip. In the calculation of the increased mileage scenario, it is therefore assumed that neither the rolling resistance nor the wet grip are affected.

5.2.4 Results of increased mileage scenarios

The effect of increasing mileage by 10 % is shown in

¹⁰⁸ European Commission, Joint Research Centre (JRC), 2010, Institute for Environment and Sustainability, “International Reference Life Cycle Data System (ILCD) Handbook - General guide for Life Cycle Assessment - Detailed guidance”. First edition March 2010. EUR 24708 EN. Luxembourg. Publications Office of the European Union, 2010. Link: http://publications.jrc.ec.europa.eu/repository/bitstream/JRC48157/ilcd_handbook-general_guide_for_lca-detailed_guidance_12march2010_isbn_fin.pdf

¹⁰⁹ Sienkiewicz et al. (2012), “Progress in used tyres management in the European Union: A review”

¹¹⁰ Sienkiewicz et al. (2012), “Progress in used tyres management in the European Union: A review”

¹¹¹ European Policy Evaluation Consortium, EPEC (2008), “Impact Assessment study on possible energy labelling of tyres”

Table 29 and compared to the savings obtained by the decreasing rolling resistance in the BAU scenario. The savings related to increased mileage are largest for C1 tyres due to the large sales volume. The relative saving of the mileage increase, compared to savings from RRC, is also largest for C1 tyres, since the yearly distance driven is lowest for C1 vehicles (Table 25).

The total energy savings achieved by a 10 % increase of mileage is below 0.5 % of the total yearly energy consumption of C1, C2 and C3 vehicles in 2030. For comparison, the rolling resistance energy savings in the BAU scenario corresponds to 1.2 % of the annual energy consumption from C1, C2 and C3 vehicles in 2030.

Table 29: Energy savings (TJ/year) from production and end-of-life at 10 % increase in mileage compared to energy savings from RRC in the BAU scenario

TJ savings per year		2020	2025	2030
C1	10% increased mileage savings	8,618	18,710	30,593
	RRC savings (BAU)	18,000	35,149	50,679
	Total savings	26,618	53,859	81,273
C2	10% increased mileage savings	780	1,738	2,801
	RRC savings (BAU)	6,040	12,354	18,902
	Total savings	6,820	14,091	21,703
C3	10% increased mileage savings	2,623	4,632	9,070
	RRC savings (BAU)	10,788	23,351	37,902
	Total savings	13,412	27,983	46,971

The energy savings from increasing tyre mileage are not negligible, especially for C1 tyres, where savings from increasing mileage correspond to 38 % of the annual energy savings in 2030. In total (for C1, C2 and C3 tyres), the energy savings from mileage would comprise 28% of total savings in 2030, as shown in Figure 22. The results, however, are based on the very uncertain assumption that the rolling resistance does not change. It is not possible to say how, or to what extent, the increased mileage will affect rolling resistance, but it is unlikely that it will not change at all. Since the savings from increasing mileage is smaller than those of decreasing rolling resistance, even slightly higher RRC (induced by increasing mileage) will be enough to offset the potential mileage savings.

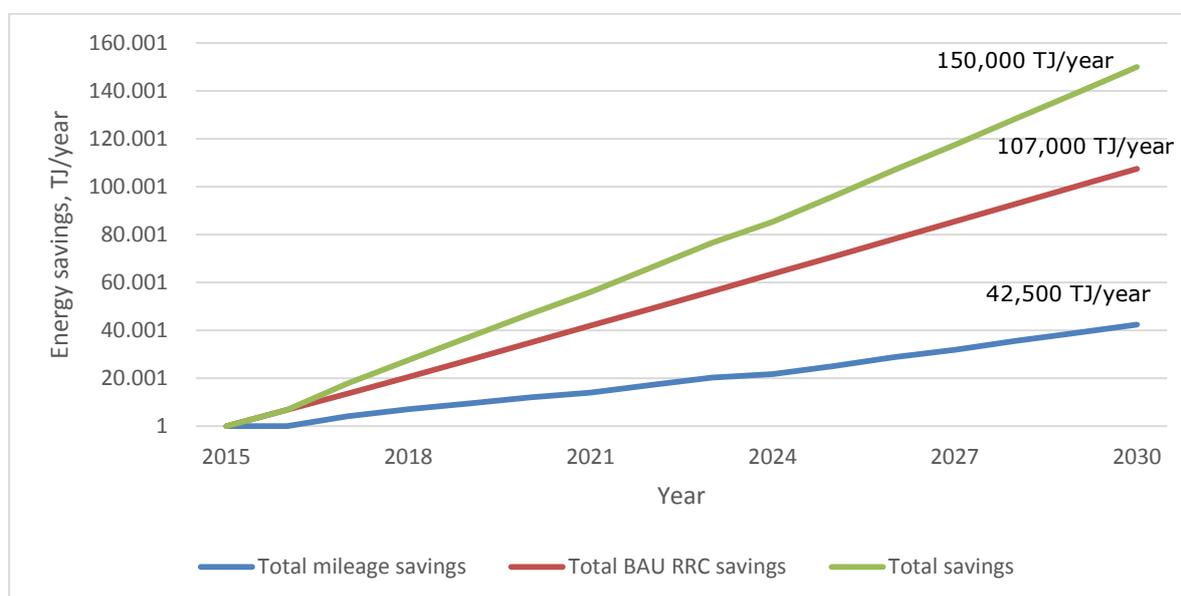


Figure 22: Energy savings from increasing mileage 10%, compared to energy savings from decreasing RRC in the BAU scenario

However, energy is not the only environmental reason to increase the mileage of tyres. The solid waste amounts generated by end of life tyres (ELTs) is also an important factor. Increasing the lifetime of tyres would increase the intervals of which they are replaced, and hence reduce the waste amounts. Table 30 shows the estimated waste reductions of the increased mileage scenario. The results show that this would lead to around 10 % less ELTs by 2030, when the tyre mileage is increased by 10 %.

Table 30: savings in ELT waste amounts in tonnes and percent for the increased mileage scenario

	2020	2025	2030
Total waste savings, ton	95,811	184,318	314,164
Percent waste savings	4%	7%	10%

5.2.5 Conclusions on mileage

Based on the considerations above, it is not recommended to include mileage as a performance parameter in the tyre labelling scheme. This is a combination of the lack of a reproducible test method and the uncertainty of the environmental impact.

The large effect of external parameters on the tyre mileage undermines the reproducibility of any current test standard. Using highly uncertain mileage estimations in the labelling scheme poses a large risk that the predicted mileage is not achieved in real life. This could severely affect end-user confidence in the label in general. Furthermore, it would make it impossible to perform market surveillance.

The uncertainty of how increased mileage would affect the rolling resistance and the wet grip, and the limited environmental benefits, makes it unlikely that including mileage in the labelling scheme would result in actual energy savings.

5.3 Abrasion

Abrasion, which is the removal of materials from the tyre when it interacts with the road surface, contributes to the particle air pollution with the so-called TRWP (Tyre Road Wear Particles). As pointed out in a letter to the European Commission (See Appendix 8)¹¹², the relative importance of TRWP is likely to increase as other air pollution sources such as vehicle emissions are regulated. It should be noted that this chapter only deals with abrasion from non-studded tyres. In the Nordic countries, where studded tyres are used, the studded tyres are regulated specifically concerning the abrasion and road wear (see also Chapter 6.2.3 Conclusions on studded tyres).

5.3.1 Abrasion and particle emissions

Abrasion occurs when the tyre interacts with the road surface, which causes shear stress of the materials, and removes materials from both road and tyre. This removal of materials has been proven to contribute to the particle matter pollution, which is measured as PM₁₀ (particles <10µm) or PM_{2.5} (particles <2.5µm). Due to interaction of tyre and road wear particles, it has proven difficult to distinguish the two sources¹¹³, which is therefore reported collectively as "tyre and road wear particles", TRWP.

The relative contribution of TRWP to traffic related particle emissions is shown in Figure 23, which is based on a literature review from JRC¹¹⁴.

¹¹² The AIR Group, ANEC, EUROCIITIES and Transport & Environment (2015), "Inclusion of additional parameters in the impact assessment study on the EU Tyre Label" Letter addressed to Mr Hodson and Mr Moreno Acedo, DG ENER, may 18th 2015. See Appendix 8.

¹¹³ European Commission, Joint Research Centre (JRC), 2014, "Non-exhaust traffic related emissions. Brake and tyre wear PM" – Page 29

¹¹⁴ European Commission, Joint Research Centre (JRC), 2014, "Non-exhaust traffic related emissions. Brake and tyre wear PM"

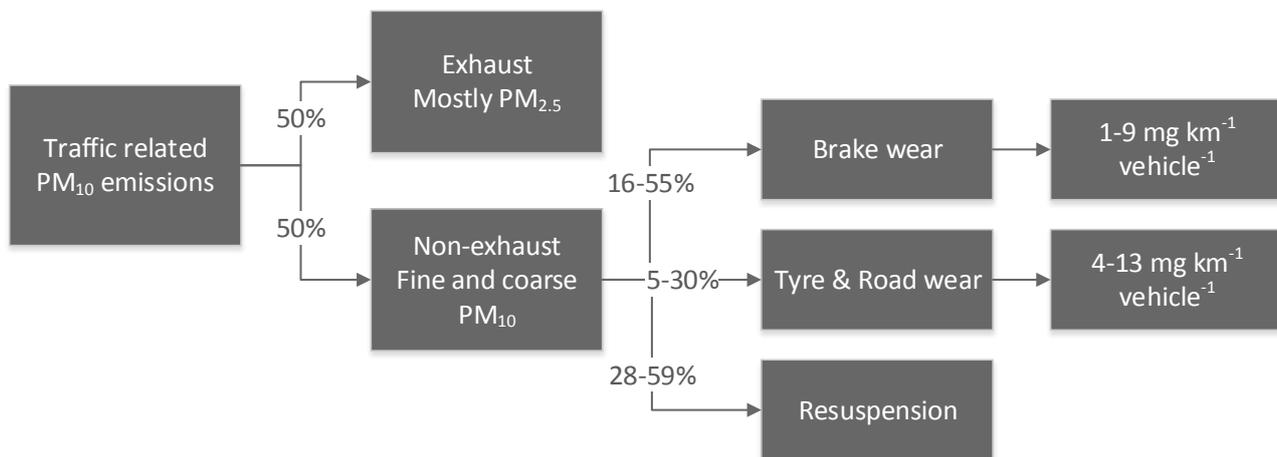


Figure 23: The distribution of airborne traffic related PM_{10} and emissions factors (mg/km/vehicle)

According to the JRC report, the exhaust emissions and non-exhaust emissions contribute equally to the traffic related PM_{10} emissions. It is noted that the relative importance of non-exhaust emissions is expected to increase, since the exhaust emissions are regulated (EC 715/2007), and therefore expected to gradually decrease.

The contribution of TRWP is very uncertain, with estimations varying from 5-30 % of non-exhaust particle emissions, and 0.8-7 % by mass of ambient PM_{10} concentrations¹¹⁵. This is also seen in the emission factors (EFs) reported in literature, which ranges from 4-13 mg/km/vehicle. Besides the type and composition of the tyre itself, the variance in EFs is also influenced by the road surface type, speed and driving conditions¹¹⁶. Furthermore, various modelling and measuring technologies were used to determine the TRWP EFs, contributing to the variance as well.

5.3.2 Test standard for particle emissions

The JRC report shows that many different sampling and measurement methods are used to quantify particle emissions that do not give comparable results. A standard procedure for measuring non-exhaust traffic related particle emissions is needed. For this purpose, ISO standard 14956:2002 on air quality¹¹⁷ has been mentioned as an option by the tyre industry¹¹⁸.

Another option is the measurement method currently being developed by UNECE in the Particle Measurement Programme (PMP)¹¹⁹. In the programme the "normal driving pattern" is investigated, as well as most suitable measuring techniques. The results show that it is still not possible to distinguish particles coming from the tyre and the road surface, and the programme is therefore currently focusing on brake wear emissions¹²⁰.

¹¹⁵ European Commission, Joint Research Centre (JRC), 2014, "Non-exhaust traffic related emissions. Brake and tyre wear PM" – Page 8

¹¹⁶ European Commission, Joint Research Centre (JRC), 2014, "Non-exhaust traffic related emissions. Brake and tyre wear PM" – Page 39

¹¹⁷ ISO (2014), "ISO 14956:2002 Air Quality – Evaluation of the suitability of a measured procedure by comparison with a required measurement uncertainty". Link:

http://www.iso.org/iso/home/store/catalogue_tc/catalogue_detail.htm?csnumber=26036

¹¹⁸ European Tyre and Rubber Manufacturers' Association, ETRMA (2015), "Q&A on PM emissions and Tyre and Road Wear Particles". Brussels, 4 June 2015.

¹¹⁹ UNECE (2012), "Particle Measurement Programme (PMP)" Website. Last edited by Martin Dagan June 2012. Link: <https://www2.unece.org/wiki/pages/viewpage.action?pageId=2523173>

¹²⁰ UNECE, (2016) PMP 38th session, PowerPoint presentation "PMP-38-04 PMP Non_Exhaust_emissions". Link: <https://www2.unece.org/wiki/display/trans/PMP+38th+session>

5.3.3 Environmental impact of Abrasion

Due to the lack of consistent measuring methods, the environmental impact of abrasion is difficult to determine. Not only is the amount of particle emissions from the tyre needed, but also the size distribution since this is an important factor for the human and environmental health. The literature provides no concordant results on this¹²¹.

The chemical composition, which is equally important, is controlled by the European REACH Regulation (Regulation EC 1907/2006), and this aspect is therefore not relevant for the Tyre Labelling Regulation.

Abrasion is related to tyre mileage, since both are linked closely to the tyre wear. Just as for mileage the tyre abrasion depends on many other factors than the tyre itself, such as the vehicle characteristics, the vehicle operation (driving style), and the road surface characteristics (see Table 24). Abrasion is even more closely linked to the nature of the road surface, since the TRWP consist of compounds from both. It is therefore, as noted in the JRC report, not possible to distinguish between particles from the tyre and from the road, and regulating just the tyre wear, while not considering the road surface influence, is therefore futile.

5.3.4 Conclusions on Abrasion

The contribution of TRWP to air pollution is very uncertain¹²², highly dependable on the road surface, and a standardised measuring method has not yet been developed. As with mileage, abrasion depends largely on external factors, and the tyre labelling scheme is not appropriate for regulating the emissions of TRWP, since this cannot be regulated without taking the nature of the road surface into consideration. Furthermore, the chemical content of tyres materials, which are important for the health effects of TRWP, is currently regulated through the REACH Regulation¹²³.

¹²¹ European Commission, Joint Research Centre (JRC), 2014, "Non-exhaust traffic related emissions. Brake and tyre wear PM".

¹²² European Commission, Joint Research Centre (JRC), 2014, "Non-exhaust traffic related emissions. Brake and tyre wear PM".

¹²³ Regulation (EC) No 1907/2006 of the European Parliament and of the Council (REACH Regulation)

6. Inclusion of new tyre types

In this chapter the inclusion of the two new tyre types, retreaded C3 tyres and studded tyres, in The Tyre Labelling Regulation are discussed.

6.1 Retreaded tyres

Tyre retreading is a process used to extend the life of used tyres. When a tyre is retreaded, the worn-out tread is replaced with a new one, which can be repeated as long as the casing integrity is guaranteed. The market share of retreaded C3 is around 30 % in Europe, which corresponds to around 5 million tyres^{124,125}, however a decreasing trend has been seen in the C3 retreaded market from 2013-2015 due to increasing import of low cost C3 tyres. The market share of retreaded C1 and C2 tyres is below 2 % in Europe³⁵. In some markets, i.e. in UK and eastern EU states, the C1 and C2 retreaded tyre market may be a little higher, however in western EU states it is close to zero³⁶. This document only deals with retreaded C3 tyres, for which retreading and regrooving can be complementary strategies to extend the useful life of a tyre significantly.

6.1.1 Retreading process

In the retreading process, the worn tread (No 5, Figure 24) is replaced, reusing the existing casing (No 2, Figure 24). There are two types of retreading processes: The cold process and the hot process. In the cold process, the new tread is pre-moulded and vulcanized into the final shape and then attached to the old tyre casing. The hot process is more similar to the production of new tyres, where the tread compound is applied to the casing and then vulcanized in a tyre mould. The Hot process is higher investment cost for the equipment, and is therefore used mainly by big companies for large volume production¹²⁶. The cold process has lower investment costs and offers greater flexibility for producing small series of tyre in various sizes and designs, and is more widespread between small and medium scale producers.

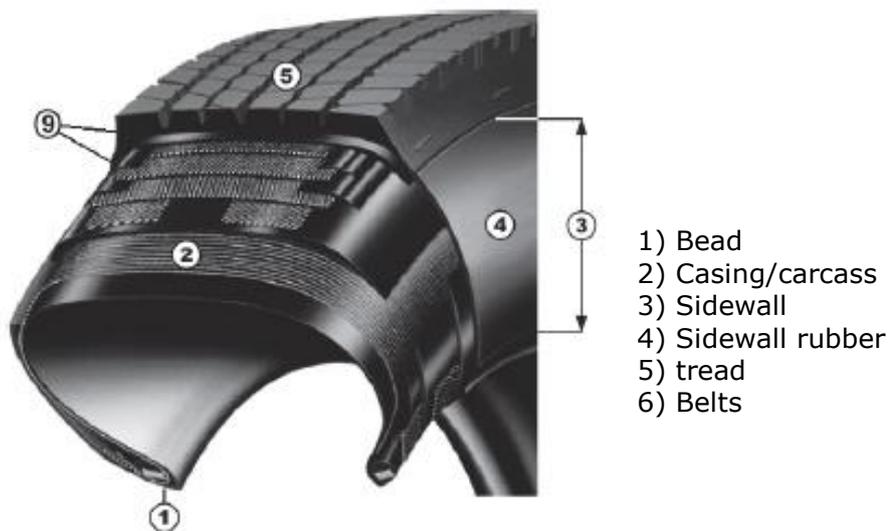


Figure 24: Basic tyre components (figure from ETRMA and ETRTO)

To ensure the quality and safety of retreaded tyres, the UNECE Regulation 109 applies as compulsory conditions for the placing on the market of retreaded tyres in Europe. It contains

¹²⁴ European Tyre and Rubber Manufacturers' Association, ETRMA (2011), "Retreading" Website last updated 2011.

Link: <http://www.etrma.org/tyres/retreading>

¹²⁵ Ruud Spuijbroek, Secretary at Bipaver (2015), personal communication on email September 16th 2015.

¹²⁶ European Tyre and Rubber Manufacturers' Association, ETRMA (2011), "Retreading" Website last updated 2011.

Link: <http://www.etrma.org/tyres/retreading>

requirements on the casing condition, the retreading facility and the retreading process. Due to the innumerable combinations of casing, tread and retreading process, retreaded tyres are difficult to standardise and the Regulation therefore controls the process level rather than the final product. The trucks have at least three axles: front axle, drive axle and trailer axle. Retreaded tyres are used mainly in drive and trailer axles on trucks¹²⁷, but can be used on all axles for e.g. busses¹²⁸.

Some retreaded tyres are sold through fleet solutions, which applies mostly to big C3 fleets, who pay per km driven and has the service of retreading of the original casings included in the price. Usually the fleet solutions include both retreading and regrooving of the tyres. Regrooving is a process where a new tread pattern is cut from the tread rubber, when the old pattern is worn, but sufficient rubber remains to cut a new pattern. For a typical truck tyre¹²⁹ being retreaded twice and regrooved 3 times, the lifetime will be nearly four times that of a new tyre¹³⁰, causing material and energy savings in production and end-of-life processes.

6.1.2 Test standards for retreaded C3 tyres

The performance of retreaded tyres is determined by the combination of casing, tread, and retreading process applied¹³¹. The major challenge of including retreaded tyres in the labelling scheme is the necessity to establish the three label performance parameters (fuel efficiency, wet grip and external rolling noise) for each combination of casing, tread and retreading process. Since retreaded tyres are produced in small series, the cost of testing each combination would make the retreading business economically unfeasible, especially for SMEs¹³². This is why the retreaded tyres were not previously included in the Tyre Labelling Regulation.

ReTyre project

In order to overcome the problem of testing every new combination of retreaded tyres, the partly EU-funded ReTyre project was carried out by a consortium headed by the European independent retread industry¹³³. The goal of the project was to develop an Excel-based tool for calculating all three label performance parameters for retreaded C3 tyres, based on relevant input factors. This would eliminate the need for testing the tyres. During the project, more than a thousand tests (both laboratory and road) were performed in order to establish relationships and correlation between the several components and parameters. Results and analyses led to an algorithm necessary to create the predictive tool, which can be used to calculate the three labelling parameters rolling resistance, wet grip and external rolling noise for retreaded tyres¹³⁴, and was presented at the Global Retread Symposium in 2015¹³⁵.

According to the project leader, it was decided to continue further research after the ReTyre project, which ended in 2014. This was to improve the correlation of the rubber tread compound and the fuel efficiency (RRC) and wet grip performance. A thousand additional tests

¹²⁷ ETRMA (2015), "Phone meeting with ETRMA, ETRTO and Commission on retreading". Attendants: Fazilet Cinaralp (ETRMA), JC Noirhomme (ETRTO), Jean-Dominique Perrot (Michelin), Francesca de RSI (Pirelli), Gianluca Tosatti (Bridgestone), Juan Moreno Acedo (DGENER). Held November 13th 2015.

¹²⁸ Ruud Spuijbroek, Secretary at Bipaver (2015), personal communication on email September 16th 2015.

¹²⁹ (315/80 R22.5 truck tyre weighing 70kg with a 15kg tread)

¹³⁰ European Tyre and Rubber Manufacturers' Association, ETRMA (2015), "ETRMA Position paper on circular economy – Bringing about a resource efficient and competitive Europe". Brussels, September 2015. Link:

http://www.etrma.org/uploads/Modules/Newsroom/2015-09-29_etrma-position-paper-on-circular-economy_vf.pdf

¹³¹ Boustani, A. (2007), "Remanufacturing and Energy Savings" B.S. University of California Berkely, Massachusetts Institute of Technology. Link: <http://web.mit.edu/ebm/www/Publications/reman-est.pdf>

¹³² Retyre (2014), Main website. Link: <http://www.retyre-project.eu/>

¹³³ Ruud Spuijbroek, Secretary at Bipaver (2015), personal communication on email September 16th 2015

¹³⁴ Ruud Spuijbroek, Secretary at Bipaver (2015), personal communication on email September 16th 2015

¹³⁵ <http://www.moderntiredealer.com/news/411298/global-retread-symposium-u-s-retreaders-are-not-alone-in-dealing-with-tier-4-imports> and Presentation "Global Retread Symposium 2015 Predictive tool", presented by Bipaver, Las Vegas, November 4th 2015.

were performed to upgrade the predictive tool, which resulted in 95 % accuracy of the calculated results compared to the actual test results, in the beta version¹³⁶.

The formal ownership of the predictive tool lies with Stichting Kenniscentrum Leiden, executing the Bipaver secretariat and on behalf of Bipaver, and the SME-Associations participated in the project, have the IPR (Intellectual Property Rights). During the last General Assembly of Bipaver in May 2015, it was decided that the maintenance of the tool and its database, performing of additional testing in the future, updating the algorithm and the web-based tool, would be the responsibility of a separate legal body, where the relevant SME-Associations will be shareholders. Furthermore, it was proposed that the Steering Committee, active in the ReTyre Project would have an important technical and managerial role. Consequently, the predictive tool will also be marketed and made commercially available for non-EU retreading facilities¹³⁷.

There are opposing opinions in the industry of whether or not the ReTyre tool is accurate enough and includes all relevant parameters for calculating the label performance parameters for retreaded C3 tyres. According to Bipaver, much of the doubt arises from analysis of the now outdated alpha-version of the tool. One of the opposing views raised by ETRTO and ETRMA, is that the casing have more influence on the rolling resistance, than what is assumed in the ReTyre tool. ETRTO tested rolling resistance of casing without tread and after retreading, to measure the influence. The conclusion was that the casing alone has the ability to spread the rolling resistance result over three label categories.

However, the testing methods used by ETRTO to obtain these results are doubted by other organisations, e.g. Bipaver and Bandvulc tyres. For instance, the fact that the tyres were tested after buffing but prior to retreading gives rise to questions regarding the credibility of the results. In the tests made for the ReTyre programme by IDIADA on an aligned drum, it was shown that when matching different casings with different tread compounds, the rolling resistance was in every case largely determined by the tread¹³⁸.

A possible solution to clear out the oppositions within the industry is to make a thorough assessment of the results of all available studies. The assessment works should involve all relevant stakeholders such as tyre industry, retreading companies, Member States, MSA's and relevant NGO's.

US EPA low rolling resistance verification

Another approach to tackle the immense testing load has been taken by the US EPA. This approach applies to the rolling resistance only, and tyre suppliers can get retreaded tyres verified by testing and demonstrating that a retreaded tyre model has a rolling resistance coefficient at or below prescribed target values¹³⁹. This does not yield a scalable result (i.e. the A-G scale), but allows suppliers to state that the tyre is a "low rolling resistance retread".

In the test US EPA process three new Yokohama tyres of a specific model and size are buffed and retreaded under "worst case" (temperature and time) conditions. The rolling resistance is tested using the ISO 28580 standard¹⁴⁰ (also used in UNECE Regulation 117). The average

¹³⁶ Ruud Spuijbroek, Secretary at Bipaver (2015), personal communication on email September 16th 2015

¹³⁷ Ruud Spuijbroek, Secretary at Bipaver (2015), personal communication on email September 16th 2015

¹³⁹ United States Environmental Protection Agency, office of air and radiation (2012), "EPA Verified Low rolling Resistance tires Interim Performance Requirements for R-tread Products Effective June 11, 2012", Link: <http://www3.epa.gov/smartway/forpartners/documents/verified/retread-perform-req.pdf>

¹⁴⁰ ISO (2009), "ISO 28580:2009 – Passenger car, truck and bus tyres – methods for measuring rolling resistance – single point test and correlation of measurement results". Link: http://www.iso.org/iso/catalogue_detail?csnumber=44770

rolling resistance result must be below the prescribed target values to get an EPA verification. By specifying the casing to be used beforehand, the influence of this variable is removed from the test results. The US EPA rolling resistance verification solution provides the fuel savings related to low rolling resistance tyres, but does not take into account the effect on wet grip and rolling noise.

6.1.3 Scenarios for including retreaded C3 tyres

The assessment of the environmental effect of including retreaded C3 tyres in the labelling scheme is based on a stock model of retreaded C3 tyres seen in Table 31. In the stock model, it is assumed that the retreaded C3 market will continue to decrease, and then stabilise at 20% market share. This is based on the decreasing trend observed in the last 3-5 years¹⁴¹, and the sales numbers have accordingly been adjusted to exempt the 2 % growth rate expected for the tyre replacement market in general (see also Table 19). In the stock model, it was assumed that the tyre lifetime was the same for retreaded as for new C3 tyres.

Table 31: Extract of the tyre stock model, number of tyres in thousands, retreaded vs new C3

(Thousands)	2010	2015	2020	2025	2030
C3 - Retreaded	8,739	7,688	7,208	6,846	7,495
C3 - New	18,717	21,557	22,354	27,021	29,979
Retreaded share	32%	26%	23%	20%	20%

It is important to note the assumption that the sales (and stock) of retreaded C3 tyres is not expected to change whether retreaded tyres are included in the labelling scheme or not. The only changes expected are in the labelling performance parameters; Fuel efficiency, wet grip and external rolling noise. This entails that energy savings in the production and end-of-life phases are not included in the scenario calculations, since they do not differ from the BAU scenario. Only if inclusion of retreaded C3 tyres in the labelling scheme changes the sales volume compared to the BAU scenario, will increased energy savings in production and waste treatment be achieved.

The energy saving calculations are based on the expected decrease in RRC for retreaded C3 tyres if they are included in the labelling scheme, i.e. energy savings are only related to the use phase. According to the organisation Bipaver¹⁴², retreaded tyres can obtain the same average performance as new tyres. In the scenario, it was therefore assumed that the average RRC of retreaded tyres if included in the labelling scheme would follow the same linearly decreasing trend as new C3 tyres. However, since the retreaded tyres so far is not included, it is expected that the RRC was higher in 2015 for retreaded tyres than for new. The wet grip and external rolling noise development is based on the same assumptions.

6.1.4 Results of retreaded C3 inclusion

The forecasts of the three labelling parameters for retreaded C3 tyres are summarised in Table 32, Table 33, and Table 34. In the tables the development of new C3 tyres in the BAU scenario are compared to the development of retreaded C3 tyres in the "C3 – Retreaded inclusion" scenario. Since the same rate of change is assumed in the retreaded C3 inclusion scenario as for new C3 tyres, the retreaded tyres will continue to have a slightly lower performance.

¹⁴¹ European Tyre and Rubber Manufacturers' Association, ETRMA (2016), "European Tyre & Rubber Industry; Statistics Edition 2015". Link: <http://www.etrma.org/uploads/documents/Statistics%20booklet%20-%20edition%202015.pdf>

¹⁴² Bipaver is the representative of the European Independent retread industry and acts as umbrella organisation, where national organisations are represented. If such associations does not exist in Member States, Bipaver is open for individual memberships.

As seen from the tables, it is expected that the performance of retreaded C3 tyres will not change if they are not included in the labelling scheme, i.e. in the BAU scenario for retreaded tyres. It should be noted, that in this approximation the “spill-over” effect from the new to the retreaded C3 market is neglected, i.e. the inherent improvement of retreaded C3 tyres that comes from improved casings and technology development of new C3 tyres.

Table 32: RRC development for the scenario of including retreaded C3 tyres in the labelling scheme

RRC (kg/ton)	Average 2015	Average 2030	Change rate
C3 – new BAU	6.13	5.69	-0.5 % pa
C3 – Retreaded inclusion	6.19	5.75	
C3 – Retreaded BAU	6.19	6.19	0 % pa

Table 33: Wet grip development for the scenario of including retreaded C3 tyres in the labelling scheme

Wet grip index	Average 2015	Average 2030	Change rate
C3 – new BAU	1.06	1.14	0.51 % pa
C3 – Retreaded inclusion	1.05	1.13	
C3 – Retreaded BAU	1.05	1.05	0 % pa

Table 34: External rolling noise development for the scenario of including retreaded C3 tyres in the labelling scheme

Noise (dBA)	Average 2015	Average 2030	Change rate
C3 – new BAU	71.71	68.21	-0.33 % pa
C3 – Retreaded inclusion	72.19	68.66	
C3 – Retreaded BAU	72.19	72.19	0 % pa

Based on the rolling resistance improvements in Table 32, the yearly energy savings from retreaded tyres was calculated. These are seen in Figure 25 along with the yearly energy savings in the BAU scenario obtained from decreasing rolling resistance of new tyres (C1, C2 and C3). The savings in the BAU scenario for retreaded tyres is zero, since there is no change in RRC.

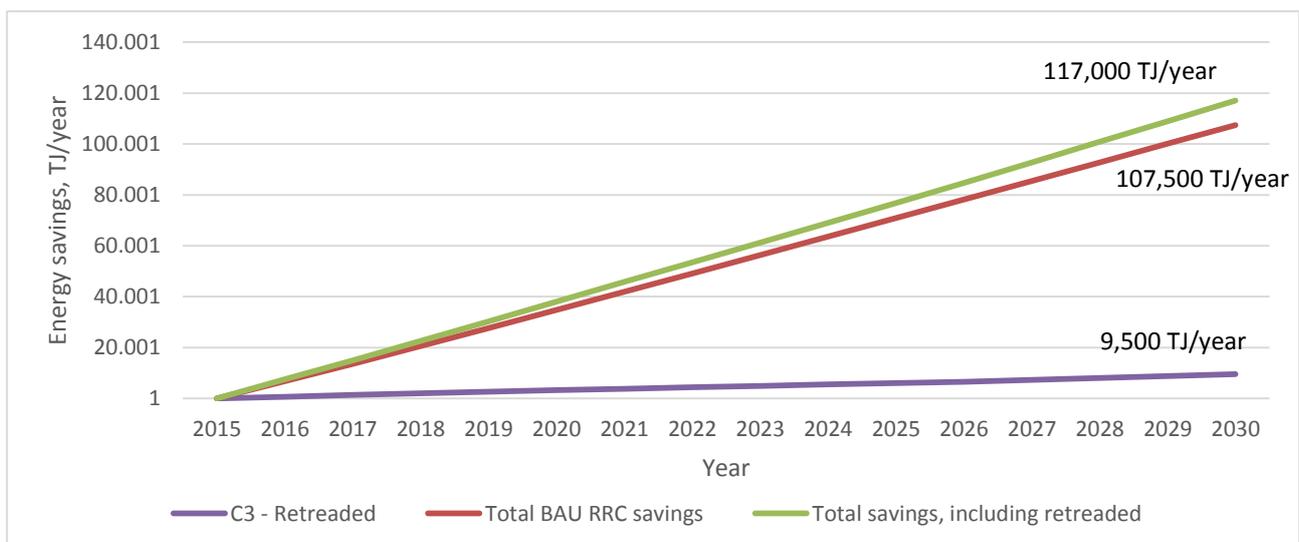


Figure 25: Yearly energy savings in TJ of decreasing RRC of new tyres and retreaded C3 tyres

The relatively large market share of retreaded tyres on the C3 market (20-30 %) ¹⁴³ results in an equally large fuel saving potential through decreasing rolling resistance. In total 9,500 TJ/year could be saved in 2030 by including retreaded C3 tyres in the tyre labelling scheme, compared to not doing so. Hence, by including retreaded C3 tyres, it is estimated that 117,000 TJ/year could be saved in total in 2030 (Figure 25). For comparison, an energy saving of 38,000 TJ/year is expected in 2030 from decreasing the rolling resistance of new C3 tyres.

6.1.5 Current savings from retreaded tyres

Even though production energy was not included in the above scenario, it should be noted that the production savings related to using retreaded tyres is significant. The production savings are already being realised with the current use of retreaded tyres. In Table 35, the production savings from using retreaded compared to only new C3 tyres is illustrated. In the calculation example, it is assumed that a tyre that is retreaded twice and regrooved three times has four times the lifetime of one new C3 tyre ¹⁴⁴. The materials and CO₂ emissions from tyre production is based on numbers from an information sheet by the ReTyre project ¹⁴⁵.

In the Retreaded production material calculations, it is included that the first “lifetime” will be as a new tyre. In total raw material savings of more than 60 % and CO₂ savings of 66 % is realised by using retreaded tyres compared to only using new tyres.

If the sale of retreaded tyres increases, the production energy and material savings will increase as well, compared to the current situation, whereas a decrease in retreaded market share will cause decreasing energy savings. However, there is a limit to the number of retreaded C3 tyres, since they require that casings of sufficient quality are available.

Table 35: Energy savings for new and retreaded C3 tyres in the production phase

	C3 – New	C3 – Retreaded	Savings	%-Savings
Petroleum	400 L	160 L	240 L	60 %
Other raw materials	240 kg	90 kg	150 kg	63%
CO ₂ emissions	880 kg	298 kg	582 kg	66 %

Retreading of used casing will not only cause material and energy savings in the production phase, but also reduce the amount of tyre waste. Furthermore retreading contributes to the concept of circular economy by using the “waste” of one product (the casing) as raw material for a new product. This an approach to manage future scarcity of raw materials and ensure efficient use of resources.

6.1.6 Conclusions on retreaded C3 tyres

Retreaded C3 tyres should only be included in the labelling scheme if a system or tool that is technically and economically feasible, accurate enough and includes all relevant parameters for calculating the label performance parameters, can be found. In addition, the continuous maintenance and availability of the tool should be secured. The availability of the current predictive tool for retreaded tyres should be clarified and it should be ensured that it does not affect free competition in the retreading market. It is proposed to follow these issues to clear out the identified technical oppositions among stakeholders.

¹⁴³ European Tyre and Rubber Manufacturers’ Association, ETRMA (2016), “European Tyre & Rubber Industry; Statistics Edition 2015”. Link: <http://www.etrma.org/uploads/documents/Statistics%20booklet%20-%20edition%202015.pdf>

¹⁴⁴ European Tyre and Rubber Manufacturers’ Association, ETRMA (2015), “ETRMA Position paper on circular economy – Bringing about a resource efficient and competitive Europe”

¹⁴⁵ VACO, Trade association for the tyre and wheel sector and ReTyre project, “Retreaded tyres – First choice”, Netherlands, 2015. Link: http://www.better-tyres-now.eu/wp-content/uploads/2016/03/VernieuwdeBanden_ENG-final-LR.pdf

The energy calculations show that there is a large fuel saving potential by including retreaded C3 tyres in the labelling scheme and thereby ensure decreasing rolling resistance for retreaded tyres as well as for new tyres. However, the calculated savings does not take into account the possible spill over effect from the new C3 technological development. A large part of the energy savings related to retreaded tyres lies in the production phase, and the reuse of casings is in line with the idea of circular economy.

Including retreaded C3 tyres in the labelling scheme would provide end-users with necessary information to avoid trade-offs between purchase price and TOC (Total Cost of Ownership). Retreaded tyres are generally cheaper than new tyres of similar quality, with around 35-50 % lower purchasing price¹⁴⁶. However, if the rolling resistance, and hence fuel consumption, is higher, it could offset the advantage in purchase price due to a higher TOC. Including retreaded tyres in the Labelling Regulation would minimise the risk of higher TOC through information.

6.2 Studded tyres

Studded tyres is a subgroup of Nordic winter tyres developed for sub-zero temperatures and ice and wet ice conditions. Only studdable tyres supplied without studs are currently covered by the Tyre Labelling Regulation. Studded tyres are primarily used in the Nordic countries (Finland, Sweden and Norway), where the market share is 25 % on average of the C1 tyre market¹⁴⁷, and more than 50 % of car owners in Sweden and Finland have studded tyres for their car¹⁴⁸. In the rest of the EU, the market share of studded tyres is around 0.25 % (in 2010)¹⁴⁹. In many Member States, the use of studded tyres is prohibited and in most others, the use is restricted to a few months of the year, in the winter season.

6.2.1 Testing of studded tyres

Testing rolling resistance and wet grip for studded tyres is not possible with the current test standards. In both the RRC and the wet grip tests there are a limited allowed roughness of the surface (road or machine drums), and the use of studs on these surfaces during the test will damage them to an extent that the surfaces no longer comply with the test standards. Hence, with the current test standards, including studded tyres is not possible.

If new test standards were developed for studded tyres specifically, the results would not be directly comparable to those of non-studded tyres, and there would be a large risk of misinformation, if comparisons were attempted on the same scales.

Since the test standards referred to in the Regulation cannot be used for testing studded tyres, the only data available regarding their performance is from tests made by independent organisations following approximations of the test standards. One such test is from the Finnish magazine Tekniikan Maailma¹⁵⁰ (English: World of Technology), who did a test of studded vs. non-studded "winter tyres". The only two areas where studded tyres performed significantly worse than non-studded tyres were on noise (experienced by the driver as opposed to external rolling noise on the label) and the fuel economy, which is shown in Table 36. However, for all tests on asphalt (wet or dry), studded tyres cause a high degree of road wear.

¹⁴⁶ VACO, Trade association for the tyre and wheel sector and ReTyre project, "Retreaded tyres – First choice", Netherlands, 2015. Link: http://www.better-tyres-now.eu/wp-content/uploads/2016/03/VernieuwdeBanden_ENG-final-LR.pdf

¹⁴⁷ Lennart Lomaeus, chairman of DFTF Sweden (Swedish Tyre, Rim & Accessories Suppliers Association) (2015), Presentation: "Winter tyre Market's segments evolution in the Nordic countries"

¹⁴⁸ Consumer survey with C1 end-users in selected European Countries, Viegand Maagøe, fall 2015. See Appendix 1.

¹⁴⁹ European Tyre and Rubber Manufacturers' Association, ETRMA (2016), "European Tyre & Rubber Industry; Statistics Edition 2015". 2010 numbers.

¹⁵⁰ TM, Tekniikan Maailman, (technology World) Finland (2015), "Comparison test: Winter tyres 2016". Link: <http://tekniikanmaailma.fi/winter-tyres-2016>

Table 36: Results from Finnish test of studded tyres

Studded tyres perform significantly better	Studded tyres perform slightly better in general	Studded tyres perform significantly worse
<ul style="list-style-type: none"> - Handling on ice (subjective grade and lap time test) - ABS breaking on ice - Acceleration on ice - Breaking on dry asphalt 	<ul style="list-style-type: none"> - Handling on snow (subjective grade and lap time test) - ABS breaking on snow - Acceleration on snow - Handling on dry asphalt (subjective grade) - Handling on wet asphalt (subjective grade and lap time test) - ABS breaking on wet asphalt - Directional stability 	<ul style="list-style-type: none"> - Noise - Fuel economy

If applicable test methods were developed, and studded tyres were compared on the same scale as other tyres on the labelling parameters fuel efficiency and external rolling noise, there is a large risk that all studded tyres would perform in the lowest end of the scales, and hence not differentiating them on the current A-G scale.

6.2.2 Environmental impact of studded tyres

The main environmental problem arising from studded tyre use is the particle pollution from road wear. In the Nordic countries where studded tyres are primarily used, the efforts to decrease the use of studded tyres originate in the exceeding of particle limit values in cities, and the high particle emissions from road wear when using studded tyres^{151, 152}. The three Nordic countries have made a decree on studded tyres, which focuses on limiting the number of studs per tyre and setting limits for the road wear measured in over-run tests¹⁵³.

Despite the efforts to limit the use and environmental impact of studded tyres, the Nordic countries acknowledging that studded tyres cannot be completely avoided due to safety reasons¹⁵⁴. Since the studded tyres are chosen by end-users for safety reasons, and there is a trade-off between rolling resistance and snow/ice grip^{155,156}, it is questionable if including studded tyres in the labelling scheme will have any effect on the share of studded tyres or the demand for studded tyres with lower RRC. Due to the safety aspect, labelling studded tyres according to fuel efficiency, wet grip and external rolling noise, is likely to have only limited relevance and value to the end-users. This is also evident from the C1 user survey, where more users value the snow and ice grip as 'very important' (62 %) than the fuel efficiency (28 %) for studded tyres.

¹⁵¹ Ottesen, K., Gjerstad, K.I., and Snilsberg, B. (2015), "Studded tyres and air quality in Norway", Eden Group meeting 25th September 2015. Statens vegvesen Vegdirektoratet. Link: <http://stro.se/wp-content/uploads/2015/10/Vegdirektoratet-presentation-of-VTI-test-EDEN-Group-meeting-25.09.25.pdf>.

¹⁵² Heikki Tervahattu (2006), Presentation: "Forskning på støy og støv i Finland", for the Norwegian Public Roads Administration, Trondheim September 2006. Link: http://www.vegvesen.no/attachment/60891/binary/13164?fast_title=Forskning+p%C3%A5+st%C3%B8y+og+st%C3%B8v+i+Finland+%28p%C3%A5+engelsk%29

¹⁵³ Over-run Task Force: Improvement of test method accuracy. EDEN-group meeting called by Statens vegvesen Vegdirektoratet Oslo, 25th of September 2015

¹⁵⁴ Studded tyres and air quality in Norway, Eden Group meeting 25th September 2015. K. Ottesen, K. I. Gjerstad and B. Snilsberg, Statens vegvesen Vegdirektoratet.

¹⁵⁵ TM, Tekniikan Maaailman, (technology World) Finland (2015), "Comparison test: Winter tyres 2016". Link: <http://tekniikanmaailma.fi/winter-tyres-2016>

¹⁵⁶ Regulation (EU) 661/2009 Of The European Parliament And of the Council. Difference in threshold for snow vs. Normal tyres on the RRC and noise scales.

Since rolling resistance of studded cannot be measured with the test standard referred to in the Tyre Labelling Regulation, it is not possible to compare rolling resistance test results to that of non-studded tyres. However, the approximate tests points toward significantly higher rolling resistance for studded tyres. The potential environmental benefit of better fuel efficiency for studded tyres is, however, limited due to the very small market share on EU level.

6.2.3 Conclusions on studded tyres

Due to the lack of comparable test methods and low saving potential it is recommended not to include studded tyres in the Tyre Labelling Regulation. The fact that studded tyres cannot be tested under the current test standards makes results incomparable to results of other tyres.

The low market share of below 0.25 % of C1 market in EU results in a low fuel saving potential by reducing RRC of studded tyres. In the Nordic countries with high market shares of studded tyres, their use is already being limited due to the particle pollution arising from driving studded tyres on asphalt. In many other European countries the use of studded tyres is prohibited.

7. Market surveillance

This section provides an overview of activities at Member State level including ADCO¹⁵⁷ activities in order to assess the level of implementation and enforcement of the labelling scheme.

The Market Surveillance Authorities (MSAs) are appointed by each Member State, and made responsible for the market surveillance of the Tyre Labelling Regulation within the national market. In order to optimise the implementation of the Tyre Labelling Regulation and harmonise different market surveillance activities, the “Expert Group on Tyres Labelling – Market Surveillance Administrative Cooperation (E02808)”, ADCO, was formed. The members of ADCO are representatives from each Member State. In total four ADCO meetings have been held since 2012¹⁵⁸. The minutes from the ADCO meetings show that there are great variances in the market surveillance activities carried out in the various Member States for those attending the meetings¹⁵⁹.

7.1 Market surveillance activities in Member States

Market surveillance and enforcement play a central role regarding the effectiveness of the labelling scheme. Since there is no collective overview on EU-level of market surveillance activities regarding the Tyre Labelling Regulation, a number of MSAs were interviewed to provide the information.

The MSAs from Belgium, Finland, Germany (3 Regions), Estonia, Malta, Netherlands (mail), Sweden, United Kingdom, Hungary (mail), Poland and Slovakia were interviewed. Since it was not possible to reach all Member State MSAs, the interview results are not representative for the EU as a whole. However, they provide a good insight in the types of activities carried out, and the differences in how market surveillance is approached in the Member States.

The market surveillance activities in the Member States that were interviewed are shown in Table 37, where the concrete information that could be gathered from ADCO minutes is listed as well. The MSAs count the inspection as either number of shops or number of tyres or tyres sets inspected, and therefore the units are not aligned.

Most Member States have one national MSA, whereas a few such as Germany, Hungary and Spain have regional market surveillance, and therefore regional MSAs. In five out of the 11 interviewed Member States, the MSA enforcing the Tyre Labelling Regulation, were also responsible for enforcing the Energy labelling Directive and its implementing measures.

As seen in Table 37 the prevailing type of Market Surveillance in all Member States was the point of sales inspections. Some Member States inspected only physical shops, while many also inspected internet shops. In all Member States, the main task was to inspect the presence of the label, and that it was positioned correctly. In some cases, it was also checked that the tyre labelling information was shown on the bills/invoices as well, but most MSAs considered this point less important, because it relates to information given post-sale. A few MSAs mentioned inspection of correct communication of the label information from dealers to customers.

¹⁵⁷ European Commission (2015), “Register of Commission Expert Groups and Other Similar Entities – Expert Group on Tyres Labelling, Market Surveillance Administrative Cooperation (E02808)”, Tyres ADCO Website. Link: <http://ec.europa.eu/transparency/regexpert/index.cfm?do=groupDetail.groupDetail&groupID=2808&Lang=EN>,

¹⁵⁸ European Commission (2015), “Register of Commission Expert Groups and Other Similar Entities – Expert Group on Tyres Labelling, Market Surveillance Administrative Cooperation (E02808)”, Tyres ADCO Website

¹⁵⁹ European Commission (2015), “Register of Commission Expert Groups and Other Similar Entities – Expert Group on Tyres Labelling, Market Surveillance Administrative Cooperation (E02808)”, Tyres ADCO Website

Table 37: Market surveillance activities in the Member States where information was available

Member State	Surveillance activities	Number of inspections	Non- compliance
Sweden	Shop inspections including internet shops	>30 shops since 2012	No non-compliance
	Document control	10 that failed (no documents received)	
Estonia	Tyre documents and questionnaire regarding supplier responsibility	Around 100 tyre sets per year	
	Shop inspections (physical shops)	Around 5-10 tyre sets per year	Low non-compliance
Netherlands	Shop inspections	760 shops since 2012	<10 % non-compliance
	Information campaign by the ministry not the MSA itself	Targeting mainly end-users	
Poland	Inspections at suppliers, importers, retailers	135 entities since 2013, 640 tyre models	No or low non-compliance
	Technical documentation inspection	No specific number, but reports that it is many	No problems of receiving documentation
Germany – Hesse	Shop inspections including internet shops	172 shops in 2014	19 shops with no labelling
	Technical documentation	Requested 5 documents	All received
	Laboratory testing	Send to Rhineland-Palatinate	
Germany – Rhineland-Palatinate	Shop inspections	362 inspections in 2014 674 inspections in 2015	119 of the 362 inspections in 2014
	Technical documentation inspection	For the tyres they test in laboratory	
	Laboratory tests	4 models in 2014 8 models in 2015	Problem with varying test results
Germany – Baden Württemberg	Shop inspections	174 models/41 shops in 2014 316 models/31 shops in 2015	No non-compliance (2015 final numbers to be registered)
	Technical promotional material	30 inspections	
Germany – Bavarian	Shop inspections	50 shops, 64 tyre models	12 non-compliance cases from missing or faulty label
	Technical documentation inspection	8 tyre models (same models that were tested)	
	Laboratory tests	8 tyre models	1 not compliant, 1 pending
Finland	Shop inspections (physical shops)	150 shops since 2013	Low non-compliance
United Kingdom	Awareness campaigns; tyre dealers, importers, car dealers	More than 500 visits in total since 2013	Website monitoring, 2013: 62 tyre brands – 10 had not label, 18 had incomplete information
	Shop inspections		
	Website monitoring		
	Technical documentation control	Requested for 10 models	Received for 8 models
Malta	Information campaigns; end-users, tyre dealers	Merged with energy labelling campaign	
	Shop inspections, including internet	15 shops 1 internet store (87 tyre models)	Two tyre models not compliant
Belgium	Shop inspections	76 shops since 2013 (only C1)	In 2015: all showed the label*

		36 in 2013 and 40 in 2015	
	Technical documentation control	Requested for 10 C1 models	Only received some of them. Request again.
	Lab test	2 C1 models currently tested	Test ongoing
Portugal	Have not yet implemented the national legislation to appoint a MSA		
Italy	Reported that no inspection or other market surveillance activities were conducted		
Slovakia	Shop inspections including internet shops	70 dealers inspected in 2014 (solely based on complaints)	4 were non-compliant

* Nine did not have information on relevant documents. Three had non-compliant communication procedures.

In general, the MSAs found high level of compliance regarding position of the label and information on bills and invoices. However, the actual level seemed to vary greatly, from 0 % non-compliance to 25 %, which seems to be due to differences in inspection procedures. The non-compliance occurred in various ways with the most widespread being the label entirely missing or positioned wrong. Germany found wrong label dimensions, because the label had been integrated into a larger sticker with additional information. In Estonia a single case of labelling of studded tyres was found, which was assumed to be false labelling. In all Member States, the procedure was to let the retailer correct the non-compliance issues, and all MSAs reported that this was usually done quickly.

Regarding document control, only four of the interview Member States had requested technical documentation from suppliers/importers. Both the Swedish MSA and the MSAs of the individual federal states of Germany reported difficulties in requiring the documentation due to lacking jurisdiction when suppliers/supplier representatives are located in other countries/Member States. The MSAs are appointed and empowered by national law in a specific Member State, and hence suppliers located in other Member States can claim they have no obligation toward the MSAs. However, some MSAs, including Germany, Belgium and United Kingdom succeeded in requiring the technical documentation from suppliers or through importers in their own area.

In most Member States, it was not attempted to require the technical documentation, since they were either aware of the problem of lacking jurisdiction, or because without laboratory testing, there were no frame of reference to verify the information in the technical documentation.

Only two of the interviewed MSAs, Germany and Belgium, performed laboratory tests to verify the label values. Most tyres were tested in Germany, who found discrepancies between label values and tyre performance in 6 out of 8 tested tyres in the first test. However when performing the second test, only one of these discrepancies could be confirmed. The discrepancies occurred on all three labelling parameters. According to the German MSA performing the tests, these results show lack of reproducibility of the tests.

All Member States mentioned the high costs and too few accredited test facilities to be the greatest barriers for laboratory testing. At the time of the interviews most of the interviewed Member States were awaiting the decision on a joint action on labelling tyre testing funded under the EU Horizon 2020 Research and Innovation programme. For most Member States, this EU founded joint action test programme on tyres labelling is seen as an opportunity to start making laboratory tests on tyres. The purpose of the programme is both to obtain more test data and to develop best practices for market surveillance testing.

7.2 National enforcement and sanctions

Most of the MSAs reported full empowerment with regards to perform inspections and apply sanctions in non-compliance cases. The only exception found was Portugal. Malta and Germany reported that national laws restricted them from applying sanctions directly. However, only few Member States had found reasons for sanctioning, since the high level of compliance at point of sales inspections and the lack of other inspection methods made sanctions redundant.

8 Improved Regulation and implementation

8.1 Improved pre-sale information

Many C1 end-users claim that they do not see the tyres displayed in a shop before the purchase (59 %) and more and more consumer purchase tyres online¹⁶⁰. Furthermore, MSAs carrying out shop inspections have observed that only a few tyre models are on display at the point of sale while the rest are placed in the stock. In some countries, up to 90 % of the inspected shops did not have tyres on display. This implies that customers often do not see the tyre, and hence not the label, before the purchase.

In Article 5 pt. 1 it is stated that the distributors shall ensure that *at the point of sale* the tyre either bear the label as sticker or the label is clearly displayed in immediate proximity of the tyre. In article 3 pt. 3 the *point of sale* is defined as “the location where tyres are displayed or stored and offered for sale”. According to this definition, tyres in the stock at shops should be labelled as well.

However, this is somewhat opposed by Article 5 pt. 2, which states: “Where tyres offered for sale are not visible to the end-user, distributors shall provide end-users with information [...] of those tyres”. Since tyres in the stock (and therefore their label) are not directly visible to the customer, the seller should inform the customer of the labelling parameters.

Hence, there is a need for clarification of the Regulation regarding the responsibilities of tyre distributors (dealers). Furthermore, it is requested by MSAs and other stakeholders that the Regulation clearly states that information is to be given prior to the purchase. The information on the receipt or invoice does not help the consumer make an informed choice.

The following is proposed to clarify Article 5 of the Regulation and make it more likely that consumers are given the label information prior to the purchase:

- It should be made clear that Article 5(2) should apply in the cases of telephone sales or when stock is not available at the point of sale.
- The label should be shown on the screen when tyres are offered for sale online (in web shops etc.). Currently it is only required to show information about the label performance parameters. The provision to show the label when products are offered for sale online is already implemented for energy related products labelled under the energy labelling Directive (2010/30/EU).
- The Regulation should be clearer on *pre-sale* provision of label information, emphasising that information on receipts/invoices (post-sale) is not enough.
- The Regulation should indicate (in line with the provisions of the Energy Labelling Directive 2010/30/EU) that any advertisement for a specific model of tyres should include, where energy-related or price information is disclosed, a reference to the fuel efficiency class, the wet grip class and the external rolling noise class.
- The Regulation should be clearer on the labelling requirements for tyres placed in storage facilities of distributors, preferably obliging all C1 and C2 tyres in stock to be labelled. This would also make market surveillance easier to perform.
- The Regulation should be clearer on information provided to end-users prior to the purchase, obliging the distributor to show the label for all tyres suggested to the end-user in a purchasing process. This might be linked to providing price information as in the Energy Labelling Directive 2010/30/EU.

¹⁶⁰ Consumer survey with C1 end-users in selected European Countries, Viegand Maagøe, fall 2015. See Appendix 1.

- The labelling obligation should be extended to cover all advertisements including the now omitted advertisements in billboards, newspapers, and magazines.

A complication when showing the label information in advertisements is that tyres of the same model with different dimensions often have different label values.

At the point of sale, the tyre label for C1 and C2 tyres can be shown either as a printed label in proximity to the tyre or as a sticker on the tyre tread. Regarding the relative effectiveness of the two methods to show the label, 47 % of the respondents in the consumer survey consider the tread sticker to be the most visible, 23% the label, and 30% have no preference or do not know (Figure 26). However, the relevance of how the label is shown is undermined by the fact that most tyres are not on display. If it is required that the tyres should also be labelled in the storage facilities of the distributors (as mentioned above) the sticker might be a better solution than the printed label. According to tyre suppliers, 47% of them provide their C1 and C2 tyres with both the printed label and the sticker, while 33% provide only the sticker, and 20% did not answer the question. Hence, most tyres are already provided with a printed label and/or a sticker, and the supplier cost is therefore assumed not to increase.



Figure 26: How end-users find that the tyre label is most visible

Labelling tyres in the stock will make market surveillance easier to perform, but since end-users will still not necessarily see the tyres, if they are fitted on their car in the same place as the tyres are purchased, the tyre distributors (dealers) play an important role in providing end-users with label information. This is, however difficult for MSAs to inspect. Often the inspection of how retailers communicate the information to customers are solely based on retailers' statements on how they inform their customers (related to Article 5.2 and Article 6)

8.1.1 Vehicle suppliers and distributors

Vehicle suppliers and distributors are responsible for providing end-users with information on the tyre label parameters when they are offered a choice between different tyres to be fitted on a new vehicle they are purchasing.

According to the consumer survey, 31 % of the C1 end-users were offered a choice between different tyres at the purchase of a vehicle, while 56 % were not, and 13% do not remember. For comparison, 27% were provided with information about the tyres from the car dealer, 56% were not and 17% do not remember.. Vehicle suppliers and distributors report that the tyres sold with new vehicles are chosen by car manufacturers; however, customers might be able to purchase an additional set of tyres with the car (so-called false OE).

According to MSAs it is not clear from the Tyre Labelling Regulation when end-users are offered a choice between different tyres when purchasing a new vehicle (related to Article 6). For instance, it is not defined if it is a choice when there are various brand options of the same size, various size options of the same brand, or when an additional set of tyres is purchased. To avoid any doubts the following simplification of the Regulation is suggested:

- Vehicle suppliers and distributors should be responsible for always providing the tyre labelling information, including in situations where the tyres are fitted on a car offered for sale

As with the tyre distributors, it is difficult to inspect whether distributors are sufficiently communicating the tyre labelling information to the customers. The inspections are solely based on retailers' statements about how they provide the information.

8.2 Registration database

The idea with establishing a digital registration database is that all tyres should be registered in the database prior to being placed on the European market. Such a database has also been suggested for products covered by the Energy Labelling Directive (2010/30/EU). According to the proposal, the database should be separated into a publically available section and a section accessible for market surveillance authorities only.

The publically available sections should contain the label values and/or electronic versions of the tyre label for all tyre models sold in the EU. Furthermore, it should include also consumer information about the tyre label to facilitate general awareness. National websites exist that resembles what is expected of the publically available section. An example is the Danish "daeklabek.dk", which contains consumer relevant information about the label parameters as well as other relevant parameters when purchasing tyres. Furthermore, the site has an opportunity to search for tyres that fit your car by entering either tyre dimension or a specific Danish license plate. The tyre model in the search result can then be sorted based on the label values.

The section reserved for MSAs should contain technical documentation for all tyre models provided by the manufacturer, including specific test conditions and results behind the tyre's label values. This would allow MSAs to access the technical information directly, and mitigate the current problems experienced by some MSAs in receiving the information.

The database should complement the existing ICSMS database¹⁶¹, but with different types and sources of information to not fragment the pan-European communication between MSAs into two different channels. The difference is that where the information on the ICSMS database is submitted by the MSAs and only on the products taken out for control, the new database should contain information on all tyres marketed in the EU, submitted by manufacturers.

The ICSMS database should continue be the platform where MSAs share information and test results etc. related to specific tyre models they have taken out for market control. Such information could be commercially sensitive, and therefore it cannot be publically available.

For end-users, the suggested registration database could provide pre-sale information on the labelling parameters. According to the consumer survey, 51 % of consumers would use the database to find information on tyres prior to purchase and 37 % would consider using it.

The registration database could provide market information for policy decisions, facilitate market surveillance and serve as a tool for consumer information. Interviewed market surveillance authorities generally agree that the establishment of a registration database is a good idea, since it could make market surveillance easier and give MSAs better access to technical documentation. It could also be a good tool to obtain more transparency regarding test methods and conditions used by suppliers, which according to some MSAs is lacking.

One of the biggest concerns regarding the database is that it might be difficult to get all tyres on the market in the database, especially for tyres imported from outside the EU. Another concern is that the workload of creating and maintaining the database might cause a decrease

¹⁶¹European Commission (2016), "Website of ICSMS – the internet-supported information and communication system for the pan-European market surveillance". Website last updated 23.03.2016. Link: <https://webgate.ec.europa.eu/icsms/>

in the number of inspections made due to lack of resources. It is essential that the impact of better and easier market surveillance justify the workload of running the database. Furthermore, it should be thoroughly defined and assessed in terms of objectives, final users, workload, process etc. One MSA mentioned that the registration database should not provide hindered tyres to access the market in the EU.

8.3 Improved market surveillance and awareness raising

Market surveillance activities vary greatly between Member States - from zero to several hundred shop inspections per year. The prevailing type of market surveillance is point of sales inspections. Some authorities performed inspection of technical documentation, but only very few have performed laboratory tests to verify the label values. According to MSAs, high cost and too few accredited test facilities are the greatest barriers for laboratory testing of tyres.

Some MSAs report that the technical documentation is incomplete or lack transparency, especially regarding information on the specific conditions the tyres were tested at. Article 4.4 of the Regulation states: "The technical documentation shall be sufficiently detailed as to allow the authorities to verify the accuracy of information provided on the label with regard to fuel efficiency, wet grip and external rolling noise."

A solution could be to define in the Regulation what parameters should, as minimum be included in the technical documentation. Such a definition already exist in the various Regulations implementing the Energy Labelling Directive 2010/30.

For most Member States the joint action joint action on labelling tyre testing funded under the EU Horizon 2020 Research and Innovation programme is seen as an opportunity to make any laboratory tests on tyres. The purpose of the programme is both to obtain more test data and to develop best practices for market surveillance testing. The possible inclusion of new performance parameters in the labelling scheme might increase costs and thus the barriers of testing tyres.

The relatively low level of market surveillance affects consumer confidence negatively, and many stakeholders state that to increase confidence, more market surveillance (including testing) and sanctions towards non-compliance is needed. Furthermore, retailers claim that they 'not often' or 'never' experience that their shops are inspected, which has given them the impression that the tyre labelling is of low priority to the authorities. Based on this, some tyre dealer organisations have decreased their effort to educate their employees in advising consumers about the label parameters. The involvement of the dealers is considered as being of great importance for the consumer awareness and the actual use of the label, and it is therefore important to increase market surveillance efforts where it is possible.

The Tyre Labelling Regulation itself does not include detailed provisions with regard to market surveillance and enforcement. Instead, the Regulation refers to the provisions in Regulation 765/2008, which includes the general rules regarding market surveillance and controls of products entering the community market. This is different from the EU Energy Labelling Directive (2010/30/EU), which includes more detailed provisions related to products control and market surveillance than the ones included in Regulation 765/2008 (especially in Articles 3, 4, 5, 6, 15). In addition, the implementing measures under the Energy Labelling Directive (in accordance with article 10 point 4 (c)) must include detailed description of the content of the technical documentation to be required of MSA's for market surveillance purpose.

Even though the enforcement provisions are less detailed in the Tyre Labelling Regulation, MSAs in general do not report lack of empowerment for making inspections and applying

sanctions with regard to the tyre labelling scheme. They are more concerned about testing costs, uncertain test methods and lack of repeatability/reproducibility in test results.

The following is proposed in order to reinforce the market surveillance activities and to avoid redundant efforts by doing double work of testing and requesting documents for the same tyres in different Member States:

- Reinforce the provisions of Article 4(1)(b) to ensure that the energy label follow physically each batch of one or more identical tyres.
- Oblige Member States to publish results of marked surveillance activities and to make them available to industry and dealers. The purpose is to raise the awareness among industry and dealers of performed activities and exchange of results and experiences. Results could be included in the tyres ADCO website.
- Amend Annex IVa according to the proposal from the Expert Group on laboratory alignment of tyre rolling resistance installed under Regulation (EC No 1222/2009)¹⁶².
- Not extending the labelling scheme to cover mileage or abrasion, because these parameters entails significant increase in the market surveillance cost. Extra cost will reduce the number of inspections and less inspections could easily hamper the consumers', suppliers' and distributors' confidence in the label scheme.

Furthermore, Member States should give priority to market surveillance activities including participation in the foreseen joint action on labelling tyre testing funded under the EU Horizon 2020 Research and Innovation programme.

8.3.1 Awareness and label confidence

More than half of the consumers in the investigated countries are not aware of the label. Both industry, dealers and consumer organisations recommend campaigns promoting the label to increase the consumers' knowledge of the label and explain its meaning in case new parameters and/or symbols are added. The target groups should be end-users in C1, C2 and C3 segments. However, awareness campaign targeting C1 end-users are the most important because they constitute the largest share of the tyre sale. In addition, C2 and C3 end-users often do not purchase tyres directly but as part of leasing contracts and fleet solutions.

According to MSAs' experience from shop inspections, many tyre dealers report that end-users do not ask actively for the tyre labelling information. This is interpreted by MSAs to imply that the label might not have a relevant effect on end-users' purchase decisions, which could be caused by low awareness among other things.

In awareness campaigns, the information on fuel efficiency and road safety provided by the tyre label are already strong drivers for end-users. Combining this with information on other issues related to these parameters (such as keeping the right tyre pressure and checking tyres for wear regularly), would place the relevance of the label in a bigger perspective for end-users. This would be in addition to information on external rolling noise importance and meaning of potential new labelling parameters.

Awareness campaigns could also include reference to the existing fuel savings calculator on the EU Commission's webpage¹⁶³ to let end-users calculate their potential fuel savings from tyres.

¹⁶² Report from the Expert group on laboratory alignment for the measurement of tyre rolling resistance installed under Regulation (EC) No 1222/2009 and listed on the Commission registry of Expert groups to European Commission, 2015

¹⁶³ European Commission (2016), "Fuel savings calculator" Website last updated 23.03.2016. Link: <http://ec.europa.eu/energy/en/content/fuel-savings-calculator>

The awareness campaigns could be run at national level by Member State authorities, at EU level by the Commission or both. It would be an advantage to include tyre suppliers and distributors in the campaigns to reach end-users most efficiently. Some Member States have already facilitated, or are planning to facilitate, awareness campaigns regarding the tyre label. Experiences and recommendations from these campaigns should be taken into account.

Another aspect of awareness raising is related to the requirements regarding public procurement in the Energy Efficiency Directive 2012/27/EU. In order to promote the dissemination of energy efficient tyres, it is important that Member States ensure that their Central Governments are aware of the requirement to purchase tyres in the highest fuel efficiency class and to include this aspect in their tenders for service contracts in accordance with the requirement in Annex III of the Energy Efficiency Directive 2012/27/EU.

8.4 Improvement of test standards and conditions

Several sources, including independent consumer organisations, indicate that there is an incoherence between the labelled performance and the measured performance of a tyre^{164, 165, 166}. Tests performed by MSAs confirm the lack of reproducibility of the tests, hinted by third parties. This also implies that in disputes, MSAs might have difficulties to prove incorrect labelling due to the low reproducibility of results.

According to MSAs, a large part of this problem is due to different conditions for the tests, applying test methods incorrectly and a lack of transparency in which conditions were used for the tests for calculating label values. According to a German MSA and industry members, there might be other elements in the complex test method, and in Germany, the exact reason for the lack of reproducibility of test results is currently being further investigating. The results of this investigation should be taken into account when they are ready. Especially the braking test on wet surface for measuring wet grip gives rise to large differences in test results. There is general agreement that one of the reasons for this, is a problem with too wide test condition allowances for the wet grip test¹⁶⁷.

8.4.1 Wet grip test standard

The experience accumulated so far by the Industry and by the MSAs on wet grip test standards is indicating an opportunity for developing further improvements on the accuracy of the test method. This could be achieved for example, but not necessarily only, by reviewing the current set of test conditions ranges and/or of the mathematical formulas which are allowing to align the results when the tests are performed in different conditions, for example due to different test locations or during different periods of the year.

Due to the wide intervals of allowed test conditions, a number of correction factors were adopted for calculating the wet grip. Examples of this are the correction factors for the surface friction coefficient (' b ' = μ/grip) and temperature (' a ') that are not working as intended and have a large influence on the result. Hence, there is a large difference in results if a tyre is tested at different conditions and correction factors are used to make results comparable.

¹⁶⁴ Consumentenbond (2013), "Bandenlabel wijkt af van testresultaat zomerbanden" (English: "Band Label differs from summer tires test result"), February 2013. Link: <http://www.consumentenbond.nl/actueel/nieuws/nieuwsoverzicht-2013/zomerbandentest/>

¹⁶⁵ Kragh, J., Oddershede, J. (2013), "NordTyre – Car tyre labelling and Nordic traffic noise" Internoise, September 2013, Innsbruck Austria. Link: <http://www.stoysvakedekk.no/wp-content/uploads/2014/02/0265.pdf>

¹⁶⁶ Tyre reviews (2015), "2015 test World Summer Tyre Test" Website. Link: <http://www.tyrereviews.co.uk/Article/2015-Test-World-Summer-Tyre-Test.htm>

¹⁶⁷ Regulation (EC) No 228/2011 amending the tyre labelling regulation (1222/2009) with regard to wet grip testing method for C1 tyres

Narrowing the permitted wet grip test conditions ranges might be one of the options to improve the accuracy of the test method. Another solution could be to change the correction factor or introduce another, more correct equation.

Continental Tyres reports that when duplicating the test conditions on their indoor track, there is only a small spread of results. ETRTO are therefore investigating how the broad scope of allowed test conditions can be limited in a meaningful way. Any revision of the test condition ranges should possibly be limited enough to ensure better consistency between results, but at the same time not so much that it limits the number of days tests can be performed on outdoor tracks.

8.4.2 Rolling resistance and noise test standards

For the external rolling noise test, there is also challenges related to obtaining reproducible results, since there is a large spread of surfaces allowed in the test. The test method follows an ISO norm, and is performed as a track test. The industry is currently working on improvement suggestions for the noise test in addition to those for the wet grip test.

The rolling resistance test method follows an ISO standard, and as opposed to the wet grip test, the test is performed as a laboratory drum test rather than a track test. There is a process of alignment between measurement equipment in accredited labs, which has resulted in rather low variations in measured rolling resistance results. The adhoc expert group on laboratory alignment of tyre rolling resistance has suggested recently some improvements of the alignment methods. It is suggested that Annex IVa of the Tyre Labelling Regulation is amended according to these, in order to increase the accuracy and reproducibility of the rolling resistance tests.

In conclusion for test standard/conditions and based on the findings of industry, MSAs and independent consumer organisation regarding the lacking repeatability/reproducibility of tests, it is highly recommended to:

- Solve the problems with repeatability/reproducibility of test methods and results with regard to wet grip according to the ongoing ETRTO study on the subject, and include the corrections in the Tyre Labelling Regulation.
- Amend Annex IVa according to the proposal from the Expert Group on laboratory alignment of tyre rolling resistance installed under Regulation (EC No 1222/2009)¹⁶⁸.

8.5 Other suggestions

8.5.1 Tyres for emergency vehicles

Some tyres are produced in very small amounts or the market in Europe is too small to cover the cost of labelling the tyres. This sometimes results in the tyres not being brought to the EU market. This has been mentioned by stakeholder for emergency vehicles such as ambulances in particular. Ambulances need special tyres with both high load index and high speed index.

Professional off-road (POR) tyres are already exempted from the tyre labelling Regulation, since their specific design for exceptional adherence performances in poor conditions and in all terrain, does not allow them to fulfil regulatory thresholds and significant grading levels.

Tyres for emergency vehicles such as ambulances are not covered in the POR category, but a similar exception could be made for them, if they can be specified properly.

¹⁶⁸ Report from the Expert group on laboratory alignment for the measurement of tyre rolling resistance installed under Regulation (EC) No 1222/2009 and listed on the Commission registry of Expert groups to European Commission, 2015

8.5.2 Performance as function of wear

The performance of tyres, both in the Type Approval and the Labelling Regulation, is based on tests with new tyres. Hence, there is no information to end-users on how tyre performance change as the tyre is worn during the course of its life. It has been argued by some stakeholders that tyres are designed to perform well in the testing, but there are no incentives for suppliers to produce tyres that perform well during their entire life.

Suppliers agree that tyre performance changes when the tread is worn with a general trend of lower wet grip and rolling resistance the lower the tread pattern gets. However, it is not possible to determine beforehand how exactly the tyre will wear and thus how the performance will change or how fast. This is due to the many external parameters affecting tyre wear as discussed in chapter 5.2.1, which is highly dependent on user behaviour and driving pattern.

9. Better Regulation

9.1 Relevance

The aim of the Tyre Labelling Regulation is to increase the safety as well as the economic and environmental efficiency of road transport by promoting fuel efficient and safe tyres with low external rolling noise¹⁶⁹. The Regulation provides a framework for the provision of harmonised information, allowing end-users to make an informed choice when purchasing tyres.

Increasing the fuel efficiency continues to be highly relevant with the EU facing scarcity of resources and dependence on energy imports as well as the need to limit climate change. With the transport sector constituting one third¹⁷⁰ of the European energy consumption, increasing fuel efficiency of road transport plays an important role in addressing these challenges. Tyres account for 20-30 % of the vehicle fuel consumption, mainly due to their rolling resistance¹⁷¹. Decreasing rolling resistance is therefore important for increasing fuel efficiency, and as discussed in Chapter 4 of this report, an unexploited potential for decreasing rolling resistance of tyres still exist.

Increasing road safety is highly relevant with more than 25,000 road accident fatalities in the EU in 2014. The Commission has adopted a road safety programme¹⁷² to decrease road deaths between 2011 and 2020¹⁷³. Tyres are an important part of road safety, being the only contact between the vehicle and the road. Providing consumers with information on tyre safety parameters is highly relevant as well, with the tyre safety parameter wet grip being a top-level concern for consumers along with price when purchasing tyres¹⁷⁴. However, the relevance of the Regulation would be further increased by including additional safety performance parameters such as tyre grip on snow and ice in addition to the wet grip parameter, as discussed in Chapter 5.1 in this report.

Regulating external rolling noise levels also continue to be highly relevant. The Environmental Noise Directive (END) 2002/49/EC¹⁷⁵ entered into force in 2002 in, which obliges European Member States to report noise levels. These nationally measured data shows that in 2013 70 million people in Europe suffered from unacceptable noise levels in so-called Black Areas, exceeding 65 dB noise levels, and even more in Grey Areas with noise levels between 55 to 65 dB¹⁷⁶. The WHO recommends night noise levels not higher than 40 dB in order to protect public health. Regulating external rolling noise thus remains important to mitigate this problem, and as seen in Chapter 4 there is still potential for decreasing the external rolling noise of tyres.

9.2 Effectiveness

So far, the tyre labelling scheme has shown its effectiveness by being able, for all the performance parameters included in the scheme, to transform the market in a positive

¹⁶⁹ Regulation 1222/2009 of the European Parliament and of the Council

¹⁷⁰ European Commission (2014), "EU Energy in Figures statistical pocketbook 2014", European Union, 2014. ISBN 978-92-79-29317-7. Link: http://ec.europa.eu/energy/sites/ener/files/documents/2014_pocketbook.pdf

¹⁷¹ Regulation 1222/2009 of the European Parliament and of the Council

¹⁷² European Commission (2010), "Communication from the Commission to the European Parliament, the Council, the European Economic and Social Committee and the Committee of the Regions - Towards a European road safety area: policy orientations on road safety 2011-2020". Brussels, July 2010. COM(2010) 389 final. Link: http://ec.europa.eu/transport/road_safety/pdf/com_20072010_en.pdf

¹⁷³ European Commission (2016), "Mobility and Transport Road Safety; Statistics – accidents data". Website last updated 04.03.2016. Link: http://ec.europa.eu/transport/road_safety/specialist/statistics/index_en.htm

¹⁷⁴ Consumer survey with C1 end-users in selected European Countries, Viegand Maagøe, fall 2015. See Appendix 1.

¹⁷⁵ Directive 2002/49/EC of the European Parliament and of the Council

¹⁷⁶ European Environment Agency (2014), "Exposure to and annoyance by traffic noise", December 2014, Link: <http://www.eea.europa.eu/data-and-maps/indicators/exposure-to-and-annoyance-by-1/assessment>

direction from 2013 to 2015, the only exception being the external rolling noise for C1 and C2 tyres (Chapter 3). However, the effectiveness of the scheme is reduced due to relatively weak enforcement as described in Chapter 7 and end-user priorities presented in Chapter 2. Furthermore, the energy savings obtained through the labelling scheme is being somewhat counteracted by a trend towards larger tyres (due to deliberate consumer choice), which tend to increase the absolute fuel consumption, even though they are more fuel efficient than earlier models of that size.

The market transformation is in part due to the influence of the type approval Regulation (661/2009), removing the worst performing tyres from the market. The influence from the Tyre Labelling Regulation is evident from tyre performance increasing to higher classes than the lowest allowed performance. For the external rolling noise in particular the effectiveness of the Tyre Labelling Regulation is evident only for C3 tyres.

9.3 Efficiency

In terms of user awareness, the Tyre Labelling Regulation is generally efficient, but there is room for improvement. Around half of end-users were aware of the label before participating in the consumer survey, but according to tyre distributors, end-users rarely ask actively for the label information during a tyre purchase process. The efficiency of the labelling scheme can be increased by improving end-user awareness and active use of the label, hence realising the benefits of the efforts already put into the labelling scheme to a greater extent. By increasing the relevance of the labelling scheme to end-users, i.e. through inclusion of snow and ice grip performance, there is a large improvement potential of user awareness and active label use in especially the Nordic countries. This improvement potential can be reached with very low additional costs by using already widely applied tests for snow and ice grip. Other tyre performance parameters, i.e. mileage and abrasion, are not recommended to be included in the labelling scheme, partly due to the large testing cost in combination with the very large uncertainty of whether the end-user would gain any benefits.

Not only the user awareness and response to the label is important for its efficiency, but also the response of suppliers. Suppliers are obliged to label the tyres, but not to improve the tyre performance parameters. However, the market transformation shows that suppliers have adopted the labelling scheme as an important product-differentiating factor. This suggests that the extra investment needed to achieve higher efficiency levels has generally been outweighed by the benefits. This has also contributed positively to technical innovation on especially rubber compounds, making it possible to improve fuel efficiency and wet grip simultaneously.

9.4 EU added value

A harmonized regulatory framework on EU level provides added value to the EU compared to having regulations at Member State level, because it reduces costs for suppliers by allowing them to enter the entire EU market with only one label. This strengthens competitiveness EU-wide and facilitates easier inter-European trade with tyres, which also benefits consumers in terms of lower prices and wider range of products. Furthermore, a regulation on EU level provides end-users with the same, harmonised information, no matter which Member State they choose to purchase their tyres in, which is increasingly relevant as the online trade increases. With the tyre labelling scheme at EU level, energy efficient and safe tyres reducing noise pollution, are promoted in all Member States, creating a larger market for such tyres and hence larger incentives for the tyre industry to develop them. Hence all Member States will also benefit from the optimised performance if the tyres in terms of lower fuel/energy consumption, lower CO₂ emissions, fewer accidents and fewer people exposed to high noise levels.

9.5 Coherence

The Tyre Labelling Regulation is coherent with Type Approval Regulation of tyres. The same measuring methods and performance parameters are applied in both Regulations, and often industry uses the results from the type approval tests to establish the labelling values. The two Regulations are closely related and complement each other. In addition, international UNECE test methods form the basis of the tests in both Regulations. The use of globally recognized measurement standards also ensures coherence with international approaches.

The Tyre Labelling Regulation is coherent with the Energy Labelling Directive and its implementing measures (Regulations) as well. The design of the label itself as well as the structure of the Regulations is very similar. Inspiration is sought from the Energy Labelling Directive and its implementing measures regarding improvements for the Tyre Labelling Regulation in order to maintain coherence, and implement improvements found in the review study of the Energy Labelling Directive in the Tyre Labelling Regulation as well.

10. Recommendations - summary

With regard to the review of the tyre labelling Regulation, it is recommended to focus on increasing trust and confidence in the current label, rather than making comprehensive changes, and including new environmental aspects that will raise the costs and complexity of the scheme. The recommendations are based on the review study, including dialogue with various stakeholders.

10.1 Recommended parameters

The following is recommended regarding the aspects addressed in the study:

Snow and ice performance should be included in the labelling scheme on a voluntary basis in order to avoid misleading end-users purchasing tyres for wintry conditions, aiding them in selecting the most appropriate tyre, and to improve road safety during winter periods. However, it could be recommended the 3-PMSF be mandatory to put on the tyre label in case it is also shown on the tyre sidewall. The use of the new logos should be considered and assessed separately for C1 and C2, C3 tyres, considering that the 3-PMSF test is applicable for C1, C2, and C3 tyres, while the upcoming "Nordic winter tyre" test and logo is applicable only for C1 tyres. For C1 and C2 tyres, the applicable logos should be shown on the label and where label information is currently shown. For C3 tyres, it should be shown in all technical promotional material. The new logos and label designs should be tested by the Commission for efficacy with consumers prior to decisions and implementation.

Retreaded C3 tyres should be included in the labelling scheme only if a system or tool is accurate enough and includes all relevant parameters for calculating the label performance parameters, and if the continuous maintenance of the tool is secured. The availability of the current predictive tool for retreaded tyres should be clarified and it should be ensured that it does not affect free competition in the retreading market. It is proposed to follow this issue to clear out the identified technical oppositions among stakeholders.

Pre-sale provision of information should be emphasised in the Tyre Labelling Regulation, to ensure that end-users are able to make an informed choice when purchasing tyres¹⁷⁷. This implies that the label should be made more visible to end-users prior to their purchasing decision, and it is therefore suggested that the Regulation is extended with provisions for:

- Online labelling. The label should be shown on the screen when tyres are offered for sale online (in web shops etc.) as is already implemented for energy related products labelled under the Energy Labelling Directive (2010/30/EU).
- Obligation of the distributor to show the label of all tyres suggested to the end-users during a tyre purchasing process.
- Inclusion of information about the label performance parameters in advertisements including the now omitted advertisements in billboards, newspapers, and magazines.
- Labelling of tyres when placed in the stock of distributors, preferably obliging labelling of all tyres according to the current Article 4(1)a or 4(1)b. This would also make market surveillance easier to perform.

A digital registration database should be established where all tyres should be registered prior to being placed on the European market. The database should be separated into a

¹⁷⁷ As reported on page 19, many consumers do not see the tyres displayed in a shop before the purchase, and surveillance authorities have observed that only a few tyre models are on display at the point of sale while the rest are placed in the stock.

publically available section and a section available only to market surveillance authorities. The registration database should complement the ICSMS database by providing market information for policy decisions, facilitate market surveillance and serve as a tool for consumer information to enhance provision of pre-sale labelling information

Market surveillance. The market surveillance efforts vary greatly among Member States and cover mainly shop inspections. Low market surveillance decreases end-user confidence in the tyre label as well as retailers' efforts to disseminate knowledge of the label. To reinforce market surveillance, it is especially important to:

- Solve the problems with repeatability/reproducibility of test methods and results with regard to wet grip according to the ongoing ETRTO study on the subject, and to include the corrections in the Tyre Labelling Regulation.
- Reinforce the provisions of Article 4(1)(b) to ensure that the energy label follow physically each batch of one or more identical tyres.
- Increase the visibility of market surveillance activities carried out by obliging MSAs to publish results of inspections and make them available to industry and dealers. The purpose is to raise the awareness among industry and dealers of performed activities and exchange of results and experiences. Results could for instance be published on the tyres ADCO website.
- Not extending the labelling scheme to cover mileage or abrasion, because this will significantly increase the market surveillance costs. Extra cost will reduce the number of inspections and less inspections could easily hamper the consumers', suppliers' and distributors' confidence in the label scheme.
- Amend Annex IVa according to the proposal from the Expert Group on laboratory alignment of tyre rolling resistance installed under Regulation (EC No 1222/2009)¹⁷⁸.

Awareness campaign(s) should be conducted to increase the C1, C2 and C3 end-users' knowledge of the labelling scheme and explain its meaning in case new parameters and/or icons are included. The campaigns could be run at national level by Member State Authorities, at EU level by the Commission or both. It is suggested that tyre suppliers and/or distributors are involved in the campaigns and that experiences from previous campaigns performed by Members States and others are taken into account. Awareness campaigns could probably also provide incentives for industry to innovate even better performing tyres and for dealers to promote the label more efficiently.

Awareness campaigns targeting C1 end-users is the most important because C1 constitutes the largest share of the tyre sales, and because C2 and C3 end-users to a greater extent purchase tyres as part of leasing contracts and fleet solutions.

In addition, Member States should be encouraged to ensure that their Central Governments are aware of the requirement to purchase tyres in the highest fuel efficiency class and to include this aspect in their tenders for service contracts in accordance with the requirement in Annex III of the Energy Efficiency Directive 2012/27/EU.

Vehicle suppliers and distributors should be obliged to provide the tyre labelling information for all tyres, including situations when the end-user is not offered a choice between different tyres to be fitted on a car offered for sale. The information should be shown in the technical promotional material given to the end-user..

¹⁷⁸ Report from the Expert group on laboratory alignment for the measurement of tyre rolling resistance installed under Regulation (EC) No 1222/2009 and listed on the Commission registry of Expert groups to European Commission, 2015

10.2 Rejected extensions

Due to uncertainties and lack of test methods, it is *not* suggested to extend the Tyre Labelling Regulation to the following:

Mileage and abrasion parameters should not be included. No suitable measurement methods exist for neither of the parameters, and it will not be possible to perform market surveillance at reasonable costs. Due to large uncertainties, there is a severe risk of providing mileage information to end-users, which is not consistent with the mileage experienced in real life. For abrasion the particle emission is dependent on the road surface to an extent that it cannot be regulated considering the tyres alone.

Studded tyres should not be included due to a low market share in the EU, resulting in low fuel saving potential, and due to lack of a suitable measurement standard.

11. Reference list

11.1 Regulations

Regulation (EC) No 1222/2009 of the European Parliament and of the Council of 25 November 2009 on the labelling of tyres with respect to fuel efficiency and other essential parameters, Official Journal of the European Union 22.12.2009, L 342/46. Link: <http://eur-lex.europa.eu/legal-content/EN/ALL/?uri=CELEX%3A32009R1222>

Commission Regulation (EU) No 228/2011 of 7 March 2011 amending Regulation (EU) No 1222/2009 of the European Parliament and of the Council with regard to the wet grip testing method for C1 tyres. Link: <http://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:32011R0228&from=EN>

Commission Regulation (EU) No 1235/2011 of 29 November 2011 amending Regulation (EC) No 1222/2009 of the European Parliament and of the Council with regard to the wet grip grading of tyres, the measurement of rolling resistance and the verification procedure. Link: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2011:317:0017:0023:EN:PDF>

Regulation (EC) No 661/2009 Of The European Parliament And Of The Council of 13 July 2009 concerning type-approval requirements for the general safety of motor vehicles, their trailers and systems, components and separate technical units intended therefor. Link: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2009:200:0001:0024:en:PDF>

Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products and repealing Regulation (EEC) No 339/93. Link: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2008:218:0030:0047:en:PDF>

Directive 2010/30/EU of the European Parliament and of the Council of 19 May 2010 on the indication by labelling and standard product information of the consumption of energy and other resources by energy-related products. The "Energy Labelling Directive". Link: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2010:153:0001:0012:en:PDF>

Directive 2012/27/EU of the European Parliament and of the Council of 25 October 2012 on energy efficiency amending Directives 2009/125/EC and 2010/30/EU and repealing Directives 2004/8/EC and 2006/32/EC. Link: <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2012:315:0001:0056:en:PDF>

Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006 concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH). Establishing a European Chemicals Agency, amending Directive 1999/45/EC and repealing Council Regulation (EEC) No 793/93 and Commission Regulation (EC) No 1488/94 as well as Council Directive 76/769/EEC and Commission Directives 91/155/EEC, 93/67/EEC, 93/105/EC and 2000/21/EC. Link: <http://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:02006R1907-20140410&from=EN>

UNECE (2014), Addendum 116: Regulation No. 117, Revision 3, "Uniform provisions concerning the approval of tyres with regard to rolling sound emissions and/or to adhesion on wet surfaces and/or to rolling resistance", United Nations, February 2014. Link: <https://www.unece.org/fileadmin/DAM/trans/main/wp29/wp29regs/updates/R117r3e.pdf>

UNECE (2013), Addendum 29: Regulation No. 30, Revision 3 – Amendment 3, "Uniform provisions concerning the approval of pneumatic tyres for motor vehicles and their trailers",

United Nations, February 2013. Link:

<https://www.unece.org/fileadmin/DAM/trans/main/wp29/wp29regs/updates/R030r3am3e.pdf>

UNECE (2013), Addendum 53: Regulation No. 54, Revision 3, "Uniform provisions concerning the approval of pneumatic tyres for commercial vehicles and their trailers", United Nations, March 2013. Link:

<https://www.unece.org/fileadmin/DAM/trans/main/wp29/wp29regs/2013/R054r3e.pdf>

11.2 Other European References

European Commission (2015), Commission staff working document "Better Regulation Guidelines", May 2015. SWD(2015) 111 final. Link: http://ec.europa.eu/smart-regulation/guidelines/docs/swd_br_guidelines_en.pdf

European Commission (2015), "Register of Commission Expert Groups and Other Similar Entities – Expert Group on Tyres Labelling, Market Surveillance Administrative Cooperation (E02808)", Tyres ADCO Website. Link:

<http://ec.europa.eu/transparency/regexpert/index.cfm?do=groupDetail.groupDetail&groupID=2808&Lang=EN>

European Commission, Joint Research Centre (JRC), 2014, Theodoros Grigoratos and Giorgio Martini, "Non-exhaust traffic related emissions. Brake and tyre wear PM", JRC Science and Policy Reports. Institute of Energy and Transport. EUR 26648 EN. ISBN 978-92-79-38302-1 (PDF). European Union, 2014. Link:

<http://publications.jrc.ec.europa.eu/repository/bitstream/JRC89231/jrc89231-online%20final%20version%202.pdf>

European Commission, Joint Research Centre (JRC), 2010, Institute for Environment and Sustainability, "International Reference Life Cycle Data System (ILCD) Handbook - General guide for Life Cycle Assessment - Detailed guidance". First edition March 2010. EUR 24708 EN. Luxembourg. Publications Office of the European Union, 2010. Link:

http://publications.jrc.ec.europa.eu/repository/bitstream/JRC48157/ilcd_handbook-general_guide_for_lca-detailed_guidance_12march2010_isbn_fin.pdf

European Commission (2014), "EU Energy in Figures statistical pocketbook 2014", European Union, 2014. ISBN 978-92-79-29317-7. Link:

http://ec.europa.eu/energy/sites/ener/files/documents/2014_pocketbook.pdf

European Commission (2014), "EU transport in figures, statistical pocketbook 2014", European Union, 2014. ISBN 978-92-79-37506-4. Link: <http://ec.europa.eu/transport/facts-fundings/statistics/doc/2014/pocketbook2014.pdf>

European Commission (2015), Commission Decision of 16.12.2015 "Appointment of Members of the Stakeholder group of the REFIT Platform", Brussels, 16.12.2015, C(2015) 9063 final. Link:

http://ec.europa.eu/smart-regulation/better_regulation/documents/c_2015_9063_en.pdf

European Environment Agency (2014), "Exposure to and annoyance by traffic noise", December 2014, Link: <http://www.eea.europa.eu/data-and-maps/indicators/exposure-to-and-annoyance-by-1/assessment>

European Commission (2014), "Frequently Asked Questions (Version 25/11/2014) for Regulation (EC) No 1222/2009 of the European Parliament and of the Council with regard to the wet grip grading of tyres, the measurement of rolling resistance and the verification

procedure". Link: http://ec.europa.eu/energy/sites/ener/files/documents/faq_-_tyre_labelling.pdf

European Policy Evaluation Consortium, EPEC (2008), "Impact Assessment study on possible energy labelling of tyres" and Annexes to the Impact Assessment, Specific contract: DG TREN No TREN/D3/375-2006 with GHK Consulting, Brussels, July 2008.

European Commission (2015), "Winter tyres – calendar and other mandatory conditions", Link: http://ec.europa.eu/transport/road_safety/observatory/doc/wintertyres_rules.pdf

European Commission Directorate-General for Energy, DGENER, (2014), "Administrative Cooperation for Market Surveillance Group Tyres Labelling ADCO Draft Minutes of the meeting of 25 November 2014 in Brussels", Brussels, 2014. Link: <http://ec.europa.eu/transparency/regexpert/index.cfm?do=groupDetail.groupDetailDoc&id=17816&no=2>

European Commission (2016), "Mobility and Transport Road Safety; Statistics – accidents data". Website last updated 04.03.2016. Link: http://ec.europa.eu/transport/road_safety/specialist/statistics/index_en.htm

European Commission (2016), "Website of ICSMS – the internet-supported information and communication system for the pan-European market surveillance". Website last updated 23.03.2016. Link: <https://webgate.ec.europa.eu/icsms/>

VHK and ARMINES (2015), "Ecodesign & Labelling Review Household Refrigeration" Preparatory/ review study Commission Regulation (EC) No. 643/2009 and Commission (Delegated) Regulation (EU) 1060/2010; Task 1-6 Report. November 2015. Link: http://www.eup-network.de/fileadmin/user_upload/2015/Household_Refrigeration_Review_TASK_1_6_DRAFT_REPORT_20151114.pdf

Van Holsteijn en Kemna B.V. - VHK (2014), "Ecodesign impact accounting – Part 1, Status Nov. 2013". For the European Commission under specific contract No. ENER/C3/412-2010/FV575-2012/12/SI2.657835. Delft, May 2014. Link: https://ec.europa.eu/energy/sites/ener/files/documents/2014_06_ecodesign_impact_accounting_part1.pdf

European Commission (2016), "Fuel savings calculator" Website last updated 23.03.2016. Link: <http://ec.europa.eu/energy/en/content/fuel-savings-calculator>

European Commission (2010), "Communication from the Commission to the European Parliament, the Council, the European Economic and Social Committee and the Committee of the Regions - Towards a European road safety area: policy orientations on road safety 2011-2020". Brussels, July 2010. COM(2010) 389 final. Link: http://ec.europa.eu/transport/road_safety/pdf/com_20072010_en.pdf

11.3 Data References

Tyres online and Energy GmbH (2015), Database extractions from year 2012-2015, Hämmerling Group, Germany. Dataset covering 2012-2015 with 30,000 tyres total. Link to main website: <http://www.tol-energy.de/>

Dutch Tyre and Wheel Trade Association, VACO (2015), Database extract from year 2013-2015, VACO, Netherlands. Dataset covering top seven tyre brands from 2013-2015 with 2,500 tyres total. Link to main website: <http://www.vaco.nl/>

Odyssee-Mure Project (2012), "Energy Efficiency Trends in Transport in the EU" Website. Co-ordinated by ADEME with the technical support of Enerdata, Fraunhofer, ISIS and ECN. Co-funded by the Intelligent Energy Europe Programme of the European Union. Link: <http://www.odyssee-mure.eu/publications/efficiency-by-sector/transport/>

Covenant of Mayors for Climate and Energy (2015), "Technical annex to the SEAP template instruction documents: Emission factors". Link: http://www.eumayors.eu/IMG/pdf/technical_annex_en.pdf

Polish Tyre Industry Association, PITA, "Public opinion survey: awareness of impact of tyres on safe driving and environmental protection", Millward Brown for the Polish Tyre Industry Association, October 2013. Link: http://ptia.org.pl/assets/files/publications/PTIA_report_en.pdf

GfK, Dutch consumer research with 1185 participants, summer 2014. According Pers. Comm. With Tim van der Rijken, Trade association for the tyre and wheel sector in the Netherlands, VACO (e-mail received December 23rd 2015).

11.4 Industry stakeholder References

European Tyre and Rubber Manufacturers' Association, ETRMA (2016), "European Tyre & Rubber Industry; Statistics Edition 2015". Link: <http://www.etrma.org/uploads/documents/Statistics%20booklet%20-%20edition%202015.pdf>

European Tyre and Rubber Manufacturers' Association, ETRMA (2015), "ETRMA Position paper on circular economy – Bringing about a resource efficient and competitive Europe". Brussels, September 2015. Link: http://www.etrma.org/uploads/Modules/Newsroom/2015-09-29_etrma-position-paper-on-circular-economy_vf.pdf

European Tyre and Rubber Manufacturers' Association, ETRMA (2015), "Q&A on PM emissions and Tyre and Road Wear Particles". Brussels, 4 June 2015.

European Tyre and Rubber Manufacturers' Association, ETRMA (2011), "Retreading" Website last updated 2011. Link: <http://www.etrma.org/tyres/retreading>

International Tyre Manufacturers' Association (2014), "Europe's Importers show the way", November 18th 2014. Link: <http://www.itma-europe.com/2014/11/europes-importers-show-the-way/>

MV2 Conseil on behalf of Goodyear (2013), Truck fleet survey with around 500 truck fleets from France, Germany, Italy, Poland and Spain. Link: http://www.fleetfirst.eu/ff_home_en/news/goodyear-fleet-survey-reveals-growing-influence.jsp

IPSOS on behalf of Goodyear (2015), "Consumer Research on Winter Tire Understanding via the EU Tire Label", Assessment of the final research carried out by IPSOS. June 2015.

VACO, Trade association for the tyre and wheel sector and ReTyre project, "Retreaded tyres – First choice", Netherlands, 2015. Link: http://www.better-tyres-now.eu/wp-content/uploads/2016/03/VernieuwdeBanden_ENG-final-LR.pdf

Lennart Lomaeus, chairman of DFTF Sweden (Swedish Tyre, Rim & Accessories Suppliers Association) (2015), Presentation: "Winter tyre Market's segments evolution in the Nordic countries".

Lease Europe (2013), "The Ranking of Top European Leasing Companies, 2013". Link: http://www.leaseurope.org/uploads/documents/ranking/Leaseurope%20Ranking%20Survey%202013_public.pdf

Lease Europe (2011), "The European Leasing & Automotive Rental Markets – State of Play". Presentation by Jurgita Bucyte (Advisor in Statistics and Economic Affairs in Lease Europe) at Leaseurope's 2011 Seminar. Link: http://www.leaseurope.org/uploads/documents/events/seminar_for_lessors/2011/Jurgita%20Bucyte_WEB.pdf

Retyre (2014), Main website. Link: <http://www.retyre-project.eu/>

Jarmo Sunnari Manager in Nokian Tyres (2015), presentation: "Consumer information on tyre wet grip vs. Ice grip – implications in road safety in Nordic winter", November 2015.

Michelin North America (2016), "Tire Comparison" website. Link: <http://www.michelin.ca/tire-selector/size/215/65/16/false/B/0/compare-tires>

Bipaver (2015), Presentation "Global Retread Symposium 2015 Predictive tool", presented by Bipaver, Las Vegas, November 4th 2015.

11.5 Other Stakeholder References

TNO (Netherlands Organisation for Applied Scientific Research) (2014), Memorandum to Ministry of Infrastructure and Environment, "Potential benefits of Triple-A tyres in the EU", Link: <http://www.unece.org/fileadmin/DAM/trans/doc/2014/wp29grb/GRB-60-13e.pdf>

VTT (Technical Research Centre of Finland Ltd) (2013), "Technology 133: Comprehension of grip labels on unstudded winter tyres and tyre selection". Link: <http://www.vtt.fi/inf/pdf/technology/2013/T133.pdf>

ACEA, European Automobile Manufacturers Association, (2016), "Who we are" general website. Link: <http://www.acea.be/about-acea/who-we-are>

CECRA, The European Council for Motor Trades and Repairs (2016), "About CECRA", General website. Link: <http://www.cecra.eu/page/about>

STRO, The Scandinavian Tire & Rim organisation (2016), "Winter tyres – download of latest updated lists of winter tyres for cars and trucks". Link: <http://stronordic.com/information-2/winter-tyres/>

ETRTO and Informal Working Group for Snow and Ice conditions of Tyres "Status of Ice Test Method Development of Tyre Industry, ETRTO", Minutes from workshop held December 4th 2014.

The AIR Group, ANEC, EURO CITIES and Transport & Environment (2015), "Inclusion of additional parameters in the impact assessment study on the EU Tyre Label" Letter addressed to Mr Hodson and Mr Moreno Acedo, DG ENER, may 18th 2015. See Appendix 8.

11.6 Literature References

Braungardt, S., Molenbroek, E., Smith, M., Willian, R., Attali, S., McAlister, C. (2014), "Impact of Ecodesign and Energy/Tyre Labelling on R&D and Technology Innovation". For the European Commission by Fraunhofer ISI, Ecofys Triple E Consulting, Sea Green Tree, and SoWatt. Project number: DESNL13606. Link: <http://www.ecofys.com/files/files/fraunhofer-ecofys-2014-impact-of-ecodesign-energy-labelling-on-innovation.pdf>

Van Holsteijn en Kemna B.V. - VHK (2014), "Ecodesign impact accounting – Part 1, Status Nov. 2013". For the European Commission, Specific contract No.: ENER/C3/412-2010/FV575-2012/12/SI2.657835. Link:

https://ec.europa.eu/energy/sites/ener/files/documents/2014_06_ecodesign_impact_accounting_part1.pdf

Miljømærkning Danmark (Ecolabel Denmark) (2013), "kendskab til Mærkerne", (in English: "Knowledge of the labels"). Link: <http://www.ecolabel.dk/da/blomsten-og-svanen/kendskab-til-maerkerne>

Sienkiewicz, M., Kucinska-Lipka, J., Janik, H., Balas, A. (2012), "Progress in used tyres management in the European Union: A review", Waste Management Vol. 32 No. 10 pp 1742-1751, October 2012. Link:

<http://www.sciencedirect.com/science/article/pii/S0956053X1200219X>

Boustani, A. (2007), "Remanufacturing and Energy Savings" B.S. University of California Berkely, Massachusetts Institute of Technology. Link:

<http://web.mit.edu/ebm/www/Publications/reman-est.pdf>

Heikki Tervahattu (2006), Presentation: "Forskning på støy og støv i Finland", for the Norwegian Public Roads Administration, Trondheim September 2006. Link:

http://www.vegvesen.no/attachment/60891/binary/13164?fast_title=Forskning+p%C3%A5+st%C3%B8y+og+st%C3%B8v+i+Finland+%28p%C3%A5+engelsk%29

11.7 Personal Communication References

Lennart Lomaeus, DFTF, Tyre Manufacturers Association in Sweden (2014), Presentation: "Winter tyre Market's segments evolution in the Nordic countries 2013-2014" Held at Meeting of the working group for snow and ice conditions of tyres, 4th March 2015, ETRMA-office, Brussels.

Lennart Lomaeus, DFTF, Tyre Manufacturers Association in Sweden (2016), e-mail received march 22nd 2016, "VB: VB: tyre review study – Draft Final Report for commenting".

ETRMA (2015), "Phone meeting with ETRMA, ETRTO and Commission on retreading". Attendants: Fazilet Cinaralp (ETRMA), JC Noirhomme (ETRTO), Jean-Dominique Perrot (Michelin), Francesca de RSI (Pirelli), Gianluca Tosatti (Bridgestone), Juan Moreno Acedo (DGENER). Held November 13th 2015.

ETRMA and industry members (2015), Industry stakeholder meeting, ETRMA offices, Brussels, held September 28 2015.

Ruud Spuijbroek, Secretary at Bipaver (2015), personal communication on email September 16th 2015.

Bandvulc tyres (2015), "Comments from Bandvulc with regards to Stakeholder meeting Friday 20th November 2015", received by e-mail on November 23 2015.

Michelin (2015), "Background information on snow and ice tyres", received on meeting October 20 2015, Viegand Maagøe offices, Copenhagen.

Desmond Collin (Continental Tyres), e-mail received November 2nd 2015 "Re: cost estimate of tyre mileage test".

David Gallegos (IDIADA), e-mail received December 14th 2015, "Re: Updates on UTQG test".

Mattias Hjort, researcher at VTI, Statens väg- och transportforskningsinstitut, Sweden (2015), e-mail received November 16th 2015 "SV: Questions regarding winter tyres and the EU tyre label".

11.8 Other References

Kragh, J., Oddershede, J. (2013), "NordTyre – Car tyre labelling and Nordic traffic noise" Internoise, September 2013, Innsbruck Austria. Link: <http://www.stoysvakedekk.no/wp-content/uploads/2014/02/0265.pdf>

Tyrereviews (2015), "2015 test World Summer Tyre Test" Website. Link: <http://www.tyrereviews.co.uk/Article/2015-Test-World-Summer-Tyre-Test.htm>

Consumentenbond (2013), "Bandenlabel wijkt af van testresultaat zomerbanden" (English: "Band Label differs from summer tires test result"), February 2013. Link: <http://www.consumentenbond.nl/actueel/nieuws/nieuwsoverzicht-2013/zomerbandentest/>

Winther, A., Oponeo (2015), "How much does a tyre weigh?" Website article, August 18th 2015. Link: <http://www.oponeo.co.uk/tyre-article/how-much-does-a-tyre-weigh>

Commercial Motor (2013), "The Ronseal approach", October 10th 2013 pp 32-35. Link: <http://archive.commercialmotor.com/article/10th-october-2013/32/the-ronseal-approach>

Rubbernews (2011), "R&D Spending trends" website last updated September 2011. Link: <http://www.rubbernews.com/article/TB/20110901/STATISTICS/121019921/rd-spending-trends>

Danish transport and Construction Agency (2009), "Tænk over dækvalg og hastighed", (English: "Think about tyre choice and speed"). Link: <http://www.trafikstyrelsen.dk/DA/Presse/Nyhedsarkiv/Syn-og-koeretoer/2009/10/T%C3%A6nk-over-d%C3%A6kvalg-og-hastighed.aspx>

Transportstyrelsen, Sweden (2016), "Vinterdäck" (English: "Winter tyres"). Link: <https://www.transportstyrelsen.se/sv/vagtrafik/Fordon/Fordonsregler/dack/Vinterdack/>

U.S. Department of Transportation and National Highway Traffic Safety Administration, "Federal Motor Vehicle Standards and Regulations", Link: <http://www.nhtsa.gov/cars/rules/import/FMVSS/>

United States Department of Transportation (2009). "NHTSA proposes consumer-friendly tire efficiency labelling". June 19 2009. Link: <http://usdotblog.typepad.com/secretarysblog/2009/06/nhtsa-proposes-consumerfriendly-tire-efficiency-labeling.html#.VfqzvxHtmko>

National Highway Traffic Safety Administration, NHTSA, "§575.10449 CFR Ch. V (10–1–11 Edition)". Authenticated U.S. Government Information. Link: <https://www.gpo.gov/fdsys/pkg/CFR-2011-title49-vol7/pdf/CFR-2011-title49-vol7-sec575-104.pdf>

ISO (2014), "ISO 14956:2002 Air Quality – Evaluation of the suitability of a measured procedure by comparison with a required measurement uncertainty". Link: http://www.iso.org/iso/home/store/catalogue_tc/catalogue_detail.htm?csnumber=26036

UNECE, (2016) PMP 38th session, PowerPoint presentation "PMP-38-04 PMP Non_ Exhaust_ emissions". Link: <https://www2.unece.org/wiki/display/trans/PMP+38th+session>

United States Environmental Protection Agency, Office of Air and Radiation (2012), "EPA Verified Low Rolling Resistance Tires Interim Performance Requirements for Retread Products Effective June 11, 2012", Link:

<http://www3.epa.gov/smartway/forpartners/documents/verified/retread-perform-req.pdf>

ISO (2009), "ISO 28580:2009 – Passenger car, truck and bus tyres – methods for measuring rolling resistance – single point test and correlation of measurement results". Link:

http://www.iso.org/iso/catalogue_detail?csnumber=44770

TM, Tekniikan Maailma, (technology World) Finland (2015), "Comparison test: Winter tyres 2016". Link: <http://tekniikanmaailma.fi/winter-tyres-2016>

Ottesen, K., Gjerstad, K.I., and Snilsberg, B. (2015), "Studded tyres and air quality in Norway", Eden Group meeting 25th September 2015. Statens vegvesen Vegdirektoratet. Link:

<http://stro.se/wp-content/uploads/2015/10/Vegdirektoratet-presentation-of-VTI-test-EDEN-Group-meeting-25.09.25.pdf>

Michels, S., Head of Fleet Testing Goodyear S.A. (2015), "Over-run Task Force: Improvement of test method accuracy". EDEN-group meeting called by Statens vegvesen Vegdirektoratet Oslo, 25th of September 2015. Link:

<http://stro.se/wp-content/uploads/2015/10/Task-Force-presentation-of-over-run-test-EDEN-Group-meeting-25.09.15.pdf>

UNECE (2012), "Particle Measurement Programme (PMP)" Website. Last edited by Martin Dagan June 2012. Link:

<https://www2.unece.org/wiki/pages/viewpage.action?pageId=2523173>

MTD, Modern Tire Dealer (2015), "Global Retread Symposium: U.S. Retreaders Are Not Alone in Dealing With Tier 4 Imports", Link: <http://www.moderntiredealer.com/news/411298/global-retread-symposium-u-s-retreaders-are-not-alone-in-dealing-with-tier-4-imports>

Appendix 1 – Results from consumer survey



Project specifications

Target group: The survey is conducted among 18-70 year old car owners in:

- Sweden
- Finland
- United Kingdom
- Germany
- France
- Italy

Method: Online survey, the survey is conducted in Userneeds' panels in Sweden and Finland and Userneeds' partner panels in United Kingdom, Germany, France and Italy.

Number of interviews: In total 6051 interviews have been completed.

- 1011 in Sweden
- 1015 in Finland
- 1002 in United Kingdom
- 1007 in Germany
- 1008 in France
- 1008 in Italy

Average interview time: 7,5 minutes

Period of data collection: 2nd of October 2015 to 19th of October 2015

Agenda




Background

- All car owners
- Buyers of new tyres for passenger car 2013-2015
- Buyers of new (not used) passenger car 2013-2015


userneeds

What is your gender?

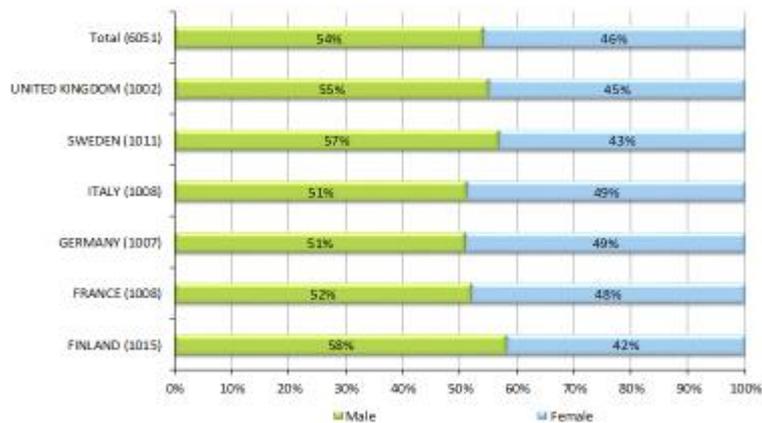

userneeds


How old are you?

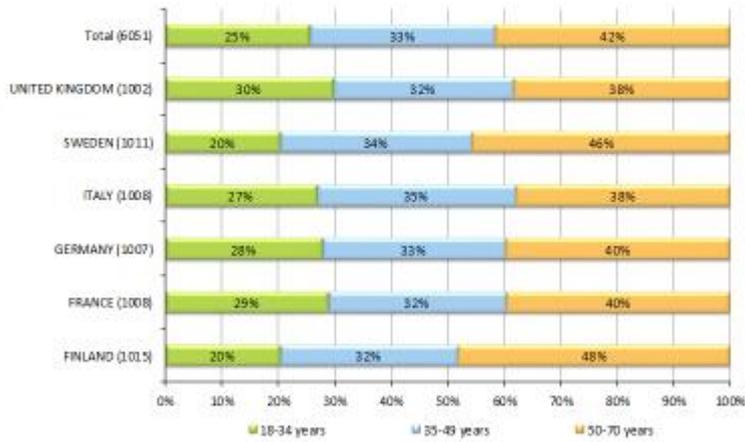

useneeds


Do you own a passenger car?

(Leased car, carpool and suchlike are NOT included)

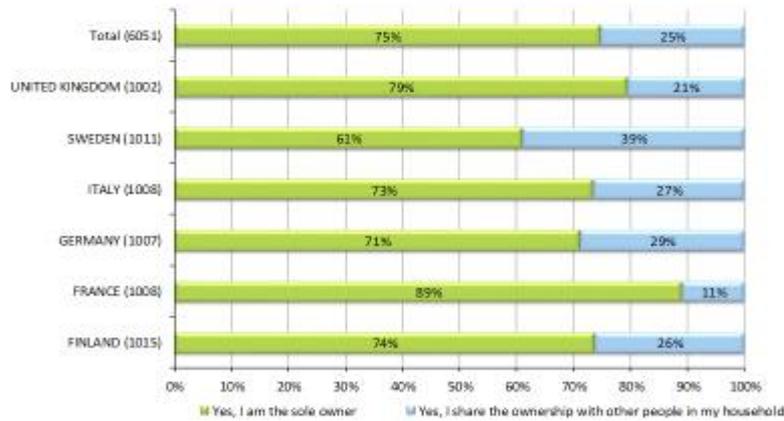


useneeds

When was the last time you purchased new (not used) tyres for a passenger car (without purchasing a car at the same time)?

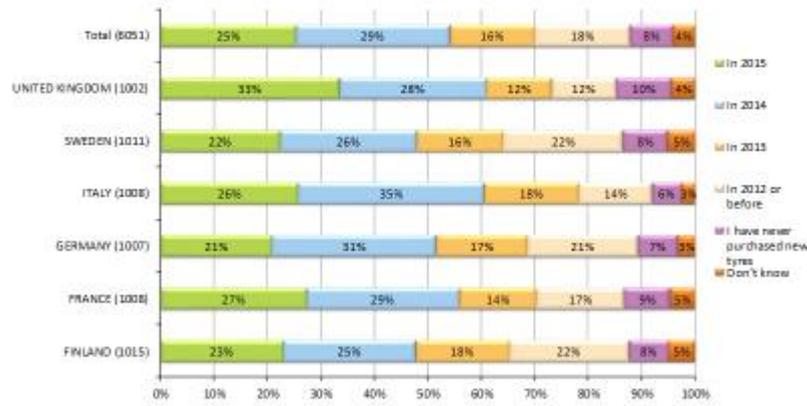

useneeds

When was the last time you purchased a new (not used) passenger car?

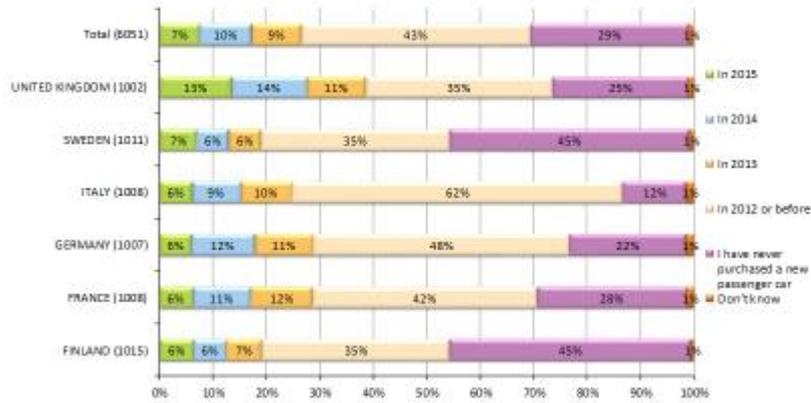

useneeds


Agenda



- Background

All car owners


- Buyers of new tyres for passenger car 2013-2015
- Buyers of new (not used) passenger car 2013-2015



What is your level of responsibility regarding the activities listed below?




Purchase of car

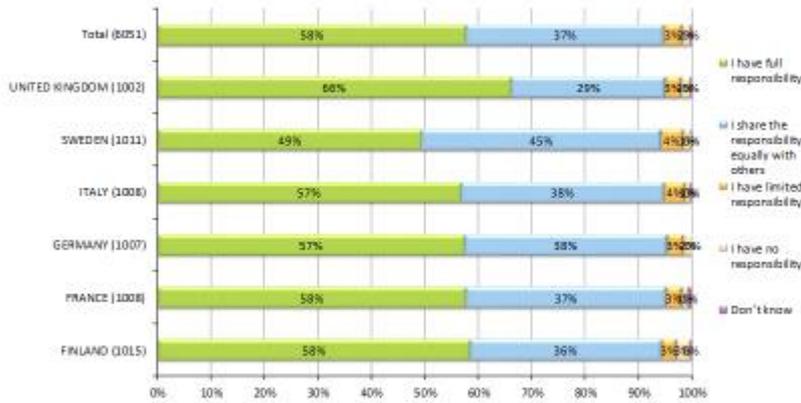

What is your level of responsibility regarding the activities listed below?


Purchase of tyres

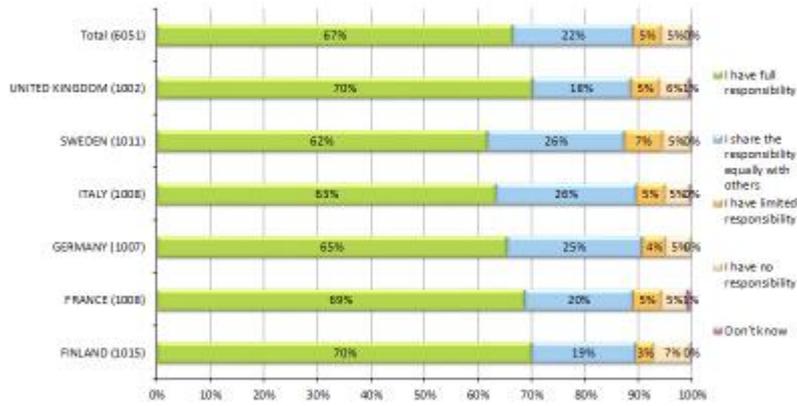

useneeds

What is your level of responsibility regarding the activities listed below?


General maintenance of tyres (for instance changing from summer to winter tyres and checking tyre pressure)

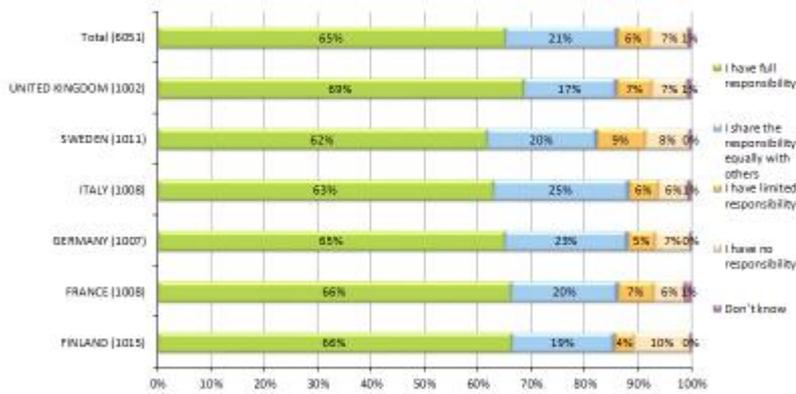

useneeds


Please specify all types of tyres you have for your car.

Please indicate all those that apply

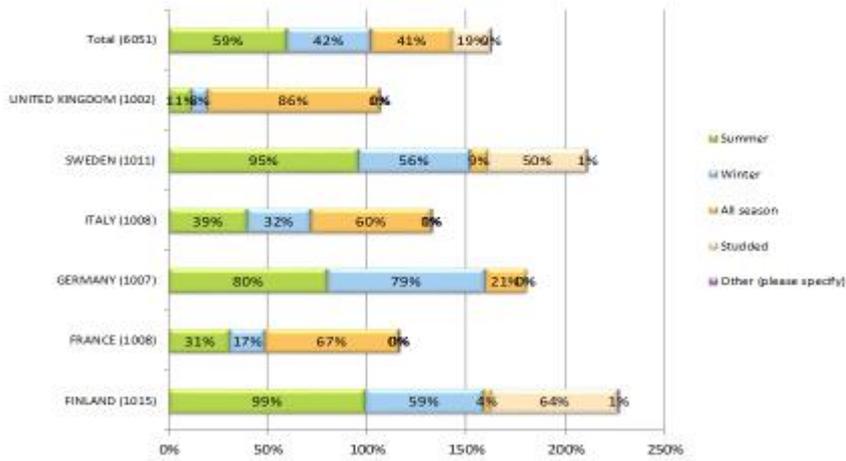


useneeds

Were you aware of the tyre label below before you began this questionnaire?

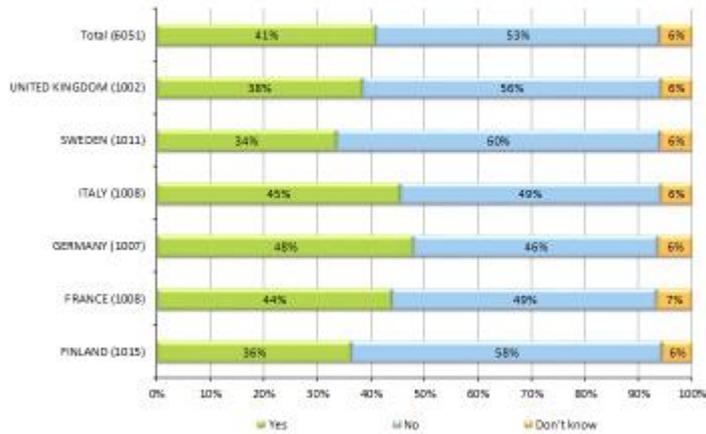


useneeds

According to the rules, the label should be displayed in the shop as a sticker on the tyre tread or as a printed label placed near the tyres.
Which way do you think the tyre label is most visible?

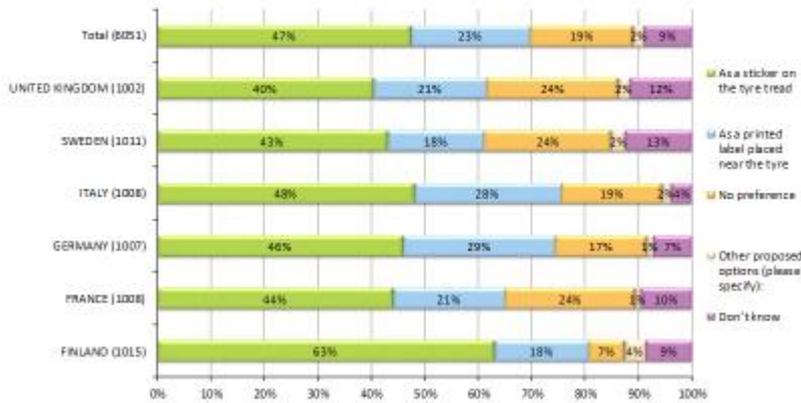


useneeds

The label includes information about three basic tyre performance areas. Each of the performance areas are illustrated by a blue icon on the label.
Please indicate what you think is meant by the blue icon in the picture below (Q3a).

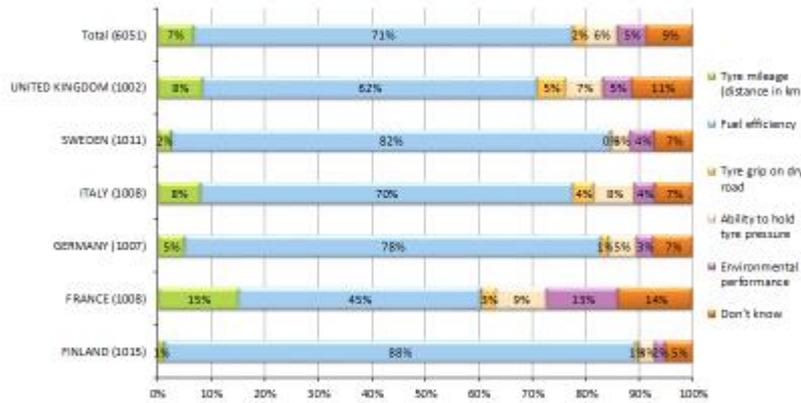


useneeds

How well the tyre is performing with respect to the relevant performance area is indicated on a scale from A-G or by waves.
Please indicate how well you think the tyre is performing with regard to the performance area in question (Q3aa).

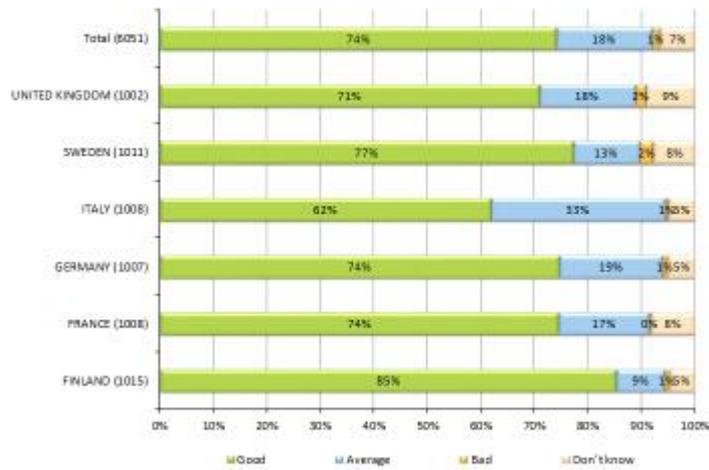


useneeds

The label includes information about three basic tyre performance areas. Each of the performance areas are illustrated by a blue icon on the label.
Please indicate what you think is meant by the blue icon in the picture below (Q3b).

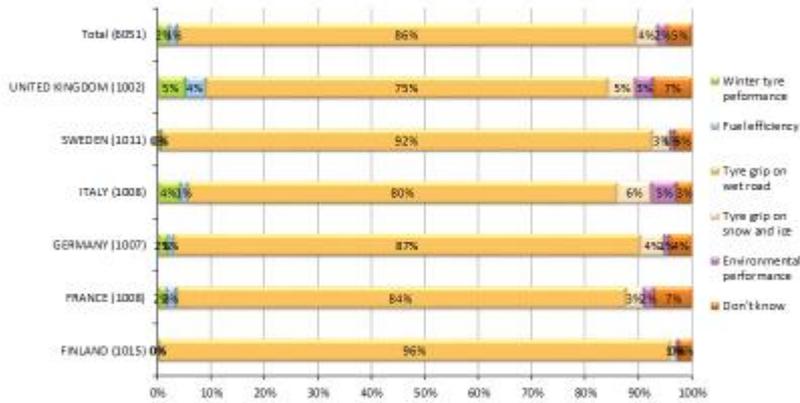


useneeds

The label includes information about three basic tyre performance areas.
 Each of the performance areas are illustrated by a blue icon on the label.
 Please indicate what you think is meant by the blue icon in the picture below (Q3c).

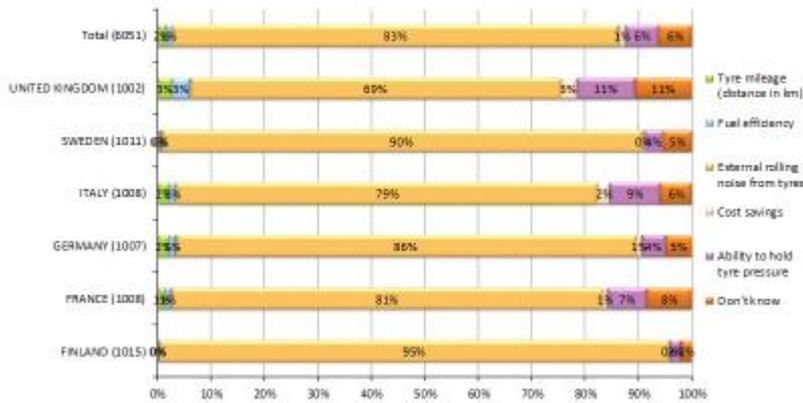

useneeds


How well the tyre is performing with respect to the relevant performance area is indicated on a scale from A-G or by waves.
 Please indicate how well you think the tyre is performing with regard to the performance area in question (Q3cc).

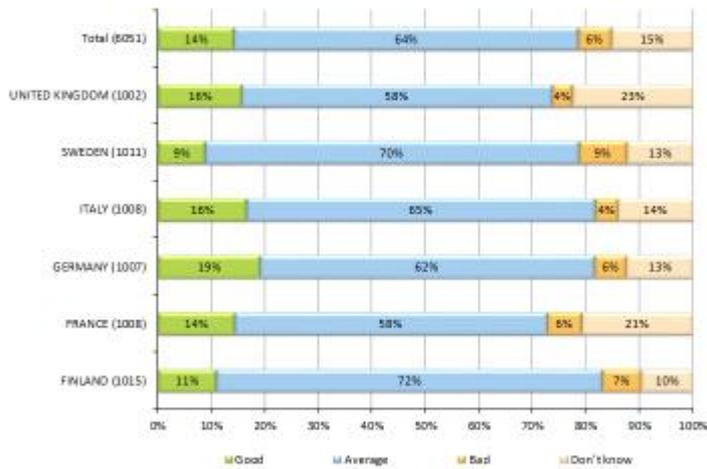

useneeds

The icons refer respectively to fuel efficiency, tyre grip on wet road and external rolling noise. Do you find the icons and the information on the label easy to understand?


I find the information about fuel efficiency easy to understand

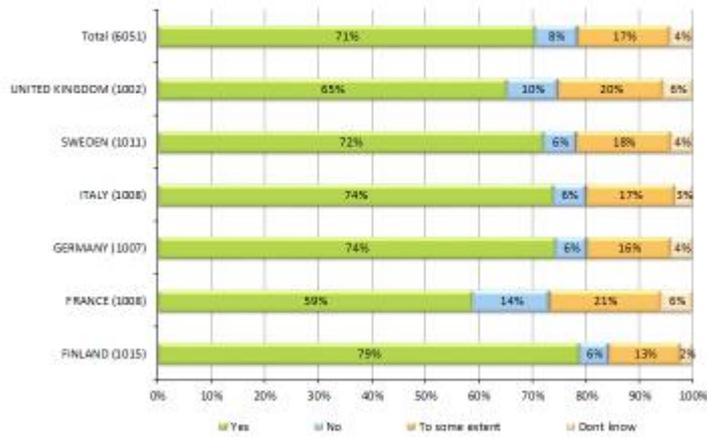

useneeds

The icons refer respectively to fuel efficiency, tyre grip on wet road (wet grip) and external rolling noise. Do you find the icons and the information on the label easy to understand?


I find the information about wet grip easy to understand

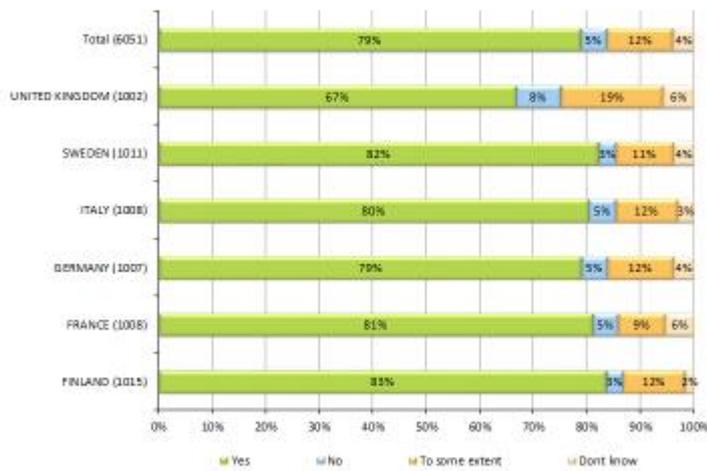

useneeds

The icons refer respectively to fuel efficiency, tyre grip on wet road and external rolling noise. Do you find the icons and the information on the label easy to understand?


I find the information about external rolling noise easy to understand

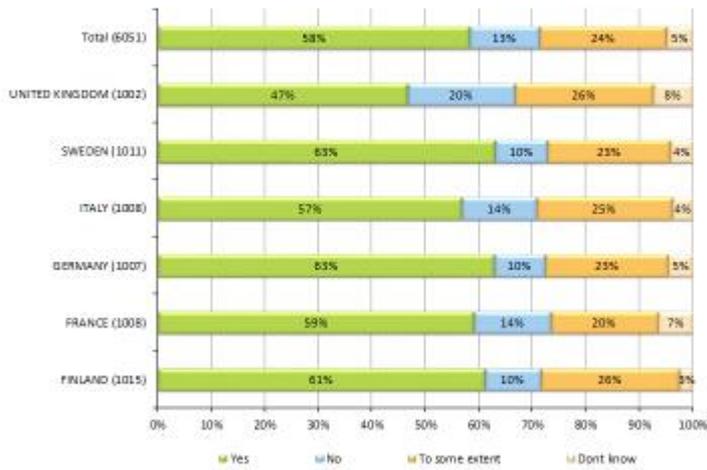

useneeds

How important would the following tyre performance areas be to you, if you were to buy new tyres?


Tyre price

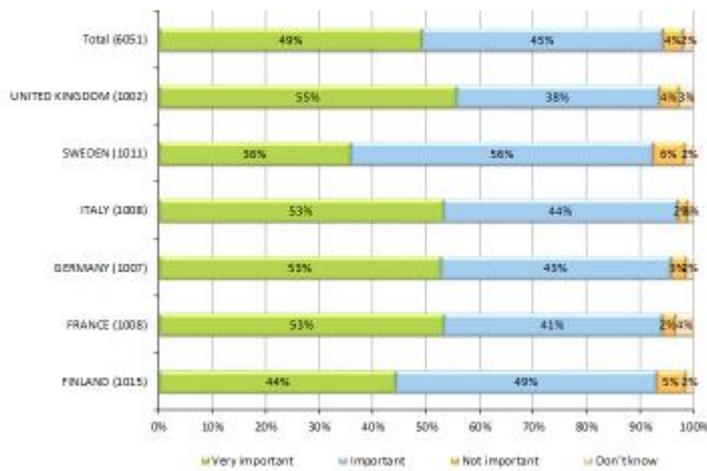

useneeds

How important would the following tyre performance areas be to you, if you were to buy new tyres?


Tyre brand

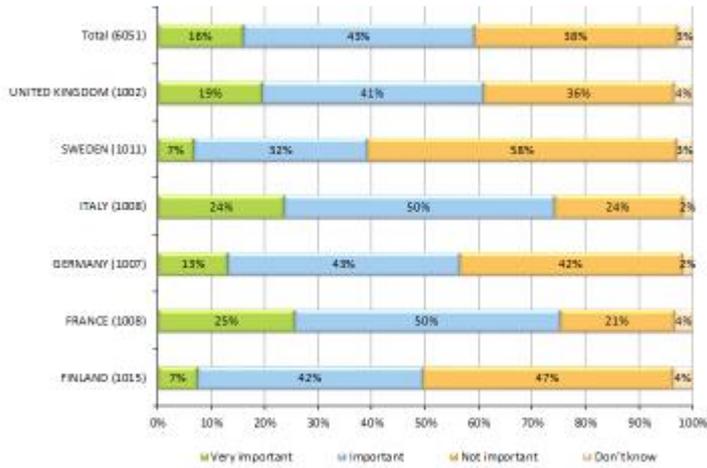

useneeds

How important would the following tyre performance areas be to you, if you were to buy new tyres?


Fuel efficiency

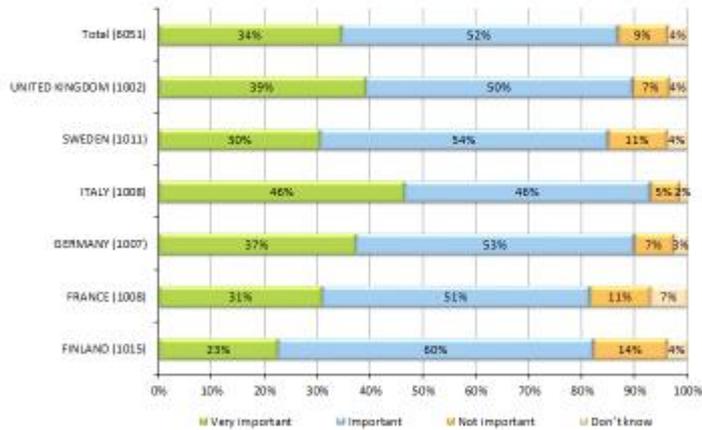

useneeds

How important would the following tyre performance areas be to you, if you were to buy new tyres?


Tyre grip on wet road

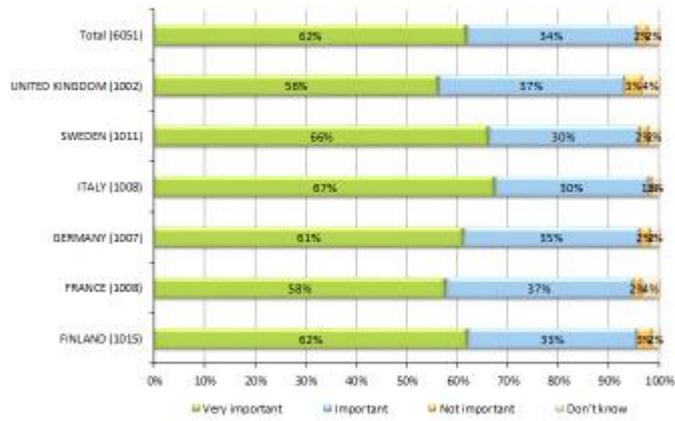

useneeds

How important would the following tyre performance areas be to you, if you were to buy new tyres?


Tyre grip on snow and ice

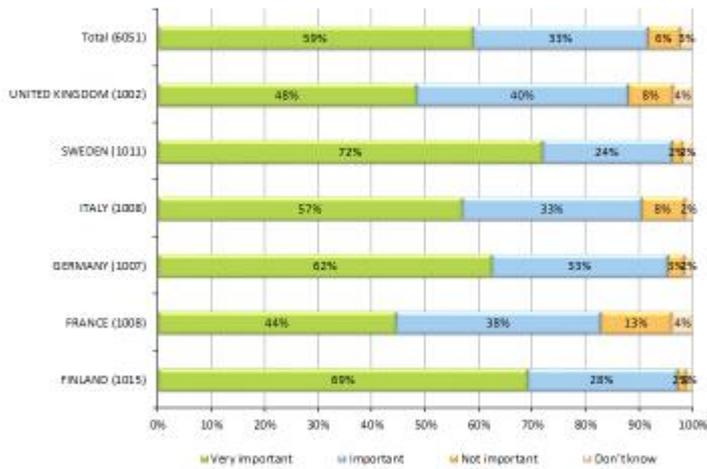

useneeds

How important would the following tyre performance areas be to you, if you were to buy new tyres?


External rolling noise

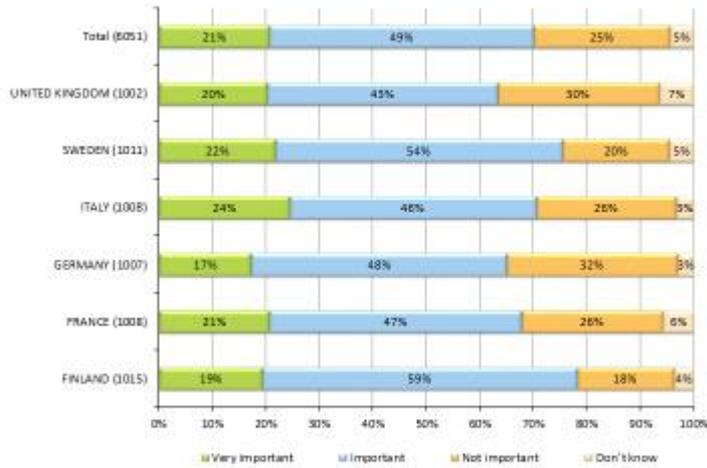

useneeds

How important would the following tyre performance areas be to you, if you were to buy new tyres?


Tyre mileage (distance in km)

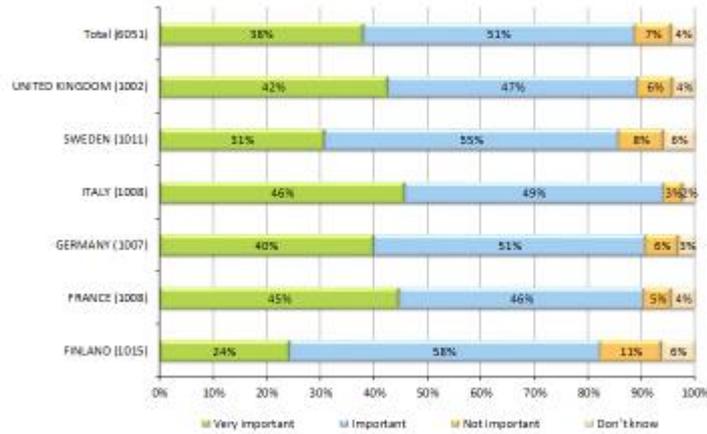

useneeds

How important would the following performance areas be to you, if you were to buy studded tyres:


Tyre price

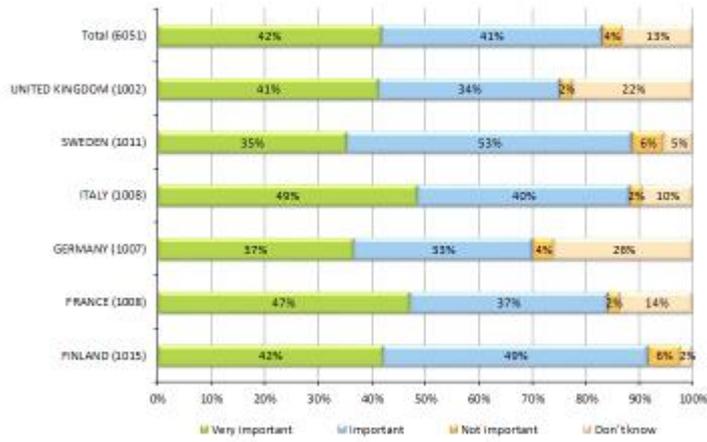

useneeds

How important would the following performance areas be to you, if you were to buy studded tyres:


Tyre brand

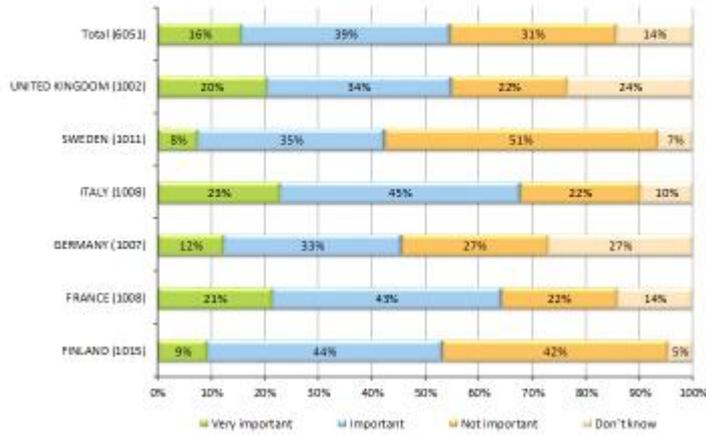

useneeds

How important would the following performance areas be to you, if you were to buy studded tyres:


Fuel efficiency

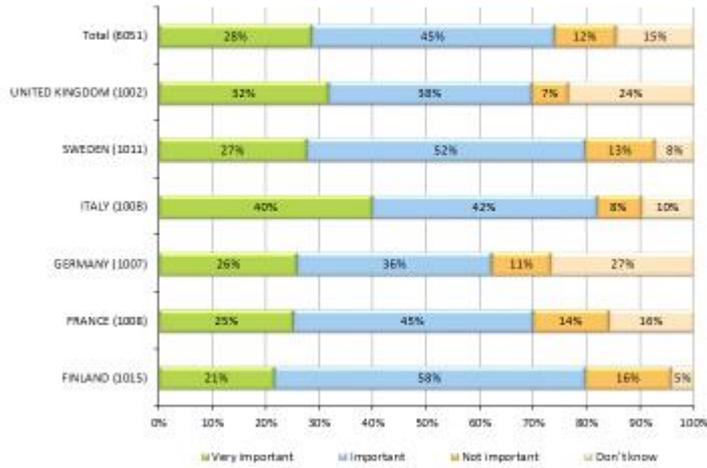

useneeds

How important would the following performance areas be to you, if you were to buy studded tyres:


Tyre grip on wet road

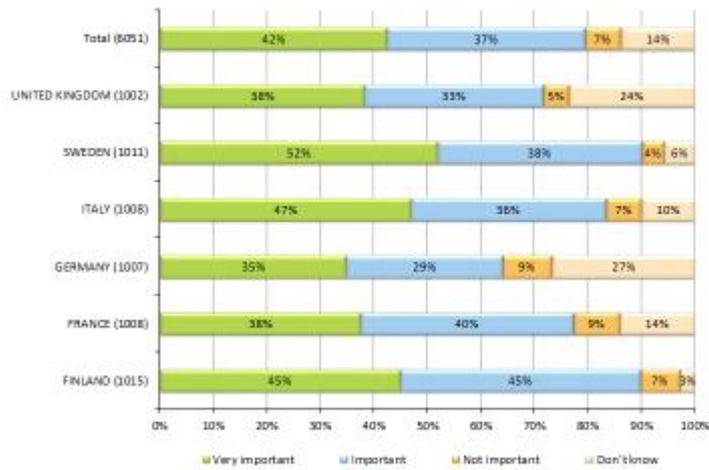

useneeds

How important would the following performance areas be to you, if you were to buy studded tyres:


Tyre grip on snow and ice

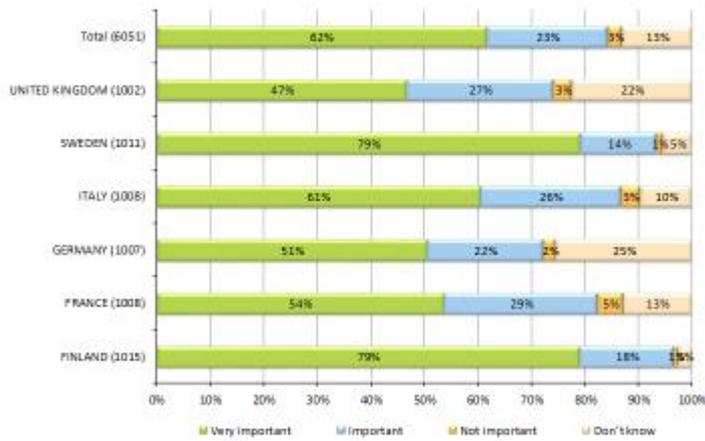

useneeds

How important would the following performance areas be to you, if you were to buy studded tyres:


External rolling noise

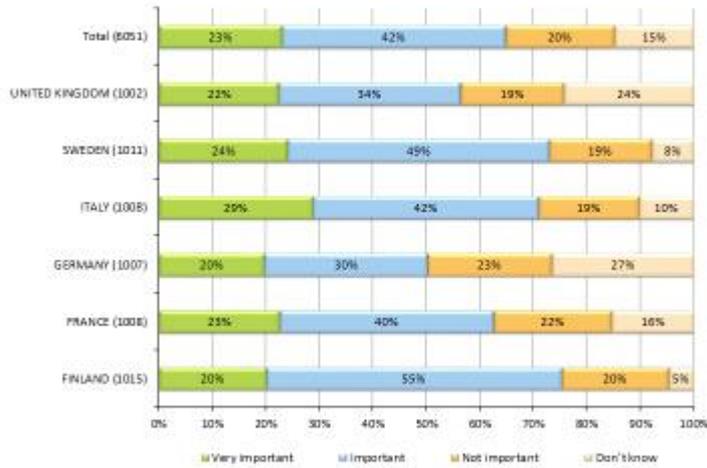

useneeds


How important would the following performance areas be to you, if you were to buy studded tyres:

Tyre mileage (distance in km)

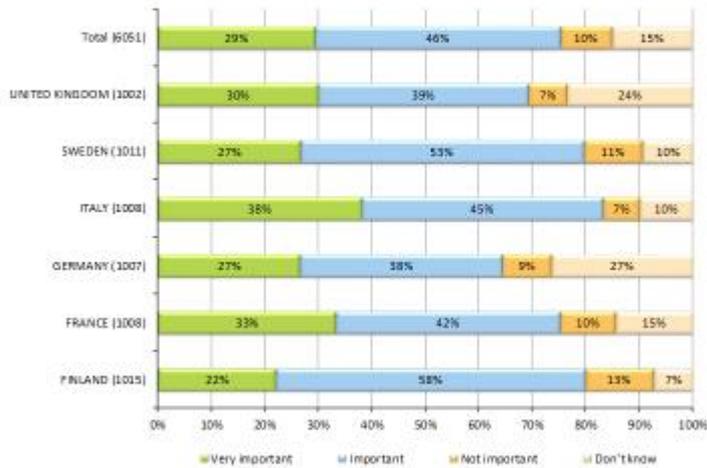


useneeds

Which of the tyre performance areas on the label is the most important for you?

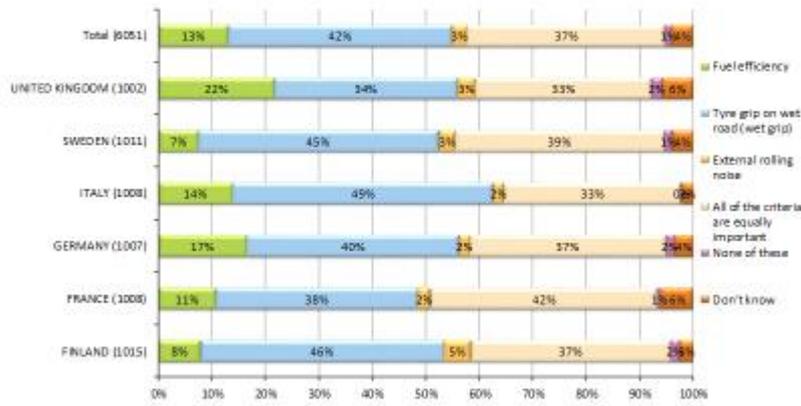


useneeds

At your last tyre purchase, what was the most important factor in your choice of purchase?

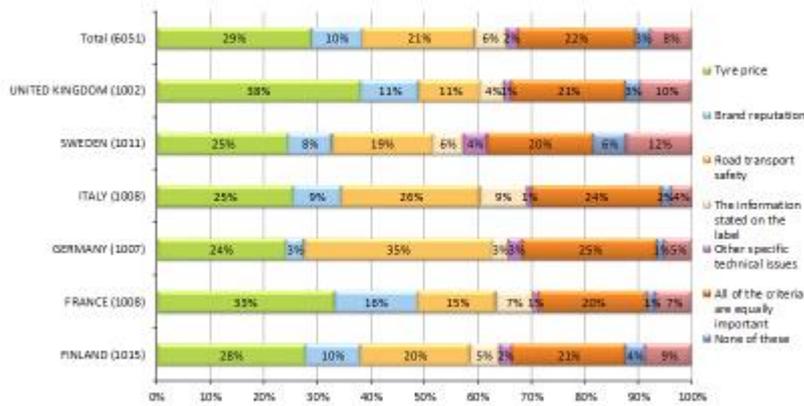


useneeds

How useful do you find the information on the tyre label?

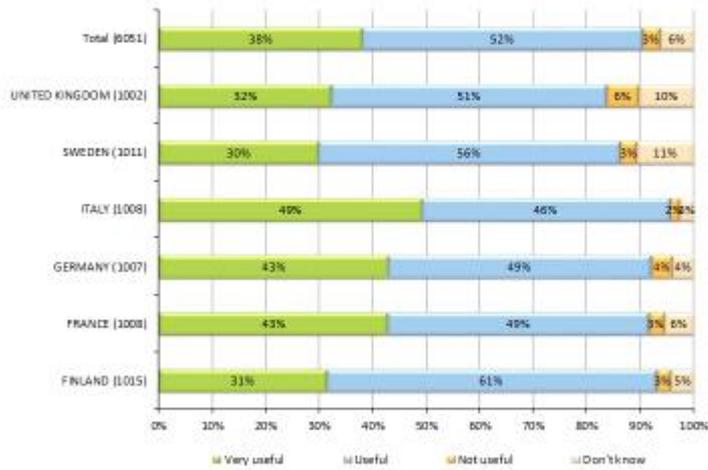


useneeds

Is there any information or are there any performance areas missing in the current labelling scheme in your opinion?

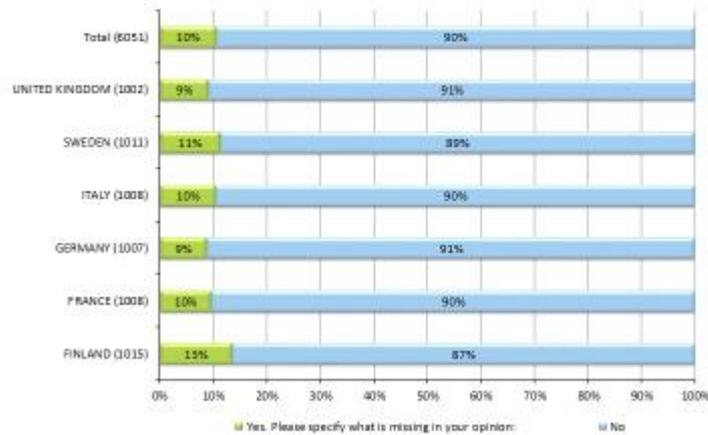


useneeds

Today information about mileage (distance in km) and tyre grip on snow and ice is not currently shown on the label. How important is it for you to have this information on the label?
Information about mileage

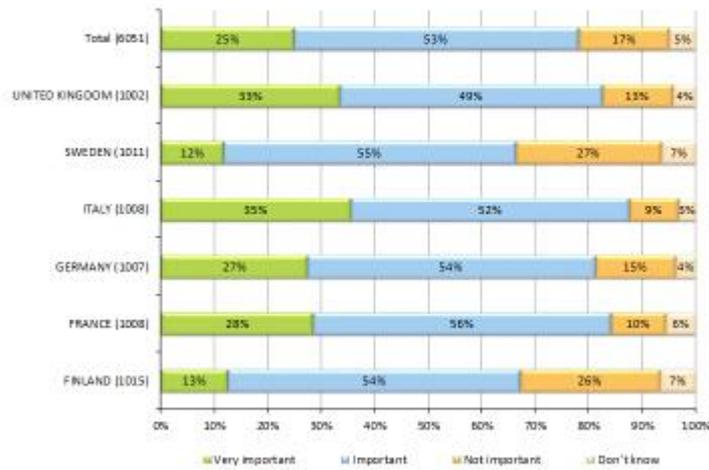


useneeds

Today information about mileage (distance in km) and tyre grip on snow and ice is not currently shown on the label. How important is it for you to have this information on the label?
Information about grip in snowy or icy conditions

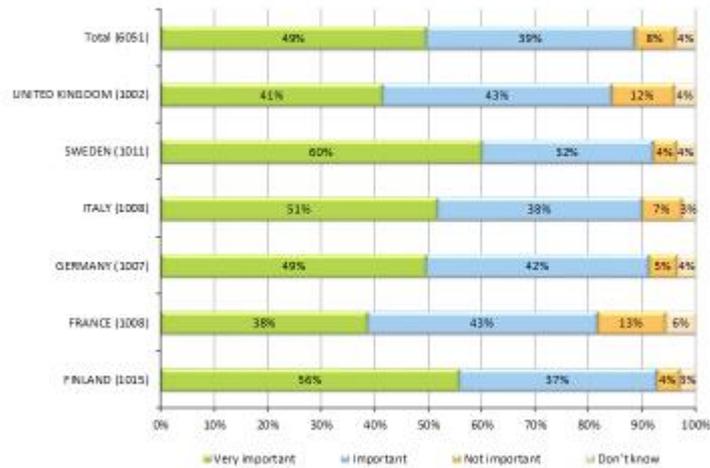


useneeds

Currently studded tyres are not covered by the labelling scheme (they are not sold with the label). Would you like to have studded tyres included in the scheme?

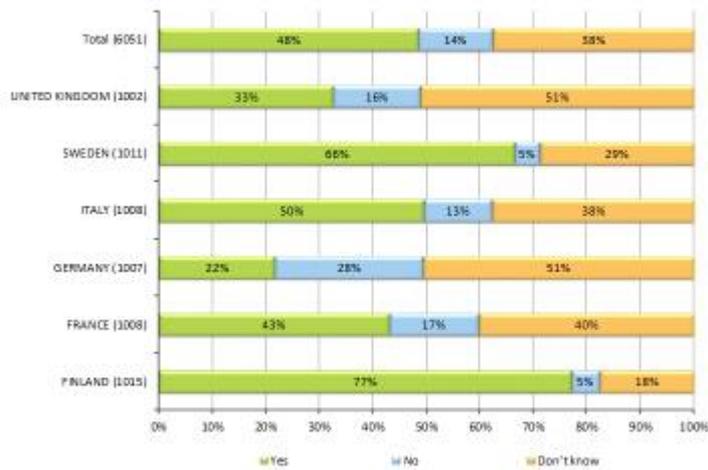


useneeds

To what extent do you have confidence in the information provided by the tyre label?

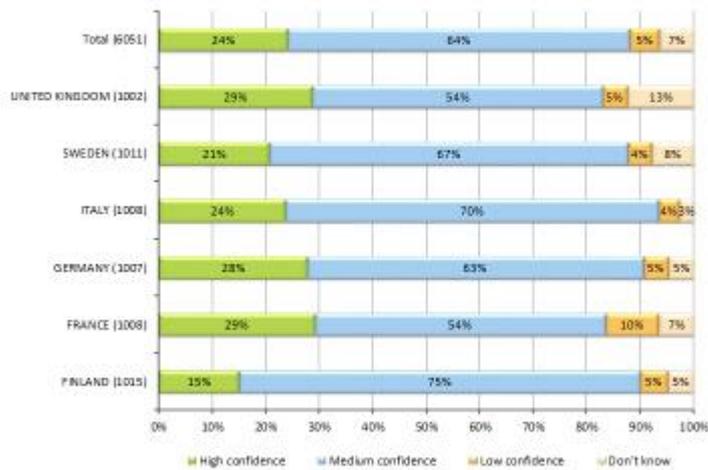

useneeds


If your confidence in the label were higher, would the label have more influence on your purchase decision?

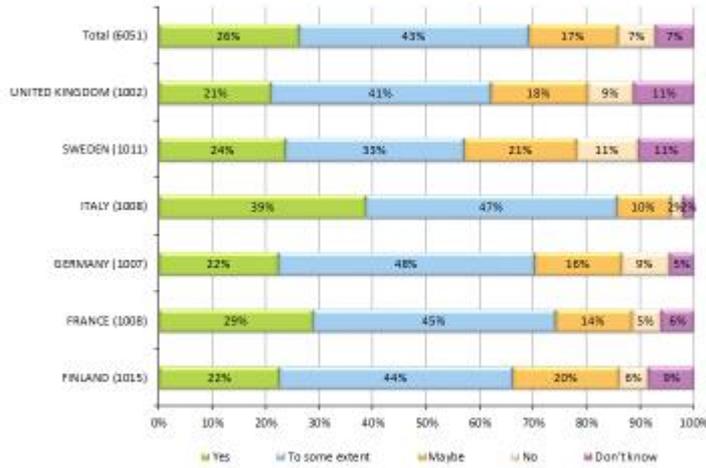

useneeds


How could your confidence in the labelling scheme be improved?

Please select all those that apply.

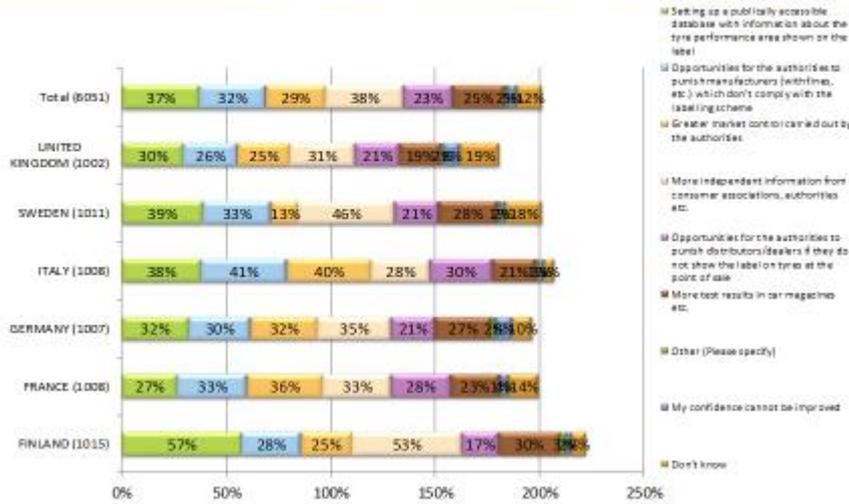


useneeds

If a public database were to be established with information on tyre performance areas shown on the label, would you use the database to search for information when purchasing new tyres in the future?

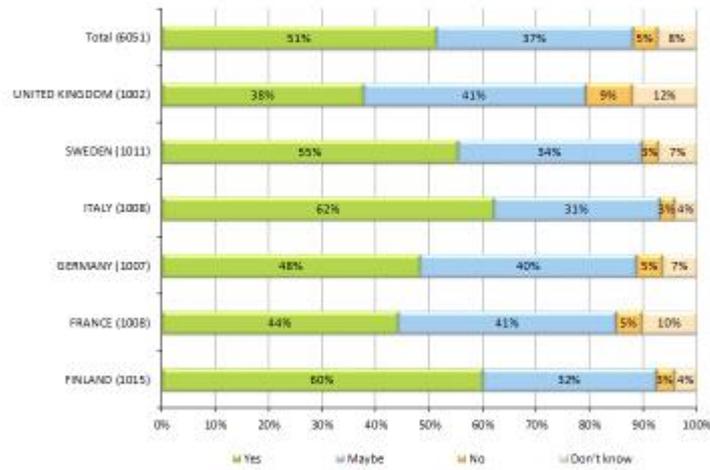

useneeds

Do you expect to buy tyres on the internet in the future?

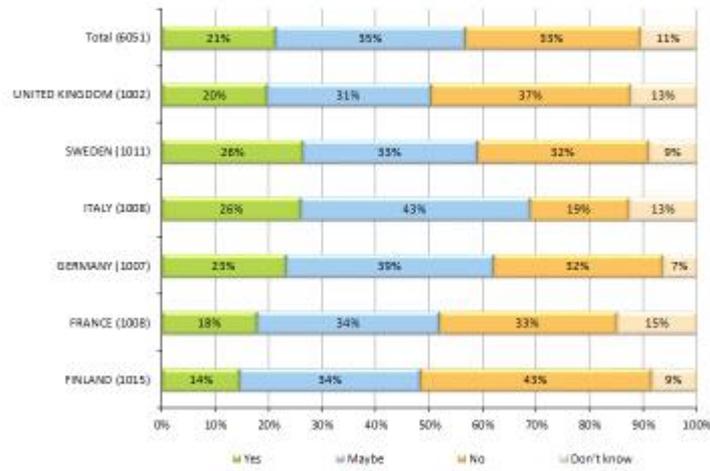

useneeds

Agenda


- Background
- All car owners

Buyers of new tyres for passenger car 2013-2015

- Buyers of new (not used) passenger car 2013-2015


useneeds

What type of tyres did you buy?

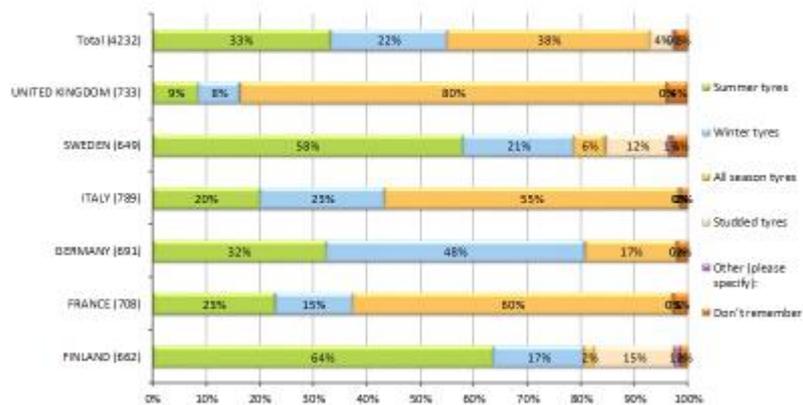


useneeds

Where did you purchase the tyres?

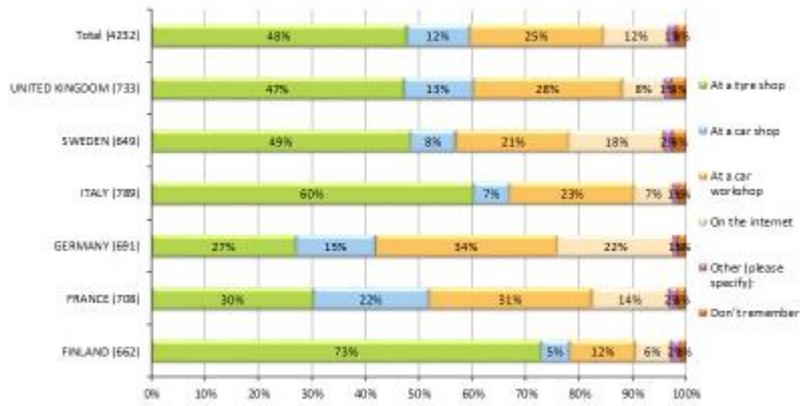


useneeds

Did you see the tyres displayed in a shop before the purchase?

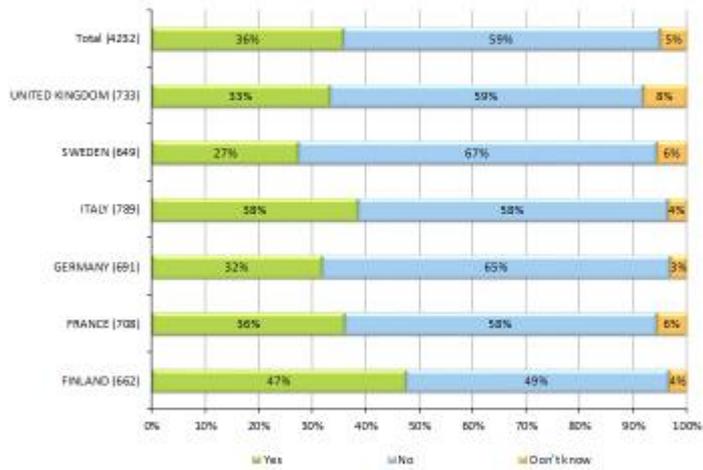


useneeds

Did you notice the tyre label when you were in the shop?

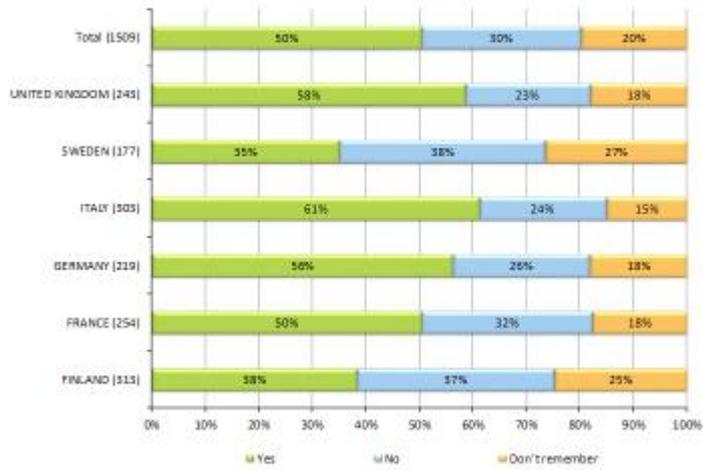


useneeds

Where was the tyre label placed?

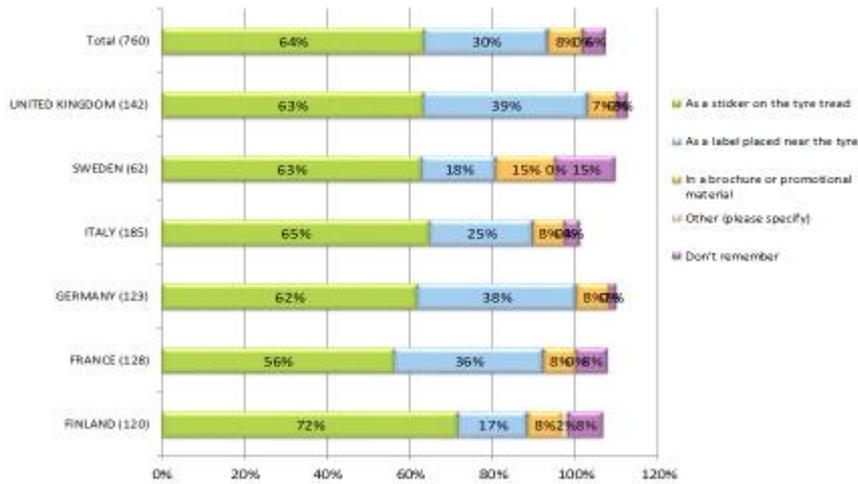


useneeds

Did the seller make you aware of the tyre label?

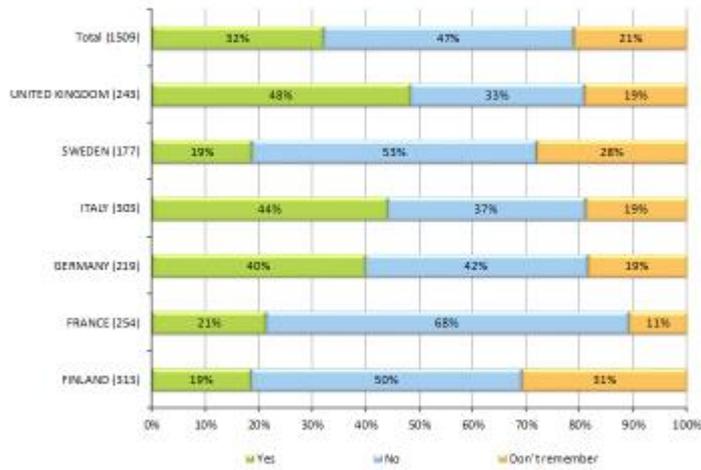

useneeds


Did you get help from the seller to understand the information on the tyre label?

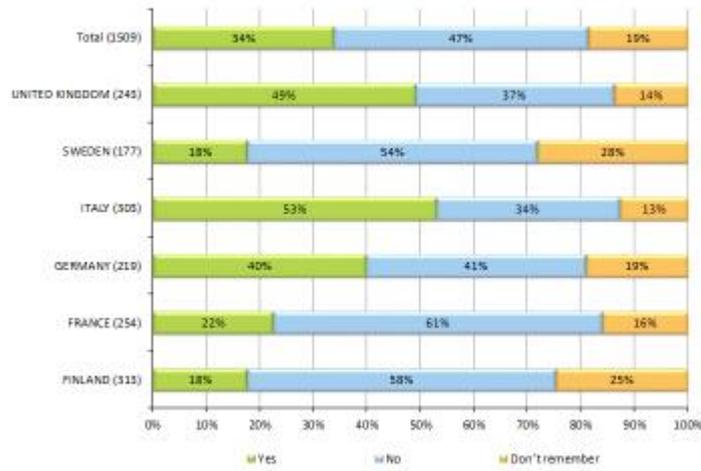

useneeds

Was any of the following information stated on/with the bill, when you purchased the tyres?


Please select all those that apply

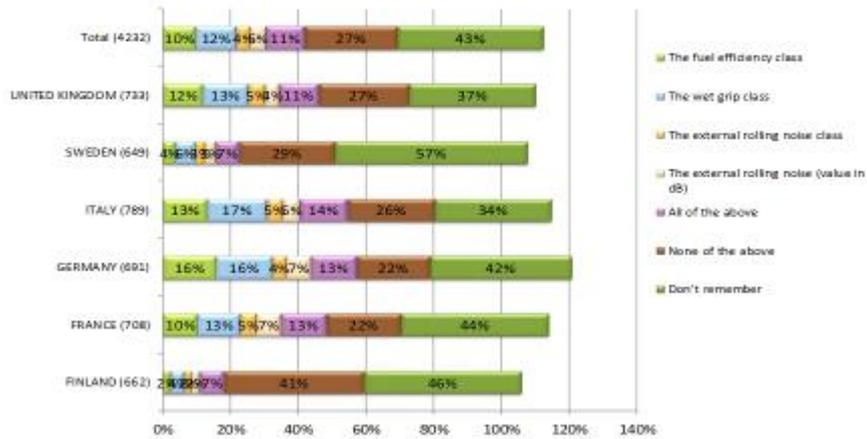

useneeds

Where did you find information about the tyre label before you made your last purchase?

Please select all those that apply

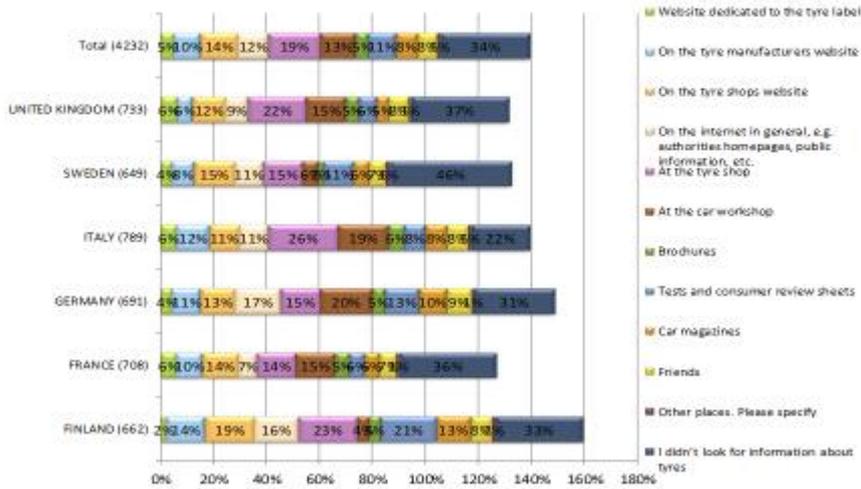

useneeds


Agenda

- Background
- All car owners
- Buyers of new tyres for passenger car 2013-2015

Buyers of new (not used) passenger car 2013-2015


useneeds

At the point of sale (in a shop), were you offered a choice between different types of tyres when you purchased your last new passenger car?

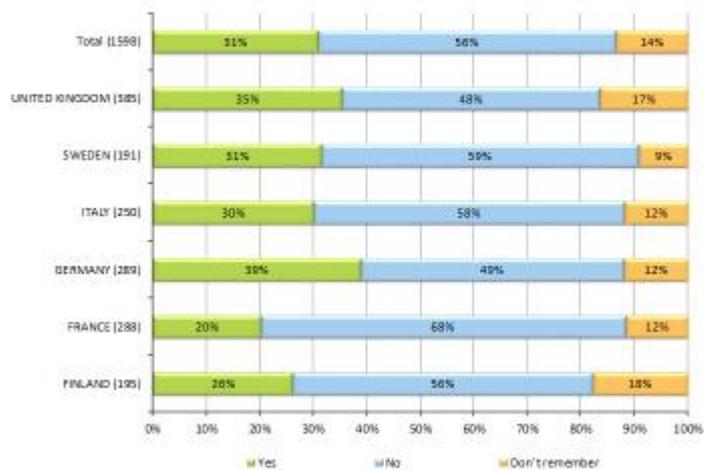

useneeds


Did the car retailer make you aware of the tyre label before the sale?

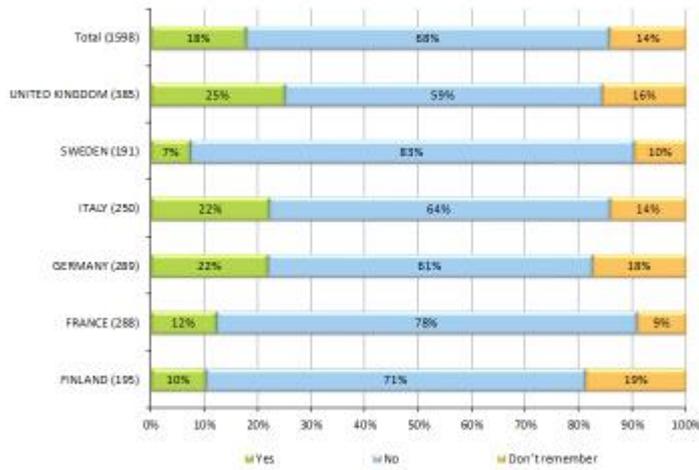

useneeds

Before the sale, did the car retailer provide you with information about each of the tyres offered for the following tyre performance areas:


The fuel efficiency class

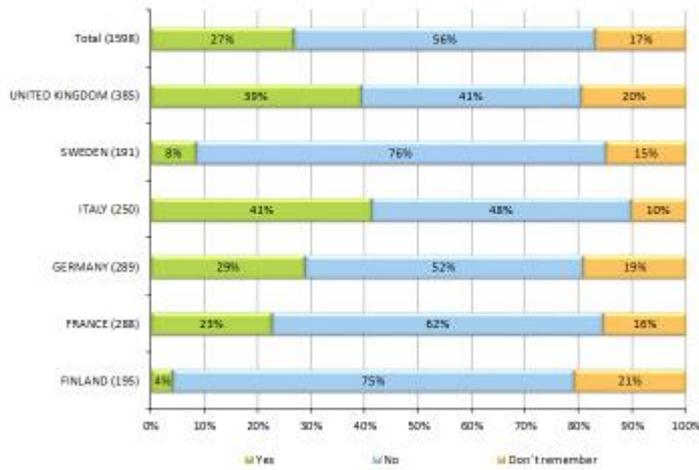

useneeds

Before the sale, did the car retailer provide you with information about each of the tyres offered for the following tyre performance areas:


The wet grip class

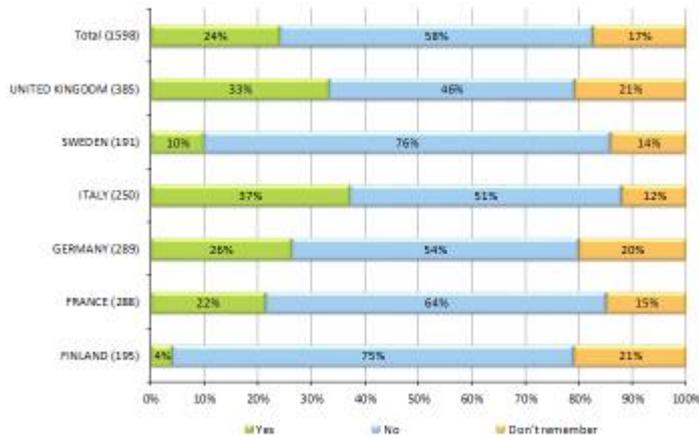

useneeds

Before the sale, did the car retailer provide you with information about each of the tyres offered for the following tyre performance areas:


The external rolling noise class

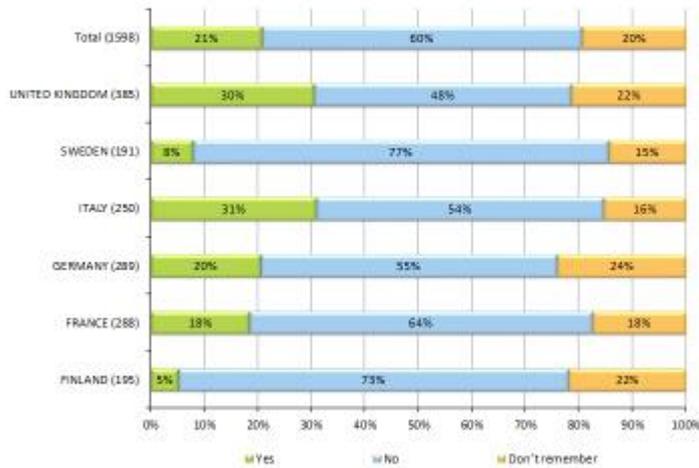

useneeds


Before the sale, did the car retailer provide you with information about each of the tyres offered for the following tyre performance areas:

External rolling noise (value in dB)

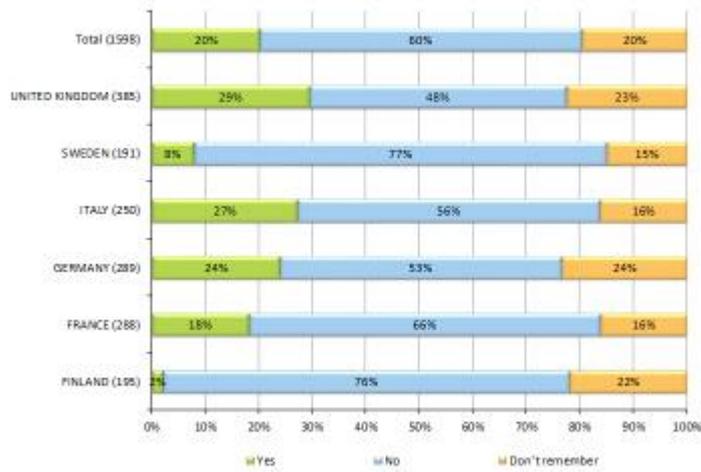

useneeds


Did you get help from the car retailer to understand the fuel efficiency class, the wet grip class and/or the external rolling noise?

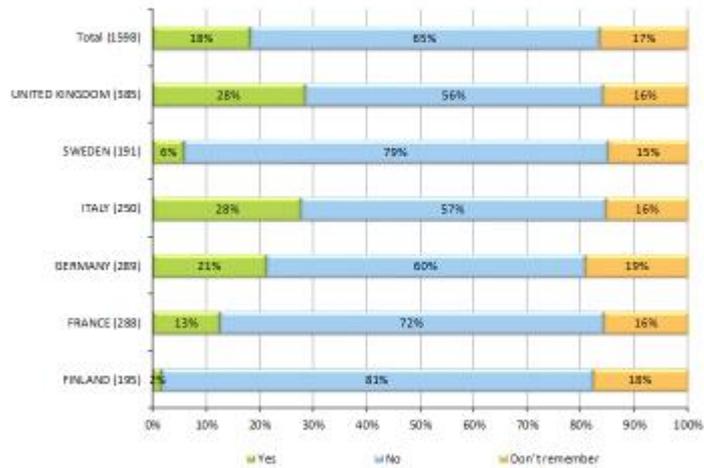

useneeds

Was the following information included in the technical promotional material?


The fuel efficiency class

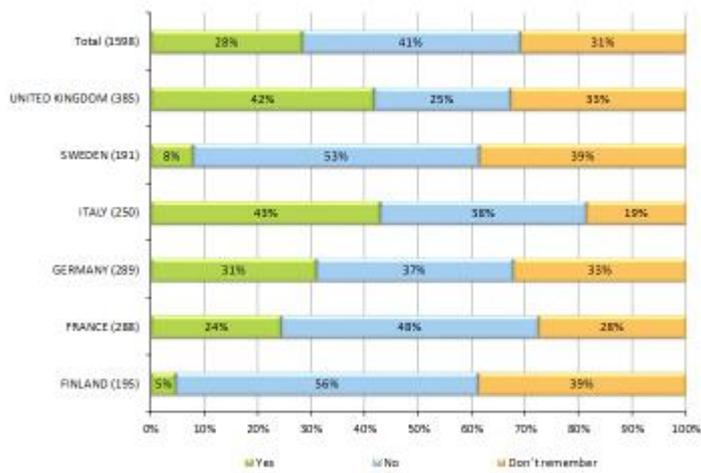

useneeds

Was the following information included in the technical promotional material?


The wet grip class

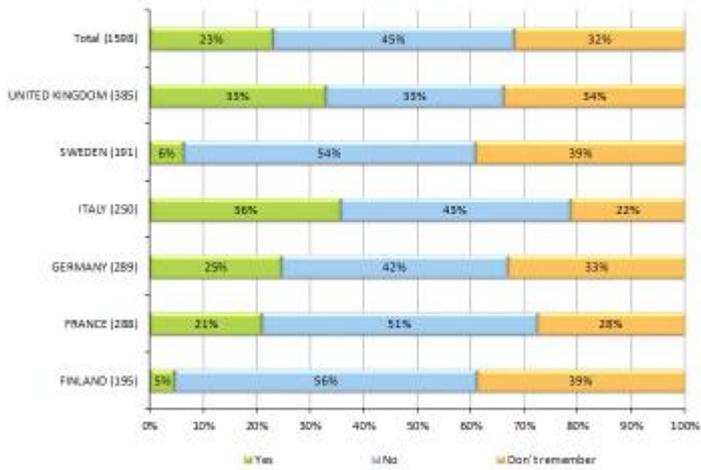

useneeds

Was the following information included in the technical promotional material?


The external rolling noise class

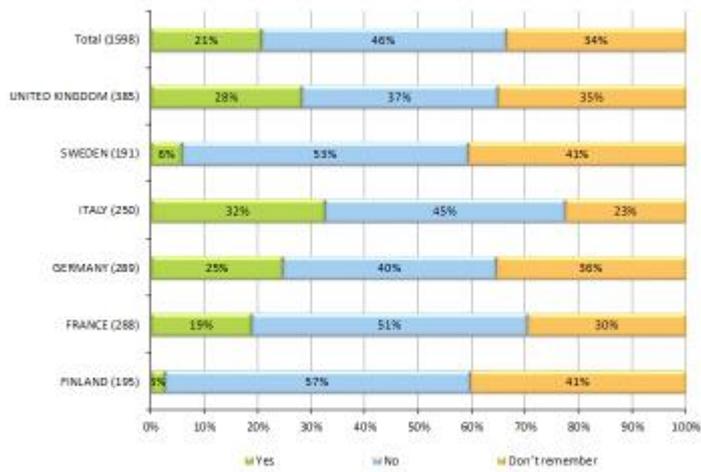

useneeds

Was the following information included in the technical promotional material?

External rolling noise (value in dB)

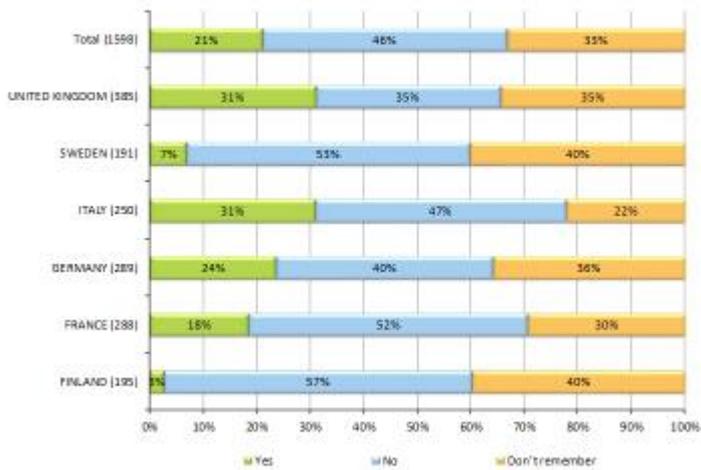

useneeds

Appendix 2 – Calculations of EPEC market data

In this appendix, the RRC market distributions from the original EPEC impact assessment and the average RRC values derived from them are shown.

The calculations were made by multiplying the market share in each RRC average with the average RRC value of that interval.

The table numbers and names refer to those in the EPEC impact assessment and its appendices.

C1 tyres

Table 4.11: Market Distribution of C1 Replacement Tyres (summer and winter) Reference case

RRC kg/t	6 to 7	7 to 8	8 to 9	9 to 10	10 to 11	11 to 12	Above 12	Average
Interval averages	6,5	7,5	8,5	9,5	10,5	11,5	13,3	
2012	0%	1%	6%	5%	16%	29%	44%	11.9
2013	0%	1%	7%	6%	19%	37%	29%	11.3
2014	0%	1%	8%	7%	22%	43%	19%	11.2
2015	0%	1%	9%	8%	27%	54%	0%	10.6
2016	1%	1%	9%	8%	27%	54%	0%	10.7
2017	1%	1%	11%	12%	39%	36%	0%	10.5
2018	3%	1%	13%	13%	47%	25%	0%	10.4
2019	6%	2%	17%	17%	63%	0%	0%	10.2
2020	10%	2%	17%	17%	63%	0%	0%	10.48

Table 4.13a: EU Market Distribution of C1 Replacement Tyres (summer and winter) by RRC – Dual Labelling (slow pace)

RRC kg/t	6 to 7	7 to 8	8 to 9	9 to 10	10 to 11	11 to 12	Above 12	Average
Interval averages	6,5	7,5	8,5	9,5	10,5	11,5	13,3	
2012	0%	1%	6%	5%	16%	29%	44%	11.9
2013	0%	1%	7%	6%	20%	37%	28%	11.3
2014	0%	1%	8%	7%	22%	42%	19%	11.1
2015	0%	2%	9%	9%	28%	51%	0%	10.6
2016	0%	2%	9%	10%	30%	48%	0%	10.5
2017	0%	3%	11%	16%	39%	30%	0%	10.2
2018	1%	4%	12%	19%	41%	23%	0%	10.1
2019	2%	6%	16%	28%	46%	0%	0%	9.4
2020	2%	8%	18%	31%	40%	0%	0%	9.4

Table 4.13b: EU Market Distribution of C1 Replacement Tyres (summer and winter) by RRC – Dual Labelling (fast pace)

RRC kg/t	6 to 7	7 to 8	8 to 9	9 to 10	10 to 11	11 to 12	Above 12	Average
Interval averages	6,5	7,5	8,5	9,5	10,5	11,5	13,3	
2012	0%	1%	6%	5%	16%	29%	44%	11.9
2013	0%	1%	7%	6%	20%	37%	28%	11.3
2014	0%	1%	8%	8%	23%	41%	18%	11.0
2015	0%	2%	9%	11%	30%	47%	0%	10.5
2016	1%	3%	9%	14%	33%	39%	0%	10.3
2017	1%	5%	12%	22%	38%	21%	0%	10.0
2018	3%	7%	15%	27%	34%	14%	0%	9.7
2019	6%	11%	22%	34%	28%	0%	0%	9.3
2020	10%	15%	26%	31%	17%	0%	0%	8.7

C1 wet grip

Table 4.5a: EU Market Distribution of C1 Summer Replacement Tyres by RRC and WG – 2012 reference case

Table 4.5b: EU Market Distribution of C1 Summer Replacement Tyres by RRC and WG – 2020 reference case

Table 4.10a: Market Distribution for RRC and WG, passenger cars (C1) summer – 2020 – dual labelling case (slow pace)

Table 4.10b: Market Distribution for RRC and WG, passenger cars (C1) summer – 2020 – dual labelling case (fast pace)

	A	B	C	D	Average
WG interval	>1.45	1.45-1.30	1.30-1.15	<1.15	
Interval averages	1.46	1.32	1.17	1.1	
Reference- 2012	4%	27%	59%	11%	1.23
BAU - 2020	4%	27%	59%	11%	1.23
	1.55	1.4	1.25	1.1	
slow - 2020	14%	28%	39%	20%	1.32
fast - 2020	14%	28%	39%	20%	1.32

C2 tyres

Table 6.7 Market Distribution of Replacement Tyres Sold in the EU p.a. by RRC (C2/summer) – Tyre Labelling RR only (slow pace)

RRC kg/t	5.5 to 6.5	6.5 to 7.5	7.5 to 8.5	8.5 to 9.5	9.5 to 10.5	above 10.5	Average
Interval averages	6	7	8	9	10	11,75	
2013	0%	1%	6%	23%	44%	26%	10.08
2014	0%	1%	7%	26%	49%	17%	9.87
2015	0%	1%	9%	32%	56%	0%	9.27
2016	0%	2%	11%	34%	52%	0%	9.28
2017	1%	9%	34%	24%	31%	0%	8.67
2018	2%	14%	38%	27%	18%	0%	8.37
2019	5%	22%	39%	33%	0%	0%	7.93
2020	8%	25%	38%	26%	0%	0%	7.61

Table 6.10 Market Distribution of Replacement Tyres Sold in the EU p.a. by RRC (C2/winter) – Tyre Labelling RR only (slow pace)

RRC kg/t	5.5 to 6.5	6.5 to 7.5	7.5 to 8.5	8.5 to 9.5	9.5 to 10.5	above 10.5	Average
Interval averages	6	7	8	9	10	11,75	
2013	0%	0%	0%	9%	37%	52%	10.62
2014	0%	0%	0%	14%	51%	34%	10.36
2015	0%	0%	2%	24%	73%	0%	9.62
2016	0%	0%	3%	27%	68%	0%	9.47
2017	0%	5%	32%	21%	41%	0%	8.90
2018	1%	10%	38%	26%	24%	0%	8.54
2019	3%	19%	42%	35%	0%	0%	8.02
2020	6%	23%	41%	28%	0%	0%	7.77

Table 6.8 Market Distribution of Replacement Tyres Sold in the EU p.a. by RRC (C2/summer) – Tyre Labelling RR only (fast pace)

RRC kg/t	5.5 to 6.5	6.5 to 7.5	7.5 to 8.5	8.5 to 9.5	9.5 to 10.5	above 10.5	Average
Interval averages	6	7	8	9	10	11,75	
2013	0%	1%	6%	23%	43%	25%	9.86
2014	0%	2%	9%	28%	45%	15%	9.64
2015	0%	3%	14%	36%	45%	0%	9.07
2016	0%	6%	19%	38%	36%	0%	8.96
2017	4%	19%	34%	25%	17%	0%	8.24
2018	12%	27%	32%	21%	7%	0%	7.76
2019	27%	32%	22%	19%	0%	0%	7.33
2020	48%	23%	20%	9%	0%	0%	6.90

Table 6.11 Market Distribution of Replacement Tyres Sold in the EU p.a. by RRC (C2/winter) – Tyre Labelling RR only (fast pace)

RRC kg/t	5.5 to 6.5	6.5 to 7.5	7.5 to 8.5	8.5 to 9.5	9.5 to 10.5	above 10.5	Average
Interval averages	6	7	8	9	10	11,75	
2013	0%	0%	0%	11%	38%	50%	10.67
2014	0%	0%	2%	18%	49%	30%	10.21
2015	0%	1%	6%	32%	60%	0%	9.43
2016	0%	2%	11%	38%	48%	0%	9.24
2017	2%	15%	33%	27%	22%	0%	8.44
2018	8%	24%	33%	24%	9%	0%	7.86
2019	24%	32%	18%	26%	0%	0%	7.46
2020	43%	24%	23%	11%	0%	0%	7.09

C3 tyres

Table 6.13 Market Distribution of Replacement Tyres Sold in the EU p.a. by RRC (C3/summer) – Tyre Labelling RR only (slow pace)

RRC kg/t	Below 4	4 to 5	5 to 6	6 to7	7 to 8	Above 8	Average
Interval averages	3,7	4,5	5,5	6,5	7,5	9,8	
2013	2%	11%	29%	35%	20%	4%	6.3
2014	2%	12%	29%	35%	20%	2%	6.2
2015	2%	13%	30%	35%	19%	2%	6.2
2016	3%	14%	30%	35%	19%	2%	6.3
2017	4%	19%	41%	23%	12%	0%	5.7
2018	8%	25%	45%	15%	7%	0%	5.4
2019	9%	27%	49%	10%	5%	0%	5.3
2020	13%	32%	45%	6%	3%	0%	5.0

Table 6.16 Market Distribution of Replacement Tyres Sold in the EU p.a. by RRC (C3/winter) – Tyre Labelling RR only (slow pace)

RRC kg/t	Below 4	4 to 5	5 to 6	6 to7	7 to 8	Above 8	Average
Interval averages	3,7	4,5	5,5	6,5	7,5	9,8	
2013	0%	2%	11%	32%	40%	15%	7.2
2014	0%	2%	12%	34%	41%	10%	7.0
2015	0%	3%	14%	36%	41%	6%	6.9
2016	0%	4%	16%	37%	39%	4%	6.8
2017	0%	6%	23%	45%	25%	0%	6.3
2018	1%	9%	28%	46%	15%	0%	6.1
2019	3%	13%	33%	43%	8%	0%	5.9
2020	6%	17%	36%	36%	4%	0%	5.6

Table 6.14 Market Distribution of Replacement Tyres Sold in the EU p.a. by RRC (C3/summer) – Tyre Labelling RR only (fast pace)

RRC kg/t	Below 4	4 to 5	5 to 6	6 to7	7 to 8	Above 8	Average
Interval averages	3,7	4,5	5,5	6,5	7,5	9,8	
2013	2%	12%	29%	34%	19%	4%	6.2
2014	3%	13%	30%	34%	18%	2%	6.1
2015	5%	16%	30%	32%	16%	1%	5.9
2016	8%	19%	31%	29%	13%	1%	5.8
2017	10%	23%	38%	19%	9%	0%	5.4
2018	19%	31%	34%	11%	4%	0%	5.0
2019	20%	33%	36%	7%	3%	0%	4.9
2020	38%	36%	21%	3%	1%	0%	4.5

Table 6.17 Market Distribution of Replacement Tyres Sold in the EU p.a. by RRC (C3/winter) – Tyre Labelling RR only (fast pace)

RRC kg/t	Below 4	4 to 5	5 to 6	6 to7	7 to 8	Above 8	Average
Interval averages	3,7	4,5	5,5	6,5	7,5	9,8	
2013	0%	2%	12%	32%	39%	15%	7.2
2014	0%	4%	15%	35%	38%	9%	7.0
2015	0%	6%	18%	36%	34%	5%	6.6
2016	0%	10%	22%	37%	28%	3%	6.5
2017	3%	16%	31%	36%	14%	0%	5.9
2018	10%	23%	35%	26%	6%	0%	5.5
2019	22%	29%	31%	15%	2%	0%	4.9
2020	40%	31%	22%	7%	0%	0%	4.5

Appendix 3 – Stock model and calculations

The stock model is based on sales data received directly from ETRMA and from ETRMA Statistics Edition 2014¹⁷⁹.

Sales data

Sales x 1000	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013
C1 tyres	214,598	223,766	230,201	240,829	244,323	233,384	235,228	259,833	270,755	235,592	237,125
C2 tyres	14,563	15,186	15,622	16,344	16,581	15,838	15,964	17,633	18,375	15,988	16,092
C3 tyres - all	17,153	17,592	17,448	18,613	19,781	16,611	14,793	17,101	18,173	14,584	15,502
C3 tyres - retreaded	5,391	5,529	5,484	5,850	5,800	5,193	4,561	5,546	5,567	4,978	4,867
C3 tyres - New	11,762	12,063	11,964	12,763	13,981	11,418	10,232	11,555	12,606	9,606	10,635

Sales x 1000	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024
C1 tyres	246,185	252,061	257,354	262,759	268,277	273,910	279,663	285,535	291,532	297,654	303,905
C2 tyres	16,707	17,939	18,316	18,700	19,093	19,494	19,903	20,321	20,748	21,184	21,629
C3 tyres - all	16,892	17,420	17,662	17,908	18,159	18,413	18,673	18,936	19,205	19,477	19,755
C3 tyres - retreaded	4,699	4,398	4,367	4,333	4,299	4,262	4,224	4,185	4,143	4,100	4,055
C3 tyres - New	12,193	13,022	13,296	13,575	13,860	14,151	14,448	14,752	15,061	15,378	15,701

Salesx1000	2025	2026	2027	2028	2029	2030
C1 tyres	310,287	316,803	323,456	330,248	337,183	344,264
C2 tyres	22,083	22,547	23,020	23,504	23,997	24,501
C3 tyres - all	20,038	20,459	20,888	21,327	21,775	22,232
C3 tyres - retreaded	4,008	4,092	4,178	4,265	4,355	4,446
C3 tyres - New	16,030	16,367	16,711	17,061	17,420	17,786

¹⁷⁹ [http://www.etrma.org/uploads/Modules/Documentsmanager/20150408---statistics-booklet-2014-final-\(modified\).pdf](http://www.etrma.org/uploads/Modules/Documentsmanager/20150408---statistics-booklet-2014-final-(modified).pdf)

Stock model

The tyre lifetimes (in years) used in the stock model are similar to those used in the Impact Accounting study¹⁸⁰.

Tyre type	C1	C2	C3 – new	C3 - retreaded
Lifetime, years:	2.5	1.8	1.7	1.7

Stock x 1000	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013
C1 tyres	214,598	438,364	561,266	582,913	600,253	598,122	590,774	611,753	648,202	636,264	608,094
C2 tyres	14,563	26,836	27,771	28,841	29,656	29,103	28,634	30,404	32,481	30,688	28,883
C3 tyres - all	17,153	29,599	29,762	30,827	32,810	30,458	26,421	27,456	30,144	27,305	25,711
C3 tyres - retreaded	5,391	9,303	9,354	9,689	9,895	9,253	8,196	8,739	9,449	8,875	8,352
C3 tyres - New	11,762	20,296	20,408	21,138	22,915	21,205	18,225	18,717	20,695	18,430	17,359

Stock x 1000	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024
C1 tyres	601,106	616,808	632,508	646,144	659,713	673,566	687,711	702,153	716,899	731,953	747,324
C2 tyres	29,581	31,305	32,667	33,353	34,053	34,768	35,499	36,244	37,005	37,782	38,576
C3 tyres - all	27,743	29,245	29,856	30,272	30,694	31,124	31,562	32,007	32,460	32,921	33,389
C3 tyres - retreaded	8,106	7,688	7,445	7,390	7,332	7,272	7,208	7,142	7,073	7,000	6,925
C3 tyres - New	19,638	21,557	22,411	22,882	23,362	23,853	24,354	24,865	25,387	25,920	26,465

Stock x 1000	2025	2026	2027	2028	2029	2030
C1 tyres	763,018	779,042	795,401	812,105	829,159	846,571
C2 tyres	39,386	40,213	41,057	41,920	42,800	43,699
C3 tyres - all	33,866	34,485	35,209	35,949	36,703	37,474
C3 tyres - retreaded	6,846	6,897	7,042	7,190	7,341	7,495
C3 tyres - New	27,021	27,588	28,167	28,759	29,363	29,979

¹⁸⁰ René Kemna, Van Holstein en Kemna B.V. (VHK), for The European Commission. "Ecodesign Impact Accounting; Part 1 – Status Nov. 2013". Delft, May 2014.

Appendix 4 – Summary of data from TOL and VACO databases

Data for the market label values from TOL and VACO was received from more than 30,000 tyre models from the years 2012-2013. The tables below summarised the average values found by counting the data.

C1 tyres

Rolling resistance averages.

RRC	TOL	rate %	VACO	Rate %
2012	9.69			
2013	9.41	-2.94%	9.43	
2014	9.40	-0.09%	9.32	-1.13%
2015	9.33	-0.73%	9.21	-1.15%
Average rate 2013-2015		-0.41%		-1.14%

Wet grip averages

Wet grip	TOL	rate %	VACO	Rate %
2012	1.36			
2013	1.39	2.16%	1.39	
2014	1.40	0.52%	1.40	0.99%
2015	1.41	0.71%	1.42	0.98%
Average rate 2013-2015		0.62%		0.99%

External rolling noise averages

External rolling noise	TOL	rate %	VACO	Rate %
2012	70.81			
2013	70.67	-0.20%	69.95	
2014	70.86	0.26%	69.90	-0.06%
2015	70.80	-0.08%	69.86	-0.06%
Average rate 2013-2015		0.09%		-0.06%

C2 tyres

Rolling resistance averages

RRC	TOL	rate %	VACO	Rate %
2012	8.54			
2013	8.71	1.88%	8.28	
2014	8.55	-1.73%	8.19	-1.11%
2015	8.50	-0.65%	8.09	-1.12%
Average rate 2013-2015		-1.19%		-1.11%

Wet grip averages

Wet grip	TOL	rate %	VACO	Rate %
2012	1.21			
2013	1.20	-0.67%	1.22	
2014	1.21	0.89%	1.23	0.60%
2015	1.21	0.06%	1.24	0.60%
Average rate 2013-2015		0.47%		0.60%

External rolling noise averages

External rolling noise	TOL	rate %	VACO	Rate %
2012	71.93			
2013	71.98	0.07%	71.61	
2014	72.07	0.13%	71.63	0.03%
2015	72.03	-0.07%	71.66	0.03%
Average rate 2013-2015		0.03%		0.03%

C3 tyres

Rolling resistance averages

RRC	TOL	rate %	VACO	Rate %
2012	5.92			
2013	6.19	4.53%	6.30	
2014	6.16	-0.57%	6.22	-1.27%
2015	6.13	-0.43%	6.14	-1.28%
Average rate 2013-2015		-0.50%		-1.28%

Wet grip averages

	TOL	rate %	VACO	Rate %
2012	1.04			
2013	1.05	1.52%	1.03	
2014	1.05	-0.47%	1.05	1.36%
2015	1.06	0.49%	1.06	1.34%
Average rate 2013-2015		0.51%		1.35%

External rolling noise averages

	TOL	rate %	VACO	Rate %
2012	71.78			
2013	72.19	0.58%	72.24	
2014	72.05	-0.19%	72.06	-0.25%
2015	71.71	-0.48%	71.88	-0.25%
Average rate 2013-2015		-0.33%		-0.25%

Appendix 5 – Rolling resistance development

Scenario calculations for rolling resistance development

C1 tyres

The change rates of RRC in the various scenarios:

	New scenarios			EPEC scenarios		
Scenario	BAU (TOL data)	OI	A 2030	EPEC BAU:	EPEC slow:	EPEC fast:
% Rate	-0.4%	-1.8%	-2.9%	-0.6%	-1.3%	-1.8%

Rolling resistance development for C1 tyres

year	2012	2013	2014	2015	2016	2017	2018	2019	2020
BAU	9.69	9.41	9.40	9.33	9.29	9.25	9.22	9.18	9.14
OI	9.69	9.41	9.40	9.33	9.17	9.01	8.85	8.69	8.54
Average A in 2030	9.69	9.41	9.40	9.33	9.06	8.80	8.54	8.29	8.05
EPEC No label	11.93	11.35	11.20	10.65	10.71	10.45	10.42	10.22	10.48
EPEC Slow, dual	11.93	11.32	11.09	10.58	10.54	10.23	10.14	9.43	9.41
EPEC fast, dual	11.93	11.32	11.04	10.52	10.34	9.96	9.74	9.26	8.72

year	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
BAU	9.10	9.06	9.03	8.99	8.95	8.92	8.88	8.84	8.81	8.77
OI	8.39	8.24	8.10	7.95	7.81	7.68	7.54	7.41	7.28	7.15
Average A in 2030	7.82	7.59	7.37	7.16	6.95	6.75	6.55	6.36	6.18	6.00
EPEC No label	10.42	10.36	10.30	10.24	10.18	10.12	10.07	10.01	9.95	9.90
EPEC Slow, dual	9.28	9.16	9.04	8.92	8.81	8.69	8.58	8.47	8.36	8.25
EPEC fast, dual	8.56	8.40	8.24	8.09	7.95	7.80	7.66	7.52	7.38	7.24

C2 tyres

The change rates of RRC in the various scenarios:

Scenario	New scenarios			EPEC scenarios		
	BAU (TOL data)	OI	A 2030	EPEC BAU:	EPEC slow:	EPEC fast:
% Rate	-1.19%	-2.1%	-3.5%	-0.9%	-2.0%	-2.6%

Rolling resistance development for C2 tyres

year	2012	2013	2014	2015	2016	2017	2018	2019	2020
BAU	8.54	8.71	8.55	8.50	8.40	8.30	8.20	8.10	8.00
OI	8.54	8.71	8.55	8.50	8.32	8.14	7.97	7.80	7.63
Average A in 2030	8.54	8.71	8.55	8.50	8.20	7.92	7.64	7.38	7.12
EPEC No label	10.13	10.06	9.91	9.58	9.61	9.35	9.18	8.84	8.84
EPEC Slow. dual	10.13	10.22	9.99	9.36	9.33	8.73	8.41	7.95	7.65
EPEC fast. dual	10.13	10.07	9.79	9.16	9.03	8.29	7.79	7.36	6.95

year	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
BAU	7.91	7.82	7.72	7.63	7.54	7.45	7.36	7.27	7.19	7.10
OI	7.47	7.31	7.15	7.00	6.85	6.70	6.56	6.42	6.28	6.15
Average A in 2030	6.87	6.64	6.40	6.18	5.97	5.76	5.56	5.37	5.18	5.00
EPEC No label	8.76	8.68	8.60	8.52	8.44	8.36	8.29	8.21	8.14	8.06
EPEC Slow. dual	7.50	7.35	7.20	7.05	6.91	6.77	6.63	6.50	6.37	6.24
EPEC fast. dual	6.77	6.60	6.43	6.26	6.10	5.94	5.79	5.64	5.49	5.35

C3 tyres

The change rates of RRC in the various scenarios:

Scenario	New scenarios			EPEC scenarios		
	BAU (TOL data)	OI	A 2030	EPEC BAU:	EPEC slow:	EPEC fast:
% Rate	-0.5%	-2.0%	-3.7%	-1.0%	-1.7%	-2.4%

Rolling resistance development for C3 tyres

year	2012	2013	2014	2015	2016	2017	2018	2019	2020
BAU	5.92	6.19	6.16	6.13	6.10	6.07	6.04	6.01	5.98
OI	5.92	6.19	6.16	6.13	6.01	5.89	5.78	5.66	5.55
Average A in 2030				6.13	5.91	5.69	5.48	5.28	5.09
EPEC No label	6.51	6.44	6.67	6.36	6.29	6.01	5.80	5.67	5.59
EPEC Slow, dual		6.57	6.40	6.39	6.42	5.83	5.58	5.43	5.17
EPEC fast, dual		6.49	6.34	6.12	5.98	5.54	5.11	4.90	4.47

year	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
BAU	5.95	5.92	5.89	5.86	5.83	5.80	5.77	5.75	5.72	5.69
OI	5.44	5.33	5.23	5.13	5.03	4.93	4.83	4.73	4.64	4.55
Average A in 2030	4.90	4.72	4.55	4.38	4.22	4.06	3.92	3.77	3.63	3.50
EPEC No label	5.53	5.48	5.42	5.37	5.31	5.26	5.21	5.16	5.10	5.05
EPEC Slow, dual	5.08	4.99	4.91	4.83	4.74	4.66	4.59	4.51	4.43	4.36
EPEC fast, dual	4.37	4.26	4.16	4.06	3.96	3.86	3.77	3.68	3.59	3.50

Appendix 6 – Wet grip development

Scenario calculations for rolling resistance development

C1 tyres

The change rates of wet grip index in the various scenarios:

	New scenarios		EPEC scenarios	
Scenario	BAU (TOL data)	OI	No label	C1 dual labelling
% Rate	0.6%	0.9%	0.0%	0.9%

Wet grip index development for C1 tyres

year	2012	2013	2014	2015	2016	2017	2018	2019	2020
BAU		1.39	1.40	1.41	1.42	1.43	1.43	1.44	1.45
OI		1.39	1.40	1.41	1.42	1.43	1.44	1.46	1.47
EPEC No label	1.23	1.23	1.23	1.23	1.23	1.23	1.23	1.23	1.23
EPEC dual labelling	1.23	1.24	1.25	1.26	1.27	1.28	1.29	1.30	1.32

year	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
BAU	1.46	1.47	1.48	1.49	1.50	1.51	1.52	1.53	1.53	1.54
OI	1.48	1.49	1.51	1.52	1.53	1.55	1.56	1.57	1.59	1.60
EPEC No label	1.23	1.23	1.23	1.23	1.23	1.23	1.23	1.23	1.23	1.23
EPEC dual labelling	1.33	1.34	1.35	1.36	1.38	1.39	1.40	1.41	1.43	1.44

C2 tyres

The change rates of wet grip index in the various scenarios:

	New scenarios	
Scenario	BAU (TOL data)	OI
% Rate	0.47%	1.2%

Wet grip index development for C2 tyres

year	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
C2 BAU	1.20	1.21	1.21	1.21	1.22	1.23	1.23	1.24	1.24	1.25	1.25	1.26	1.27	1.27	1.28	1.28	1.29	1.30
OI	1.20	1.21	1.21	1.22	1.24	1.25	1.27	1.28	1.30	1.32	1.33	1.35	1.36	1.38	1.40	1.42	1.43	1.45

C3 tyres

The change rates of wet grip index in the various scenarios:

	New scenarios	
Scenario	BAU (TOL data)	OI
% Rate	0.51%	1.4%

Wet grip index development for C3 tyres

year	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
C3 BAU	1,05	1,05	1,06	1,06	1,07	1,07	1,08	1,09	1,09	1,10	1,10	1,11	1,11	1,12	1,12	1,13	1,14	1,14
OI	1,05	1,05	1,06	1,07	1,09	1,10	1,12	1,13	1,15	1,17	1,18	1,20	1,21	1,23	1,25	1,26	1,28	1,30

Appendix 7 – External rolling noise development

Forecast of development for external rolling noise measured values. External rolling noise was not forecasted in the EPEC impact assessment.

C1 tyres

The change rates of external rolling noise measured values in the various scenarios:

	New scenarios	
Scenario	BAU (TOL data)	OI
% Rate	0.1%	-0.2%

External rolling noise measured values development for C1 tyres

year	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
C1 BAU	70,67	70,86	70,80	70,87	70,94	71,00	71,07	71,13	71,20	71,26	71,33	71,40	71,46	71,53	71,59	71,66	71,73	71,79
C1 OI	70,67	70,86	70,80	70,65	70,49	70,34	70,18	70,03	69,87	69,72	69,57	69,41	69,26	69,11	68,95	68,80	68,65	68,5

C2 tyres

The change rates of external rolling noise measured values in the various scenarios:

	New scenarios	
Scenario	BAU (TOL data)	OI
% Rate	0.03%	-0.3%

External rolling noise measured values development for C2 tyres

year	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
C2 BAU	71,98	72,07	72,03	72,05	72,07	72,09	72,11	72,13	72,15	72,17	72,19	72,21	72,23	72,25	72,27	72,29	72,31	72,33
C2 OI	71,98	72,07	72,03	71,78	71,54	71,31	71,07	70,83	70,59	70,36	70,12	69,89	69,66	69,42	69,19	68,96	68,73	68,50

C3 tyres

The change rates of external rolling noise measured values in the various scenarios:

Scenario	New scenarios	
	BAU (TOL data)	OI
% Rate	-0.33%	-0.3%

External rolling noise measured values development for C3 tyres

year	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030
C3 BAU	72,19	72,05	71,71	71,47	71,23	71,00	70,76	70,52	70,29	70,05	69,82	69,59	69,35	69,12	68,89	68,66	68,43	68,21
C3 OI	72,19	72,05	71,71	71,49	71,27	71,06	70,84	70,62	70,41	70,19	69,98	69,77	69,55	69,34	69,13	68,92	68,71	68,50

Appendix 8 – Letter to the European Commission regarding abrasion and particles from tyres and Reply letter



18 May 2015

Inclusion of additional parameters in the impact assessment study on the EU Tyre Label

Dear Mr Hodson,
Dear Mr Moreno Acedo,

We are writing to ask you to include further parameters – on the abrasion and durability of tyres, and the impact of the tyre label on consumer understanding and purchasing decisions - in the upcoming impact assessment study on the EU Tyre Label. Article 14(1) of Regulation 1222/2009/EC already requires the Commission to look into the related aspect of mileage and we trust you will consider this issue seriously in the review of this important legislation.

There is a growing body of evidence, including the recent JRC study¹ on the subject, that non-exhaust traffic sources, such as tyre and brake wear, are responsible for a significant amount of particle (PM) pollution. The relative share of this source of air pollution is rising, due to the fact that, while exhaust emissions are regulated by the Euro standards, there is no EU source policy in this area.

While we recognise that the EU Tyre Label is not the right framework to control emissions from tyres, we believe that its review represents a good opportunity to start gathering information on this issue. Abrasion has a direct impact on the amount of particles that are being released into the air. It also correlates with the durability of tyres. Reducing abrasion and improving durability could potentially reduce running costs for drivers and fleet operators, even if it were to increase the purchase price of tyres.

However, the issue of abrasion is not fully understood when it comes to:

- its role in particulate matter emissions
- the types of particulate matter emitted from tyres, and how noxious they are
- possible trade-offs with the other three aspects of the label (fuel efficiency, safety and noise)
- the effectiveness of the EU Tyre Label in raising awareness on abrasion in order to stimulate the development of low emission tyres and alternative tyre materials

The upcoming impact assessment should look into these issues.


¹ "Non-exhaust traffic related emissions. Brake and tyre wear PM", JRC, <http://publications.jrc.ec.europa.eu/repository/bitstream/JRC89231/jrc89231-online%20final%20version%202.pdf>

Air pollution is the leading environmental health problem in the EU, responsible for over 400,000 premature deaths as well as respiratory and other diseases². The new WHO report puts the cost of these to the economies in Europe at US\$ 1.6 trillion every year.³ Air pollution also damages nature and biodiversity through eutrophication and acidification. The vast majority of EU Member States currently do not comply with the limit values of the Ambient Air Quality Directive (2010/50/EC). Past experience has shown that, in order to improve air quality, it is crucial to assess all possibilities of reducing pollution at its source.

Noting the possible trade-offs, we would also welcome the impact assessment study looking at consumers' understanding of the tyre label and how the existing ratings are influencing consumer choice.

We remain at your disposal should you wish to discuss this further.

Yours sincerely,



Anna Lisa Boni
EUROCITIES Secretary-General



Stephen Russell
ANEC Secretary-General



AIR Group



Jos Dings
Director, Transport & Environment

CC: Philippe Jean, Head of Unit G3, Sustainable Mobility and Automotive Industry, DG Growth

Maciej Szymanski, Policy Officer, Unit G3, Sustainable Mobility and Automotive Industry, DG Growth

² “Review of evidence on health aspects of air pollution – REVIHAAP Project”, WHO,
http://www.euro.who.int/_data/assets/pdf_file/0004/193108/REVIHAAP-Final-technical-report-final-version.pdf?ua=1

³ “Economic cost of the health impact of air pollution in Europe: Clean air, health and wealth”, WHO,
<http://www.euro.who.int/en/media-centre/events/events/2015/04/ehp-mid-term-review/publications/economic-cost-of-the-health-impact-of-air-pollution-in-europe>

Ref: ANEC-ML-2015-0071

ANEC address line:

European Association for the Co-ordination of Consumer Representation in Standardisation, AISBL
Av. de Tervuren 32, box 27 – B-1040 Brussels, Belgium - phone +32-2-743 24 70 - fax +32-2-706 54 30; e-mail: anec@anec.eu - internet: www.anec.eu

Transport & Environment address line:

Transport & Environment, AISBL Square de Meeus 18, 1050 Brussels, Belgium - phone +32-2-851 0202 ; e-mail: info@transportenvironment.org - internet: www.transportenvironment.org

EUROCITIES address line:

EUROCITIES, Square de Meeus 1, 1000 Brussels, Belgium – phone +32 2 08 88; e-mail: info@eurocities.eu - internet: www.eurocities.eu

The Air Quality Initiative of Regions (AIR Group)* was founded in 2011 and represents 13 EU regions working together on air quality: Baden-Württemberg, Catalunya, Emilia-Romagna, Greater London, Hessen, Madrid, Lombardia, Piemonte, Randstad Region, Steiermark, Veneto and Vlaanderen.



EUROPEAN COMMISSION
DIRECTORATE-GENERAL FOR ENERGY

Directorate C - Renewables, Research and Innovation, Energy Efficiency
C.3 - Energy efficiency

Brussels, *8 June 2015*
ENER/C3/PH/JMA/tp/ARES(2015)S-2613517

Ms Anna Lisa Boni,
EUROCITIES Secretary-General
Mr Stephen Russell,
ANEC Secretary-General,
Mr Jos Dings,
Director, Transport & Environment
AIR Group

Dear Sirs, Madam,

Thank you for your letter of 18 May 2015 suggesting the inclusion of a number of parameters, such as abrasion, the durability of tyres and the impact of the tyre label on consumer understanding and purchasing decisions, in the impact assessment study on the EU tyre label.

As you probably know, the review of Regulation (EC) No 1222/2009 on the labelling of tyres started recently. It will assess a number of issues related to the improvement and the optimisation of the EU energy labelling scheme for tyres, including consumers' understanding of the label and how it is influencing consumer choice.

The review will also look at the durability of tyres and the possibility of including in the tyre labelling scheme the typical tyre lifetime under specific use and maintenance conditions. In this context, it is however relevant to bear in mind that the durability of a tyre does not depend on its age, but on its use and maintenance.

In relation to the abrasion issue, as you indicate, the EU tyre labelling scheme is not the right legislative framework to control emissions from tyres. Therefore, while the review will look at qualitative aspects of this issue, a detailed quantitative assessment as you propose is not in our view appropriate at this stage.

Thank you for your interest in our work and I look forward to your continued engagement to ensure a successful review of the EU tyres labelling scheme.

Yours sincerely,

Paul Hodson